

# ONESOURCE™ INDIRECT TAX INTEGRATION FOR SAP

## CONFIGURATION GUIDE FOR ONESOURCE TABLES

PRODUCT VERSION 6.7.X.X

Document Version 1

## Copyright Notice

© 2022 Thomson Reuters. All rights reserved. Republication or redistribution of Thomson Reuters content, including by framing or similar means, is prohibited without the prior written consent of Thomson Reuters. Thomson Reuters and the Kinesis logo are trademarks of Thomson Reuters and its affiliated companies. [More information can be found here.](#)

## License Agreements

Proprietary information of Thomson Reuters. Disclosure, use, or reproduction without the written authorization of Thomson Reuters is prohibited.

In compliance with the license agreements for the Open-Source Libraries leveraged by Thomson Reuters. Our customers can obtain copies of these libraries by contacting Technical Support at <https://tax.thomsonreuters.com/support/ONESOURCE/indirect-tax/>. The software documented within is Patent Pending in the United States.

## DOCUMENT HISTORY

VERSION NUMBER	VERSION DATE	SUMMARY
1	July 2022	First release of ONESOURCE Indirect Tax Integration Configuration Guide for ONESOURCE Tables 6.7.X.X



# TABLE OF CONTENTS

Introduction .....	1
Welcome to ONESOURCE Indirect Tax Integration for SAP .....	1
Audience .....	2
Prerequisites .....	2
Resources .....	3
Support Protocol .....	4
Style Conventions .....	5
ONESOURCE Indirect Tax Configuration Requirements .....	6
Common Concepts .....	6
The User Menu .....	8
Table Configuration for Installation .....	11
Group Configuration .....	14
Base, Route, and Journey Configuration .....	18
Other Configuration Tables .....	25
BAPI Configuration for Posting .....	67
Tax Data Mapping .....	75
Flexible Field Mappings .....	75
Miscellaneous Field Mapping Notes: .....	95
Address Mapping .....	96
Registration Number Mapping .....	103
Determination Setup .....	110
Tax Code Qualifier Configuration .....	110
Tax Code Qualifier Examples .....	112
Maintaining Zone Aliases .....	117
APPENDIX 1: Other Features .....	121
Data Popup Tool .....	121
Reconciliation Extract Report .....	123
Adding Custom Fields to /IDT/D_TAX_DATA Table .....	125
Special Note on VF06 Background Batch Jobs .....	126
APPENDIX 2: References .....	127
List of Journeys .....	127
List of Routes .....	133
List of Bases .....	135
List of Delivered Tables .....	141
Reserved Attributes .....	146

List of Transaction Codes .....	147
Reconciliation Extract Program References .....	149

# INTRODUCTION

## Welcome to ONESOURCE Indirect Tax Integration for SAP

Corporations using SAP as their Enterprise Resource Planning (ERP) system can simplify their worldwide Indirect Tax requirements by implementing ONESOURCE Indirect Tax Suite. The suite includes Determination, Integration for SAP, Reporting, and Compliance. The benefits provided by ONESOURCE Indirect Tax Suite are:

- Fast, accurate sales, use, consumer's use tax, and VAT results.
- Monthly tax rate and rules updates for over 175 countries.
- Integrated tax calculation with SAP minimizing user decisions and tax errors.
- Removal of the need to change SAP tax codes each time a rate/rule changes, eliminating business interruptions, and running out of tax codes in SAP.
- Complete audit database from which you can generate both standard and custom reports as well as returns.

ONESOURCE Indirect Tax Integration for SAP 6 is a new interface designed, built, and maintained by Thomson Reuters. It's a new global tax integration solution designed from the ground up with integration pointing into SAP ECC application modules as desired. It consists of a data collector, tax interface, and return process of tax results to the calling application with G/L integration in support of downstream SAP processes such as standard VAT reports and returns processing. It makes use of the SOAP (Simple Object Access Protocol) provided by SAP to communicate with ONESOURCE Indirect Tax Determination. The new Integration enables worldwide tax calculations, including VAT, US Sales and Use Tax, and other country-specific taxation.

The interface is entirely built within the SAP Development Workbench, including a user menu for all interface related configurations, setups, and reports. The interface has a new field mapping solution allowing a Tax Business Analyst to map SAP data to Determination and vice versa via a customization table, eliminating most of the user-exit coding of the past. Tax calculation logs can be accessed via a transaction with a search function from within SAP greatly simplifying tax setup, analysis, and troubleshooting.

## Audience

If you are responsible for overseeing setting up ONESOURCE Indirect Tax Integration for SAP, you will need to coordinate help from the following people:

- SAP Business Systems Analyst
- SAP Configuration Consultant
- SAP Technical Resource (ABAP Programmer)
- SAP Security Contact
- Tax Professional

Make this guide available to each of these contributors to ensure you have a successful installation.

## Prerequisites

For a seamless and successful deployment of Integration for SAP we highly recommend that you follow the instructions in the guides listed below in order:

- Configuration Guide for ONESOURCE Tables
- Configuration for SAP Tables
- Installation and Programmers Information
- Installation Instructions (User Guide)
- Special Functions

When working on Integration for SAP you must have knowledge of the SAP tax features, covering all aspects of FI, MM, and SD and have spent time either as an expert configurator or consultant in these areas. Because the setup of tax integration with ONESOURCE Indirect Tax also includes technical work in the ABAP Workbench, such as data dictionary changes and ABAP coding, you must be able to understand and interpret these changes as well. We recommend that you assemble a team to implement this product because it requires both functional and technical input. Your team should include someone who understands business requirements and processes, as well as someone who can implement the required software changes.

Please take the following into account before setting up the Integration for SAP:

- This guide assumes a fresh install of the Integration for SAP. Customers who are upgrading from a prior 5.x version of Integration should contact Thomson Reuters Indirect Tax.
- Minimum SAP system version must be ECC 6.0, EHP 5. Please see tested platforms by Thomson Reuters in Platform Information section.
- Minimum Determination version must be at 5.5 or greater due to the use of the Tax Code Qualifier function.
- It is assumed that the persons who install, configure, and use the tax interface in SAP have some basic understanding of the overall ONESOURCE Indirect Tax Suite of products and how they interact with each other.

## Resources

RESOURCE	DESCRIPTION
Customer Support	Look for answers in the Knowledge Base, or open a support ticket.
Installation Instructions (User Guide)	This guide provides an overview of the architecture and business processes as they relate to Sales and Use tax, as well as VAT scenarios in FI, SD, and MM. The target audiences are the Business Systems Analysts, Consultants, and Tax Professionals who set up the tax processes in SAP.
Installation and Programmers Guide	<p>This guide instructs you how to install the Integration for SAP. The target audiences are the Basis personnel who will process the application of the transports to the SAP system and the ABAP programmers who will perform the required <code>INCLUDE</code> statements within the user exits and other coding blocks. There is also discussion in this manual for the ABAP programmer regarding customization logic and how custom additions to the programs should be added to the system if needed in the future.</p> <p>This guide describes the supported combinations of operating systems, databases, and application servers/web containers.</p> <p>This guide lists the end-of-life dates for ONESOURCE Indirect Tax Integrations for SAP.</p> <p>Consult this guide to see which combinations of software Thomson Reuters tests with Integrations.</p>

Configuration Guide SAP tables	This guide instructs you how to configure and set up SAP tables and processes to enable tax calculations to meet your unique requirements.
Configuration Guide ONESOURCE tables	This guide instructs you how to configure and set up ONESOURCE Indirect Tax tables and processes to enable tax calculations to meet your unique requirements.
Configuration Guide for Special Functions	This guide instructs you how to configure and set up SAP and Integration tables and processes to enable tax calculations to meet your unique requirements for special functions within SAP, including Plants Abroad, Cash Discounts, Deferred Taxes, Service Entry Sheets, Settlement Management, and Tax-only invoices.
Vendor Charged Tax (VCT) Guide	<p>This guide describes functionality for integrating Indirect Tax Enterprise Cloud VCT calculations with SAP Global Next transactions.</p> <p>This functionality is for the United States only.</p>

## Support Protocol

The ONESOURCE Indirect Tax Integration for SAP is built, maintained, and owned by Thomson Reuters Tax & Accounting Indirect Tax. The business unit has a dedicated group of SAP Business Systems Analysts, ABAP Programmers, and Quality Assurance people who have built this product. We follow SAP best practices, development standards, and strive to minimize the impact this solution will have on your SAP environment. With any 3rd party Add-On in SAP, the vendor providing the solution is responsible for support of that Add-On. In the case of an issue with the ONESOURCE Indirect Tax Integration for SAP please follow these simple steps to open a support ticket with Thomson Reuters:

1. Identify the potential issue and gather all necessary facts (log files, scenarios, configurations, screen prints).
2. Provide steps to reproduce the scenario leading to the issue.
3. Provide system environment information such as your SAP Version, EHP and SP level, as well as the Integration version.
4. Open a support ticket with Indirect Tax at <https://tax.thomsonreuters.com/support/ONESOURCE/indirect-tax/>

## Style Conventions

Style conventions provide a guide as to how to interpret information.

**Bold** text indicates most user interface elements, such as:

- Data you are expected to enter, such as in a text field
- Pages, buttons, tabs, and field names
- Dialog boxes, drop-down lists, selections within lists, and check box titles
- Windows
- Menu items

*Italic* text indicates the following:

- File and folder names
- Software programming terminology and executable files
- Document titles

CAPITALIZED text indicates keyboard commands, such as ENTER, or database components.

*Courier* text indicates command-line input/output.

<brackets> indicate user entry. For example, <host> indicates you should replace the text and angle brackets with your server name.

Book titles are shown in italics and sections within a book are in quotation marks, such as “Tips and Tricks” in the *ONESOURCE Indirect Tax User Guide*.

 Indicates suggestions or additional, detailed information.

 Indicates important text that should be carefully reviewed before proceeding.

# ONESOURCE INDIRECT TAX CONFIGURATION REQUIREMENTS

This chapter covers the configuration requirements within the Integration module.

## Common Concepts

Many of the configuration tables in the Standard Setup, Customer Setup, and Reports sections of the User Menu contain columns that are of the same function. Rather than explain them for each table repetitively we will discuss the column function in this section as its function applies to all tables in the same way.

### *Standard Check Box Column*

This column is used to identify a mapping line as being from the standard mappings that are provided by Thomson Reuters as pre-delivered content. As a customer you will not be able to check this field in the configuration tables. The field can be ignored for your purpose. Notice in the standard version of the table all the lines in this view have the box checked. This is a tool that will make it easier for debugging your system and also to allow for updates in the future. Rows marked as standard will be updated with software updates. Rows that are not marked as standard will not be changed with a software update thereby leaving your custom configuration intact.

### *Sort Order Column*

Many of the configuration screens have a Sort Order field. The system processes the line with the lowest Sort Order first and then the line with the next highest Sort Order and so on. The Sort Order field for customer updated tables must be greater than or equal to sequence 1000001 through 999999. Sort Order fields that are part of the standard tables use Sort Order sequence from 0 to 100000. This way customer configuration is of a higher sort number and will be used to override or augment the standard mappings that we provide as part of the standard setup.

For the Proxy only: The line with the lowest Sort Order is checked first to see if it is valid for the current situation. If it is valid then it is selected. If it is not valid then the line with the next highest Sort Order is checked and so on.

## Active Flag Column

This check box column is used to turn on or off the line in the configuration table. If checked then the configuration is active. If the box is unchecked, then the configuration line will remain in the table for future use but it will not be used. This can be very helpful when debugging an error in the configuration or testing different options to solve a business need.

## Journey Name Column

In this column you would first establish which journey you want to use for the new configuration. To choose the correct journey name, you would ask yourself if this field is part of what you want to send to the request data going to Determination or is it part of the data that will be coming back on the response. Is it data at the header level of a document or is it data stored at the line level? Is this an SD order, billing, PO, L1V invoice, or FI generated document, etc.?

## Route Name Column

With this column a system user can direct a specific configuration to only be applicable to a single route by entering the route name in this column. The mapping will then only be applicable if the listed route is used in the transaction.

## Route Group Column

With this column a system user can reduce the number of repetitive mapping lines if the same configuration is required for several routes within the same journey. In this case the user would first populate the route group table, then assign a list of routes to the route group, and then use this route group in the configuration table to assign the same value to the desired group of routes.

 You would not use both the route name column on the same line as the route group column to designate the path of the transaction.

## Company Code Column

Configurations can also be limited by company code using this column to designate the applicable company code.

## *Country Group Column*

In this column you have the option to specify your configuration line to further limitation based on group of countries based on the creation and assignment of a country group name. To do this you would first create a country group name as noted in the Country Group table, and then assign a country or list of countries to the newly named country group in the country group assignment table.

## *Description Column*

This column is used to describe the mapping for ease of tracking and reference notes.



An asterisk (\*) can be used as a wildcard for most of the columns indicating that any value is an allowed match.

## *Product Column*

The product column has been added (directly to the right of the Standard checkbox on some standard view tables) because of the release of the new Goods Movement Product that was re-designed to work with our new Integration approach. With many of our tables being shared by the two product offerings we need a way to segregate the table entries by product so that future updates to the product will not conflict and overwrite lines through the transport process. At this point you will see either "GM" for lines associated with the Goods Movement product and "GN" for lines that were added as needed for the Global Next Integration. As other products may be added to this new structure and table logic in the future, new product designators will be added to keep them straight and avoid any conflicts to future product release updates. You will not need to be concerned with this column as it is only used on standard setup (display only) views of the tables and is used internally in the upgrade transport creation process.

## **The User Menu**

The ONESOURCE Indirect Tax menu is accessed through the **User Menu** (Ctrl+F10) and is only available to you if you have been granted access through your security profile to the correct user role. You will not see the ONESOURCE menu if you click on the standard SAP menu option.

The menu for ONESOURCE Indirect Tax is broken up into sub areas as shown above. Explanation of the sub menus is noted below.


### *Standard Setup Display Only Menu*

Within the new ONESOURCE Indirect Tax menu the first section is a list of table configurations that are provided as standard setup for Integration. The tables are intentionally view only and are not changeable by the system user. However, in most of those tables a matching table is provided in the Customer Setup section of the menu, which gives the system user the ability to override or augment the configuration in the standard setup view. By segregating the standard setup from user additions and overrides we can provide better support to our users by our Professional Services and Customer Support teams. Segregating the tables will allow them to make quicker identification of problems for issue resolution. It also allows Thomson Reuters to deliver new functionality at a later point without negatively impacting customer's configurations and setups. They also allow the system user to quickly identify their additions in a separate area.

### *Customer Setup and Extensions*

This menu is used by the user to access the ONESOURCE configuration tables that are stored in the /IDT/ namespace of SAP. The menu is broken down further into sub areas to organize the tables by configuration area or task. A system user role may only have display access to this area however an administrator role authorization will have ability to display, change, and create depending on the table's properties.

- **Basic Setup at Install:** Is used by the ABAP programmer that is doing the installation of the software to set the proxy configuration pointing to the Determination calculation URL and create the number range that is needed for log entries in the system.
- **Customer Setup:** Is used to set up the customer view of several tables that are also within the standard setup display only section. Users can override or add to the standard tables in this area.
- **Configuration Tables:** Is used by the Tax Business Analyst and contains all of the tables that you will need to consider for configuration of your installation. All the tables you see in this section have a single view for customer input.
- **System Enhancements:** Is used in customizing functions when or if you need to create additional advanced program enhancements to accommodate additional Integration logic that is not already part of the standard product.

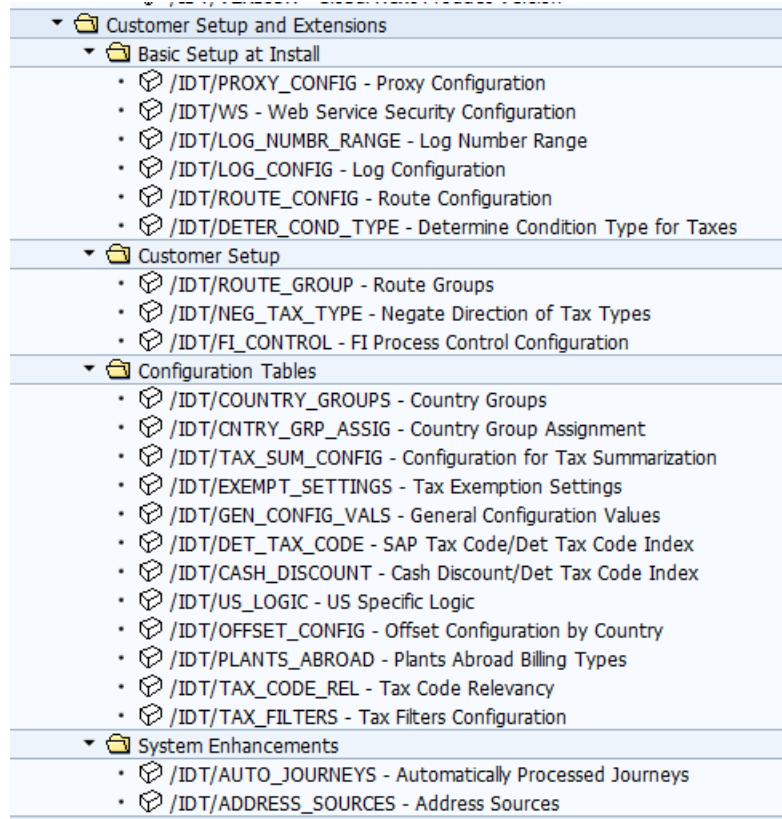

## Mappings

As of release 6.4.1.0 we have changed the menu to include this new section label as “Mappings”.

The Field mapping table has been upgraded to include dynamically generated internal code in order to dramatically improve processing speed and system performance. It has also been upgraded to an ALV grid type of user interface for ease of use. The Address mapping table has also undergone a change to the new UI with the ALV grid feature thus allowing both tables to consolidate under a single transaction code instead of the split for standard view and customer view. See sections below on use of the field mapping table and address mapping table that outlines this new approach.

## *Reports and Tools*

This menu is where we will establish the transaction codes for access to specific Log reports for tax transactions as well as any specialty reports and tools that are created by ONESOURCE Indirect Tax. Other reports or functions may be added to this menu in future releases of product updates.

## Table Configuration for Installation

The following three setups are dependent on prior installation of the Integration as outlined in the ONESOURCE Integration for SAP Installation and Programmers Guide.

### *ONESOURCE Proxy Configuration*

Transaction Code: **/N/IDT/PROXY\_CONFIG**


In the Proxy Configuration you will enable the interface to call Determination by configuring Integration to point to the proxy class, method, and port you created during the install process. A column for User Name has been added to this table so that a user could configure a proxy configuration specific to a given system user to do separate testing of a new proxy set up. The set-up of the proxy is discussed further in the Installation and Programmers Guide

A new column was added to this table as of Integration 6.4.4.0 and it is required to support the use of 2 possible WSDL and Proxy configurations if a user is using both an on-premise Determination in combination with the Cloud Determination 2018.3 version and above. Because new fields have been added to the WSDL in the Cloud version, separate WSDL and Proxy configuration are possible and would need to be configured here by country.

- **If you are only using the on-premise Determination, then you will not need to use the new column.**
- **If you are only using the Cloud Determination prior to 2018.3 you will also not need to use the new column.**
- **If you are using Cloud Determination 2018.3 and above, but you are NOT using any of the Oil and Gas new fields, then you will NOT need to use the new column.**
- **If you are using the Cloud Determination 2018.3 and above, AND you ARE using the new fields then you WILL have to use the new column.**

## WS Security Configuration

Transaction Code: **/N/IDT/WS**

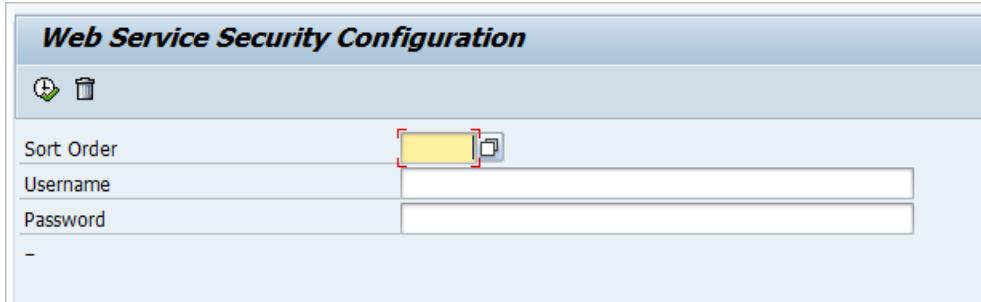

Web Service Security Configuration	
Sort Order	<input style="background-color: yellow; border: 1px solid red; width: 100px; height: 20px; vertical-align: middle;" type="text"/>
Username	<input style="width: 200px; height: 20px; vertical-align: middle;" type="text"/>
Password	<input style="width: 200px; height: 20px; vertical-align: middle;" type="text"/>
-	

A new transaction code: **/N/IDT/WS** has also been created for the user to establish the special username and password for each line on the Proxy Configuration table based on the sort order number of the proxy configuration line. This is an optional configuration that is only needed if the user has elected to utilize the newly provided BADI for proxy security setting. The data in the transaction is obfuscated in table **/IDT/D\_WS**. We recommend that you also review the Determination documentation on setting up the security on the Determination side as these two functions must work together. All configurations for this subject matter on the set up of proxy security using this optional table and new BADI for proxy security is discussed in the Installation and Programmers Guide.

## Log Number Range

Transaction Code: /N/IDT/LOG\_NUMBR\_RANGE

Display Number Range Intervals				
NR Object		Log counter		
Intervals				
No.	From number	To number	Current number	Ext
01	00000001	99999999	86622	<input type="checkbox"/>

The SOAP request and response can be logged in SAP in XML format. Each log is assigned a unique log number for management in the system and ease of sharing with other users when troubleshooting. You will need to confirm that you have a log number range established in this table to establish the number identifier for the log files as they are created for each document entered.

## Group Configuration

In this section we talk about the set-up of groups and how they can streamline your mapping and reduce duplication.

### Country Groups

Transaction Code: /N/IDT/COUNTRY\_GROUPS\_V

The Country Group table is the first of the tables that you will want to consider doing your own customized configuration of the system and allows you to streamline your other configurations by automatically replicating the same logic for a group of countries at the same time. This can be extremely helpful in the configuration of the region-specific rules where you want to maintain the same consistent table mapping of fields for a large list of possible countries, i.e. Europe, North America, Asia, etc. The use of country groups can dramatically reduce the amount of lines in your mapping and get rid of duplicity across like country set up.

The standard view of this table was set up because we are now sending as part of our setup for Brazil and India, configuration that is using the Country Group “BR” and “IN” in the standard mappings. Other country groups could be possibly configured here if needed to segregate country specific content in the future.

Transaction Code: **/N/IDT/COUNTRY\_GROUPS**

This view of the table is where you will add your own country group configuration to the table for use in other tables such as field mapping. Your table will be shipped blank when first installed for the first time. You will need to enter any group names you deem needed for your install.

Display View "Country Groups View": Overview	
	Cntry Grp
<input checked="" type="checkbox"/>	AR
<input type="checkbox"/>	CA
<input type="checkbox"/>	CN
<input type="checkbox"/>	EU
<input type="checkbox"/>	LATM
<input type="checkbox"/>	USA

## Country Group Assignment

Transaction Code: /N/IDT/CNTRY\_GRP\_ASSIG\_V

Display View "Country Group Assignment View": Overview				
  				
Country Group Assignment View				
S...	Pr...	Ctr	Cntry Grp	
<input checked="" type="checkbox"/>	GN	BR	BR	

Transaction Code: /N/IDT/CNTRY\_GRP\_ASSIG

After setting up the country group names in the prior table you are now ready to match a group of two-digit country codes to each of the country group names. In the example that we show here we have mapped several countries to the EU country group, and others their respective country groups. A country can only belong to one country group at a time. If you try to assign a country to more than one country group you will most likely encounter system errors as our program logic is not designed to handle multiple assignments at this time.



The country used for matching up to the country group during transaction processing is the Company Code country of that transaction.

Display View "Country Group Assignment View": Overview				
  				
Country Group Assignment View				
S...	Ctr	Cntry Grp		
<input type="checkbox"/>	AR	AR		 
<input type="checkbox"/>	CA	CA		
<input type="checkbox"/>	CL	LATM		
<input type="checkbox"/>	CN	CN		
<input type="checkbox"/>	DE	EU		
<input type="checkbox"/>	ES	EU		
<input type="checkbox"/>	FR	EU		
<input type="checkbox"/>	GB	EU		
<input type="checkbox"/>	IN	IN		
<input type="checkbox"/>	PR	USA		
<input type="checkbox"/>	PT	EU		
<input type="checkbox"/>	US	USA		



Note that the country BR (Brazil) is used in the standard view of this table and should not be assigned to another country group now, as it will cause program errors assigning to more than one group name.

## Route Groups

Transaction Code: /N/IDT/ROUTE\_GROUP\_V

Display View "Route Groups: Standard": Overview			
S...	Pr...	Route Name	Route Group
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	BILLING
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	BILLING
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	MM
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_SALES	SALES
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AP	FI
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AR	FI
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_A_GL	FI
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_DP	FI
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_FBS	FI
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_FI	FI
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_LIV	LIV
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_PUR	MM
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_SES	SES

We ship a set of preconfigured route groups to assist in the configurations, mainly in the standard field mappings. The above list of routes is logically grouped into route groups based on common business processes like creating sales order, sales billing, purchasing, LIV, and financial transactions. Additionally, customers can create their own route groupings.

Transaction Code: /N/IDT/ROUTE\_GROUP

Display View "Route Groups: Custom": Overview		
Route Groups: Custom		
S...	Route Name	Route Group
<input type="checkbox"/>	/IDT/ROUTE_GROUP_BILLING_GEN	SD
<input type="checkbox"/>	/IDT/ROUTE_GROUP_BILLING_PA	SD
<input type="checkbox"/>	/IDT/ROUTE_GROUP_SALES	SD

As a customer, you can create your own route groupings by adding route and naming a group. In the example above, we have grouped three routes into a logical group of SD.

## Base, Route, and Journey Configuration

### Base Mappings

Transaction Code: **/N/IDT/BASE\_MAPPING\_V**


Display View "Base Mappings: Standard": Overview									
Base Mappings: Standard									
S...	Pr...	Journey Name	Sort ...	Base Name	Loop Logic	Ancestor Base	Refinement Path	Row Determiner	Crte if No
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_GM_RESPONSE	10	DET_BATCH		RESPONSE_MESSAGE	PARAMETERS-OUTDATA		
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_GM_RESPONSE	20	DET_INVOICE		DET_BATCH	INVOICE	ROW=1	
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_GM_RESPONSE	30	DET_LINE	$\&I\&=LINE\_NUMBER$	DET_INVOICE	LINE		
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_GM_RESPONSE	40	DET_TAX	$\&J\&=ROW$	DET_LINE	TAX		
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_GM_RESPONSE	60	SAP_TAX_LINE		KOMV_INDEX_TAB			$KNUMV=\&I\&, ZAEHK=\&J\& X$
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_HEADER_REQUEST_GM	10	DET_BATCH		REQUEST_MESSAGE	PARAMETERS-INDATA		
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_HEADER_REQUEST_GM	20	DET_INVOICE		DET_BATCH	INVOICE	ROW=1	X
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_ITEM_REQUEST_GM	10	DET_BATCH		REQUEST_MESSAGE	PARAMETERS-INDATA		
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_ITEM_REQUEST_GM	20	DET_INVOICE		DET_BATCH	INVOICE	ROW=1	X
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_ITEM_REQUEST_GM	30	SAP_ITEM	$\&I\&=ROW$	SAP_ITEMS_TAB			
<input checked="" type="checkbox"/>	GM	/IDT/JOURNEY_ITEM_REQUEST_GM	40	DET_LINE		DET_INVOICE	LINE	$ID=\&I\&$	X
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	10	SAP_HEADER		SAP_AUDIT_DATA	HEADER		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	20	SAP_ITEMS_TAB		SAP_AUDIT_DATA	ITEMS		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	30	SAP_ITEM	$\&I\&=VBRP-POSNR$	SAP_ITEMS_TAB			
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	40	DET_LINE		DET_INVOICE	LINE	$LINE\_NUMBER=\&I\&$	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	10	SAP_HEADER		SAP_AUDIT_DATA	HEADER		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	20	SAP_ITEMS_TAB		SAP_AUDIT_DATA	ITEMS		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	30	SAP_ITEM	$\&I\&=BSEG-BUZEI$	SAP_ITEMS_TAB			
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	40	DET_LINE		DET_INVOICE	LINE	$LINE\_NUMBER=\&I\&$	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_CHECK_AUDIT_MESS	10	SAP_HEADER		SAP_AUDIT_DATA	HEADER		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_DEF_SPECIAL_LOGIC	10	DET_BATCH		REQUEST_MESSAGE	PARAMETERS-INDATA		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_DEF_SPECIAL_LOGIC	20	DET_INVOICE		DET_BATCH	INVOICE	ROW=1	X
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_DEF_SPECIAL_LOGIC	30	DET_LINE		DET_INVOICE	LINE	$ID=\&I\&$	X
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FB05_COMPANY_ROLE	10	DET_BATCH		REQUEST_MESSAGE	PARAMETERS-INDATA		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FB05_COMPANY_ROLE	20	DET_INVOICE		DET_BATCH	INVOICE	ROW=1	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FB05_RESPONSE	10	DET_BATCH		RESPONSE_MESSAGE	PARAMETERS-OUTDATA		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FB05_RESPONSE	20	DET_INVOICE		DET_BATCH	INVOICE	ROW=1	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FB05_RESPONSE	30	DET_LINE	$\&I\&=LINE\_NUMBER$	DET_INVOICE	LINE		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FB05_RESPONSE	40	DET_TAX	$\&J\&=ROW$	DET_LINE	TAX		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FB05_RESPONSE	60	SAP_TAX_LINE		KOMV_INDEX_TAB			$KPOSN=\&I\&, ZAEHK=\&J\& X$
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQUEST	10	DET_BATCH		REQUEST_MESSAGE	PARAMETERS-INDATA		
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQUEST	20	DET_INVOICE		DET_BATCH	INVOICE	ROW=1	X
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQ_BR_GM	10	DET_BATCH		REQUEST_MESSAGE	PARAMETERS-INDATA		

The Base object makes possible the use of configurable field mappings. It is a way to dynamically represent relationships between different levels of the XML structure and how they relate to each other. This allows a configuration driven code, rather than hard coding structure relationships. It also allows Thomson Reuters make changes in the interface easier. This table is view only and not modifiable by the customer. You can see in the view above that there are base mappings listed here for the Global Next product but also several at the top for the Goods Movement (GM) product. If you do not have the GM product installed in your system you will likely not see the GM line mappings as they are now only added when you transport in the Goods Movement product to overlay over the standard Global Next table structures. The Base mapping table has been moved as of release 6.4.1.0 to the new Mappings menu along with the new field mapping table and address mapping table transactions.

## Select Route for SD and Purchasing

Transaction Code: /N/IDT/SELECT\_ROUTE\_V

**Display View "Select route for SD and purchasing configuration view":**

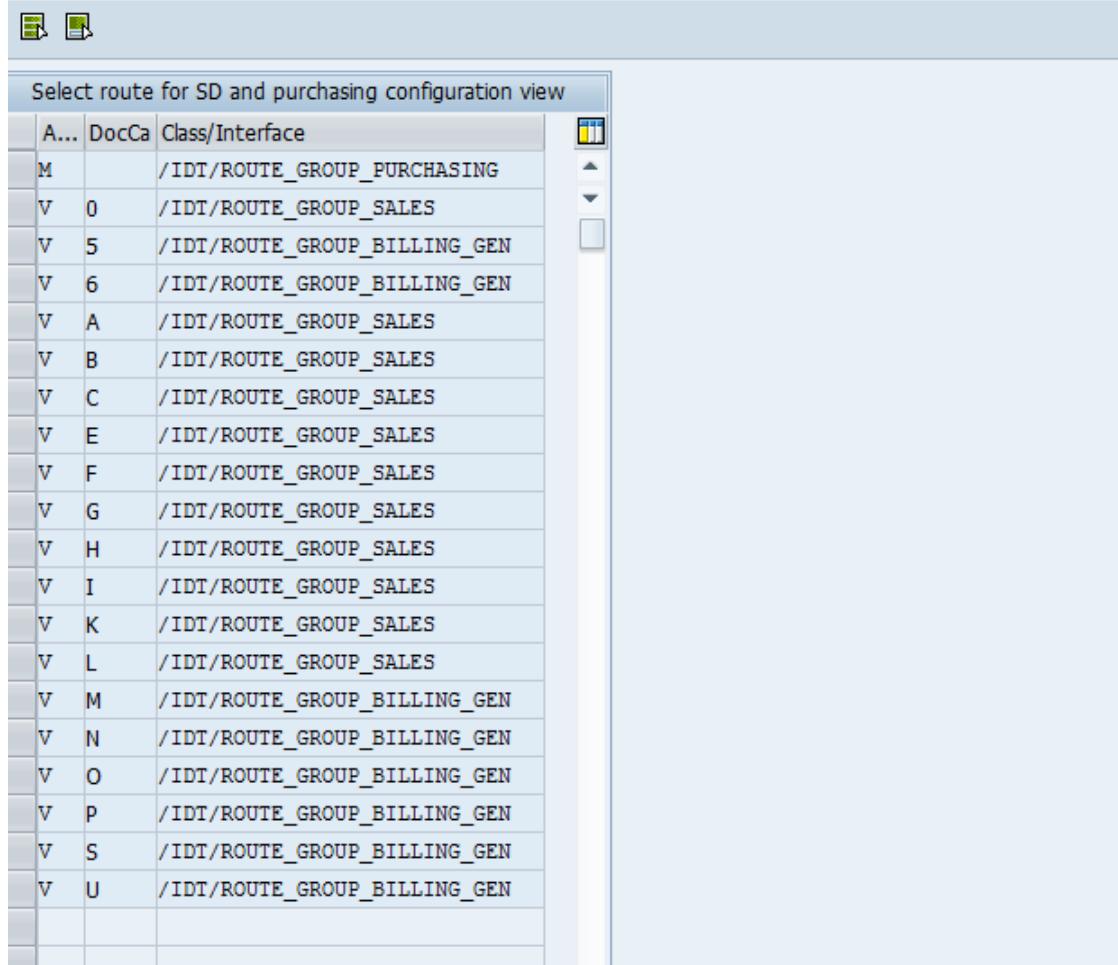

The screenshot shows a SAP Fiori application window. At the top, there is a header bar with the title "Select route for SD and purchasing configuration view". Below the header is a toolbar with two icons: a green square with a white arrow pointing right and a green square with a white document icon. The main area is a table with the following data:

A...	DocCa	Class/Interface
M		/IDT/ROUTE_GROUP_PURCHASING
V 0		/IDT/ROUTE_GROUP_SALES
V 5		/IDT/ROUTE_GROUP_BILLING_GEN
V 6		/IDT/ROUTE_GROUP_BILLING_GEN
V A		/IDT/ROUTE_GROUP_SALES
V B		/IDT/ROUTE_GROUP_SALES
V C		/IDT/ROUTE_GROUP_SALES
V E		/IDT/ROUTE_GROUP_SALES
V F		/IDT/ROUTE_GROUP_SALES
V G		/IDT/ROUTE_GROUP_SALES
V H		/IDT/ROUTE_GROUP_SALES
V I		/IDT/ROUTE_GROUP_SALES
V K		/IDT/ROUTE_GROUP_SALES
V L		/IDT/ROUTE_GROUP_SALES
V M		/IDT/ROUTE_GROUP_BILLING_GEN
V N		/IDT/ROUTE_GROUP_BILLING_GEN
V O		/IDT/ROUTE_GROUP_BILLING_GEN
V P		/IDT/ROUTE_GROUP_BILLING_GEN
V S		/IDT/ROUTE_GROUP_BILLING_GEN
V U		/IDT/ROUTE_GROUP_BILLING_GEN

This table controls which route is responsible for what process in SAP by mapping the route to the document category within Sales/Distribution (application V in first column) and Purchasing (application M). This table is view only and not modifiable by the customer.

## ONESOURCE Route Configuration

Transaction Code: **/N/IDT/ROUTE\_CONFIG**

Display View "Configuration to Switch on Routes": Overview								
Route Name	Sort ...	A...	C...	C...	A...	A...	A...	A...
/IDT/ROUTE_GROUP_BILLING_GEN	100001	<input checked="" type="checkbox"/>	*	*	V	994	0	
/IDT/ROUTE_GROUP_BILLING_PA	100001	<input checked="" type="checkbox"/>	*	*	V	994	0	
/IDT/ROUTE_GROUP_DELIVERY	100001	<input checked="" type="checkbox"/>	*	*	V	994	0	
/IDT/ROUTE_GROUP_PURCHASING	100001	<input checked="" type="checkbox"/>	*	*	M	994	0	
/IDT/ROUTE_GROUP_SALES	100001	<input checked="" type="checkbox"/>	*	*	V	994	0	
/IDT/ROUTE_NON_GROUP_DOC_AP	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_AR	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_A_GL	100001	<input checked="" type="checkbox"/>	*	*	TX	0	0	
/IDT/ROUTE_NON_GROUP_DOC_DNF	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_DP	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_DT	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_FB5	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_FI	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_GM	100001	<input checked="" type="checkbox"/>	*	*	TX	0	0	
/IDT/ROUTE_NON_GROUP_DOC_GM_BR	100001	<input checked="" type="checkbox"/>	BR	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_LIV	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_PUR	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_NON_GROUP_DOC_SES	100001	<input checked="" type="checkbox"/>	*	*	TX	991	994	
/IDT/ROUTE_UPDATE_AUDIT_DB	100001	<input checked="" type="checkbox"/>	*	*	0	0	0	

As of the transports for the 6.3.0.0 release this table will be shipped blank and you will need to enter all the fields as shown in the screenshot above.

This table is used to turn on or off the various routes in the system and tie the route to the required **Condition Formula** (AltCty) and **Condition Base Value** (AltCBV) that is referenced in the pricing/tax procedure. You will need to maintain the condition formula values based on the formulas created in the **Install and Programmers Guide** -> "Creating Condition Value Formulas" before executing any transactions in SAP.

Additionally, this table can be used to control whether the Integration is to be used for a given module of SAP by country group or company code assignment. In above example we have assumed Integration is used in all countries and all business processes. However, configure this as your business might require, for example native SAP tax calculation for AP and LIV/Purchasing but use ONESOURCE Integration for SAP in SD and AR/Billing areas. More specifically you may wish to:

- Maintain some company codes to use Integration 6.x only for Sales transaction and not for Purchasing and Accounts Payable.

- Maintain some company codes set to use an older version of Integration for some company codes and the New Integration 6.x for others.
- Use native SAP calculations for some modules and Integration 6.x for others.
- Manage their conversion of company codes gradually to the new version over time.



Customers upgrading to 6.3 or later releases from previous version (< 6.3) of Global Next, delete the existing entries and re-create. You can use the table below as a guide to copy and paste to your configuration for either new customer or update as needed. Modify AltCTy as needed.

ROUTE NAME	SORT ORDER	ACTIVE	COUNTRY GROUP	COCD	APP	ALTCTY	ALTCBV
/IDT/ROUTE_GROUP_BILLING_GEN	100001		*	*	V	994	0
/IDT/ROUTE_GROUP_BILLING_PA	100001		*	*	V	994	0
/IDT/ROUTE_GROUP_DELIVERY	100001		*	*	V	994	0
/IDT/ROUTE_GROUP_PURCHASING	100001		*	*	M	994	0
/IDT/ROUTE_GROUP_SALES	100001		*	*	V	994	0
/IDT/ROUTE_NON_GROUP_DOC_AP	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_AR	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_A_GL	100001		*	*	TX	0	0
/IDT/ROUTE_NON_GROUP_DOC_DNF	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_DP	100001		*	*	TX	991	994

/IDT/ROUTE_NON_GROUP_DOC_DT	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_FB5	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_FI	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_GM	100001		*	*	TX	0	0
/IDT/ROUTE_NON_GROUP_DOC_GM_BR	100001		BR	*	TX	0	0
/IDT/ROUTE_NON_GROUP_DOC_LIV	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_PUR	100001		*	*	TX	991	994
/IDT/ROUTE_NON_GROUP_DOC_SES	100001		*	*	TX	991	994
/IDT/ROUTE_UPDATE_AUDIT_DB	100001		*	*		0	0
/IDT/ROUTE_NON_GROUP_DOC_DT_RC	100001		*	*	TX	991	994

## *Automatically Processed Journeys*

The Auto processed Journey view ties journeys to routes for processing. A route can be made up of multiple journeys. The table controls which processes are active in what country groups and company codes.

Transaction Code: **/N/IDT/AUTO\_JOURNEYS\_V**

Display View "Auto Processed Journeys for Route: Standard": Overview										
S...	Pr...	Route Name	Journey Name	Req/Resp	Sort ...	A...	C...	CoCd		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	/IDT/JOURNEY_AUDIT_SAVE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	/IDT/JOURNEY_BRAZIL_SD_ADJUST	Response ▼	10	<input checked="" type="checkbox"/>	BR	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	/IDT/JOURNEY_FREIGHT	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	/IDT/JOURNEY_STANDARD_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	/IDT/JOURNEY_TAX_TAB_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	/IDT/JOURNEY_AUDIT_SAVE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	/IDT/JOURNEY_FREIGHT	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	/IDT/JOURNEY_PLANTS_ABROAD	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	/IDT/JOURNEY_PLANTS_ABROAD	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	/IDT/JOURNEY_STANDARD_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	/IDT/JOURNEY_TAX_TAB_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_DELIVERY	/IDT/JOURNEY_STANDARD_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	BR	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_DELIVERY	/IDT/JOURNEY_TAX_TAB_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	BR	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_FREIGHT	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_MULTI_ACC_ASSIGN	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_MULTI_ACC_ASSIGN	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_STANDARD_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_TAX_TAB_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_US_SPECIAL_LOGIC2	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_US_SPECIAL_LOGIC2	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_SALES	/IDT/JOURNEY_BRAZIL_SD_ADJUST	Response ▼	10	<input checked="" type="checkbox"/>	BR	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_SALES	/IDT/JOURNEY_FREIGHT	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_SALES	/IDT/JOURNEY_FREIGHT	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_SALES	/IDT/JOURNEY_STANDARD_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_SALES	/IDT/JOURNEY_TAX_TAB_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_AUDIT_SAVE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_AUDIT_SAVE_TAX_UP	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_STANDARD_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_TAX_TAB_RESPONSE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_US_SPECIAL_LOGIC2	Request ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_US_SPECIAL_LOGIC2	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AR	/IDT/JOURNEY_AUDIT_SAVE	Response ▼	10	<input checked="" type="checkbox"/>	*	*		
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_NON_GROUP_DOC_AR	/IDT/JOURNEY_AUDIT_SAVE_TAX_UP	Response ▼	10	<input checked="" type="checkbox"/>	*	*		

Transaction Code: /N/IDT/AUTO\_JOURNEYS

Change View "Auto Processed Journeys for Route: Custom": Overview							
 New Entries     							
Auto Processed Journeys for Route: Custom							
S...	Route Name	Journey Name	Req/Resp	Sort ...	A...	C...	CoCd
<input type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_SELF_ASSESSMENT	2 Respo... ▾	100001	<input checked="" type="checkbox"/>	*	4000

You can override our standard delivered mappings in this custom view. .

## Other Configuration Tables

This is a list of various tables used for setup of your system.

### Determine Condition Type for Taxes

Transaction Code: **/N/IDT/DETER\_COND\_TYPE**

Display View "Determine condition types for taxes": Overview									
Sort ...	Route Name	C...	CoCd	NatureOfTx	ERP	Tax Cd	Authority ...	CTyp	Description
	100010 /IDT/ROUTE_GROUP_BILLING_GEN	*	*	Fee	▼	*	*	ZITF	
	100020 /IDT/ROUTE_GROUP_BILLING_PA	*	*	Fee	▼	*	*	ZITF	
	100030 /IDT/ROUTE_GROUP_PURCHASING	*	*	Fee	▼	*	*	ZITF	
	100040 /IDT/ROUTE_GROUP_SALES	*	*	Fee	▼	*	*	ZITF	
	100045 /IDT/ROUTE_GROUP_DELIVERY	*	*	Fee	▼	*	*	ZITF	
	100050 /IDT/ROUTE_NON_GROUP_DOC_AP	*	*	Fee	▼	*	*	ZITF	
	100060 /IDT/ROUTE_NON_GROUP_DOC_AR	*	*	Fee	▼	*	*	ZITF	
	100070 /IDT/ROUTE_NON_GROUP_DOC_FI	*	*	Fee	▼	*	*	ZITF	
	100076 /IDT/ROUTE_NON_GROUP_DOC_SES	*	*	Fee	▼	*	*	ZITF	
	100077 /IDT/ROUTE_NON_GROUP_DOC_DT	*	*	Fee	▼	*	*	ZITF	
	100078 /IDT/ROUTE_NON_GROUP_DOC_DP	*	*	Fee	▼	*	*	ZITF	
	100079 /IDT/ROUTE_NON_GROUP_DOC_FB5	*	*	Fee	▼	*	*	ZITF	
	100080 /IDT/ROUTE_NON_GROUP_DOC_LIV	*	*	Fee	▼	*	*	ZITF	
	100082 /IDT/ROUTE_UPDATE_AUDIT_DB	*	*	Fee	▼	*	*	ZITF	
	100084 /IDT/ROUTE_NON_GROUP_DOC_A_GL	*	*	Fee	▼	*	*	ZITF	
	100085 /IDT/ROUTE_NON_GROUP_DOC_GM	*	*	Fee	▼	*	*	ZITF	
	100090 /IDT/ROUTE_GROUP_BILLING_GEN	*	*	Percentage	▼	*	*	ZITR	
	100100 /IDT/ROUTE_GROUP_BILLING_PA	*	*	Percentage	▼	*	*	ZITR	
	100110 /IDT/ROUTE_GROUP_PURCHASING	*	*	Percentage	▼	*	*	ZITR	
	100120 /IDT/ROUTE_GROUP_SALES	*	*	Percentage	▼	*	*	ZITR	
	100125 /IDT/ROUTE_GROUP_DELIVERY	*	*	Percentage	▼	*	*	ZITR	
	100130 /IDT/ROUTE_NON_GROUP_DOC_AP	*	*	Percentage	▼	*	*	ZITR	
	100140 /IDT/ROUTE_NON_GROUP_DOC_AR	*	*	Percentage	▼	*	*	ZITR	
	100150 /IDT/ROUTE_NON_GROUP_DOC_FI	*	*	Percentage	▼	*	*	ZITR	
	100156 /IDT/ROUTE_NON_GROUP_DOC_SES	*	*	Percentage	▼	*	*	ZITR	
	100157 /IDT/ROUTE_NON_GROUP_DOC_DT	*	*	Percentage	▼	*	*	ZITR	
	100158 /IDT/ROUTE_NON_GROUP_DOC_DP	*	*	Percentage	▼	*	*	ZITR	
	100159 /IDT/ROUTE_NON_GROUP_DOC_FB5	*	*	Percentage	▼	*	*	ZITR	
	100160 /IDT/ROUTE_NON_GROUP_DOC_LIV	*	*	Percentage	▼	*	*	ZITR	
	100162 /IDT/ROUTE_UPDATE_AUDIT_DB	*	*	Percentage	▼	*	*	ZITR	
	100164 /IDT/ROUTE_NON_GROUP_DOC_A_GL	*	*	Percentage	▼	*	*	ZITR	
	100165 /IDT/ROUTE_NON_GROUP_DOC_GM	*	*	Percentage	▼	*	*	ZITR	
	100170 /IDT/ROUTE_GROUP_BILLING_GEN	*	*	Exempt	▼	*	*	ZITR	

- 100180 /IDT/ROUTE\_GROUP\_BILLING\_PA
- 100190 /IDT/ROUTE\_GROUP\_PURCHASING
- 100200 /IDT/ROUTE\_GROUP\_SALES
- 100205 /IDT/ROUTE\_GROUP\_DELIVERY
- 100210 /IDT/ROUTE\_NON\_GROUP\_DOC\_AP
- 100220 /IDT/ROUTE\_NON\_GROUP\_DOC\_AR
- 100230 /IDT/ROUTE\_NON\_GROUP\_DOC\_FI
- 100236 /IDT/ROUTE\_NON\_GROUP\_DOC\_SES
- 100237 /IDT/ROUTE\_NON\_GROUP\_DOC\_DT
- 100238 /IDT/ROUTE\_NON\_GROUP\_DOC\_DP
- 100239 /IDT/ROUTE\_NON\_GROUP\_DOC\_FB5
- 100240 /IDT/ROUTE\_NON\_GROUP\_DOC\_LIV
- 100242 /IDT/ROUTE\_UPDATE\_AUDIT\_DB
- 100244 /IDT/ROUTE\_NON\_GROUP\_DOC\_A\_GL
- 100245 /IDT/ROUTE\_NON\_GROUP\_DOC\_GM

It's required that you use the table as shown above and make sure that initially you have it configured as shown. This would be the standard and usual configuration for this table. This table was preconfigured as part of the installation transports, but without the **Condition Type** (CTyp) field populated. As of release 6.3.0.0 we have elected to not populate this table as many of our upgrade customers have additional configuration that they have added to this table that our transport was clearing. You will need to input these route names and condition type values as part of the initial system setup before executing any transactions in SAP. You will use the condition types that were setup in *Configuration Guide for SAP Tables*. Your condition type column should look like our example above if you elected to use the same ZITR, ZITE, ZITD, ZITF conditions as noted in the guide. However, if these condition type names were already taken in your system prior to your install, yours may be different. The condition types maintained here will drive what condition is used when displaying tax results in the transaction.

Customers upgrading to 6.3 from previous version of Global Next, delete the existing entries and re-create. You can use the table on the next page as a guide to copy and paste to your configuration for either new customer or update as needed.

## New Authority Type Column

As of release 6.3.0.0 a new column was also added to the table to tie the condition type to a specific tax authority in SAP. This was due to logic needed to support the use of multiple condition types being returned to SAP for direct linkage to tax authorities used for complex scenarios for Brazil. With the new Brazil logic now applicable with this release, the mapping is critical for being able to drive needed results to the various Nota Fiscal forms. For a non-Brazil implementation, you will not need to utilize this new column and your table would need to be populated like the example shown above with an “\*” in this new field. Please refer to our new “**Brazil Enablement**” chapter in the *Configuration Guide for Special Functions* for further information as to how to add records to this table that are specific to Brazil condition types and tax authorities.

The condition types mapped should match the Nature of Tax meaning from Determination:

Percentage: Condition with a condition category of “A” for Percentage (ZITR in our sample)

Fee: Condition with a condition category of “B” for Fixed amount (ZITF in our sample)

Exempt: This would match best with a percentage-based condition (ZITR)

In some complex situations or based on some countries tax law, a specific condition type might need to be used to drive reporting, printing, or legal processes. For these cases the ERP\_Tax\_Code field is optionally available in this table. You would be able to setup a Tax Code Qualifier that is tied to a ERP\_Tax\_Code uniquely identifying that scenario. Based on that result you could then map to a special condition type. This condition type should be setup like ZITR or ZITF using the same template as outlined in the SAP configuration section.

ROUTE NAME	CNTRY GRP	COCD	NATUREOFTX	ERP TAX CD	AUTHORITY	CTYP
/IDT/ROUTE_GROUP_BILLING_GEN	*	*	Fee	*	*	ZITF
/IDT/ROUTE_GROUP_BILLING_PA	*	*	Fee	*	*	ZITF
/IDT/ROUTE_GROUP_PURCHASING	*	*	Fee	*	*	ZITF
/IDT/ROUTE_GROUP_SALES	*	*	Fee	*	*	ZITF
/IDT/ROUTE_GROUP_DELIVERY	*	*	Fee	*	*	ZITF

/IDT/ROUTE_NON_GROUP_DOC_AP	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_AR	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_FI	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_SES	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_DT	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_DP	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_FB5	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_LIV	*	*	Fee	*	*	ZITF
/IDT/ROUTE_UPDATE_AUDIT_DB	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_A_GL	*	*	Fee	*	*	ZITF
/IDT/ROUTE_NON_GROUP_DOC_GM	*	*	Fee	*	*	ZITF
/IDT/ROUTE_GROUP_BILLING_GEN	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_GROUP_BILLING_PA	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_GROUP_PURCHASING	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_GROUP_SALES	*	*	Percentage	*	*	ZITR

/IDT/ROUTE_GROUP_DELIVERY	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_AP	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_AR	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_FI	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_SES	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_DT	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_DP	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_FB5	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_LIV	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_UPDATE_AUDIT_DB	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_A_GL	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_GM	*	*	Percentage	*	*	ZITR
/IDT/ROUTE_GROUP_BILLING_GEN	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_GROUP_BILLING_PA	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_GROUP_PURCHASING	*	*	Exempt	*	*	ZITR

/IDT/ROUTE_GROUP_SALES	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_GROUP_DELIVERY	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_AP	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_AR	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_FI	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_SES	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_DT	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_DP	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_FB5	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_LIV	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_UPDATE_AUDIT_DB	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_A_GL	*	*	Exempt	*	*	ZITR
/IDT/ROUTE_NON_GROUP_DOC_GM	*	*	Exempt	*	*	ZITR



Once you populate this table with a new installation you will have to check it with every new release update to the product that you apply to make sure that any new routes get added if new routes are established within the release being applied.

Example: in 6.6.0.0 release two new routes were added for Settlement Management:

/IDT/ROUTE\_GROUP\_BILLING\_SM\_SD

/IDT/ROUTE\_GROUP\_BILLING\_SM\_MM

And one new route for Deferred tax Reverse charge scenario

/IDT/ROUTE\_NON\_GROUP\_DOC\_DT\_RC

Three lines for each new route would have to be added: one for fee, percentage, and exempt statuses for Nature of Tax along with the correct condition type.

## *Tax Exemption Settings*

Transaction Code: **/N/IDT/EXEMPT\_SETTINGS**

In standard SAP taxing scenarios, the customer (TSKD-TAXKD) and material (TSKM-TAXKM) tax indicators would be used in condition records to drive taxability via a tax code. With Integration for SAP's use of a driver and results tax code, a custom table had to be created to manage the same concept. We still use the data in the master records. The customer master tax indicator with potential values of taxable (1), not taxable (0), or force a tax calculation (2), and others. The same is true for material master tax indicator. A force code is not applicable for the material as Determination will override this for the materials.

You will need to maintain this table as part of the initial system setup before executing any transaction in SAP. This is one of 3 tables that need to be maintained immediately after transport of the system.

The combination of these indicators drives taxability in Determination via the XML field **IS\_EXEMPT**. This field can have three different values:

**Blank** Determination decides if the transaction is taxable or not based on current Determination rules configured.

**Always tax-exempt** Force an exemption and override what Determination would decide.

**Always taxable** Force a tax calculation and override what Determination would decide.

Best practice is to set all your customers and materials to be taxable and let Determination control the taxability and therefore the return of correct taxing and exemption information for correct invoice printing, reporting, and compliance functions.

## *SAP Tax Code/DET Tax Code Index*

Transaction Code: **/N/IDT/DET\_TAX\_CODE**

This table is shipped empty. There are two main functions that this configuration can provide:

1. Map tax codes that are designated as exempt override codes using the **IS\_EXEMPT XML** field.
2. Maps override tax codes utilizing the **TAX\_CODE XML** field.

The benefit of using designated override tax codes is that they can be easily identified and reported on. You might want to review at month end closing which transactions were overridden and why, if the taxing decision made was the correct one, or if an adjustment is required. The use of override tax codes could also indicate a need to revisit tax policy setup, configurations, and processes as they indicate an opportunity for better tax automation.

## Exempt Status Override

There may be situations where a user may need to override a tax calculation as being totally exempt from tax above what Determination would calculate based on the tax indicators on the customer, material, or exemption certificate processing in Determination. If this is the case then a tax code would need to be established and act as a driver tax code that would drive the transaction to an exempt status without the use of a Determination tax rule. It is exempt based on the tax code. In this situation the system will bring back a response from Determination that will have a tax block that is designated as **IS\_EXEMPT = true** in the XML response and would not show that a tax rule was accessed in Determination.

In our example we have established A0 as an output tax exempt code and V0 as an input tax exempt tax code by designating them in the “Is Exempt?” column as TRUE. These two codes could then be used in place of the O1 or I1 driver tax codes on a specific transaction and would tell Determination to ignore the normal logic and consider the line exempt for all taxes on that line.

## Tax Rate or Treatment Override

There may be situations where business requires overriding a tax code to something other than what is returned based on the tax policy maintained in Determination. For example, in a finance transaction (i.e. FB60) not enough details are available to match a vendor invoice to the tax charged by the supplier. However, it is assumed that the invoice was correctly coded when issued, so the user needs to be able to override the taxing decision made by Determination

This can be achieved in providing a value in the XML **TAX\_CODE** field that either matches an already established “9000” rule in Determination or custom rule.

Sometimes there is not an established 9000 rule that has the correct tax code that is needed for your mapping. If that is the case, then you will have to have a custom rule created. For example, if the 9000 rule for STANDARD does not exist, and you have a line mapping in your table for the override of Y1 for STANDARD, (see above) then create a custom rule with this Determination tax code of STANDARD. There must be a one to one maintenance and match between the entry in your Determination tax code table configuration as noted above and the tax code rules in Determination.

To have a specific **SAP tax code** use the 9970 rule for a reduced tax calculation, that tax code would be mapped in our configuration table in **Determination Tax Code** to a value of REDUCED. In our screenshot shown above, this is the case for Y2 and Z2, both would use rule 9970.

### *US Specific Logic Table*

Transaction Code: **/N/IDT/US\_LOGIC**

This table is used for specific logic used for US and US territory Sales and Consumer Use tax self-pay accruals. This table ties the tax codes used for US Sales and Use tax to the correct Company Role and Tax category fields as well as telling the program that an offsetting account entry is needed to balance the Consumer Use Tax self-accrual.

To configure this table, you will need to identify:

1. Relevant company codes that are in the US or US territory and are configured for Sales and Use tax. You will also need to identify what customers in specific countries are shipping into the US that are calculating and charging US sales tax. They will be needed to configure the ship-from country and country group columns on the left side of the table.
2. Identify all the tax codes used for Sales and Use tax on each company code per step 1.
3. All tax codes used for Sales tax should be designated as using the **Seller** Company role.
4. All tax codes used for Consumer Use tax should be designated as using **Buyer** Company role.
5. All Consumer Use tax codes should also have the check box checked to create the offsetting entry to expense the use tax to account key NVV (another account key can be selected but must be created with like configuration to the standard SAP account key NVV if desired).

This table is normally shipped as blank and only has a customer view for customer input. To use the I1 and U1 tax codes for the US company codes you will need to configure this table like our example that we show here. In our example we used “\*” for the ship from country group and ship from country columns. You may elect to use this wild card assignment or can specifically list different countries based on your accounting policy and tax code and account key assignments.

The seller role is used on transaction for vendor charged US sales tax so that the calculation is done correctly and uses sales tax rates from Determination content. The buyer role is used when the transaction is supposed to be self-accrued based on Use Tax rates in Determination content. Use tax rates can quite often be lower than sales tax rates as some lower level jurisdiction are not involved in the scenario for use tax. Use tax calculation using the buyer role will only produce a single tax block to calculate the tax liability and the entry requires an offsetting posting to be created within Integration in order to balance the self-accrual entry and post the debit to the expense account using account key NVV. This is accomplished through the proper mapping of this table for the driver and all downstream tax codes.

It is important that you not try to mix a driver tax code that is set to seller role with a final tax code that is used for buyer role use tax accrual or errors will occur within the transaction. This is why we tell you to create both a I1 driver tax code and a U1 driver tax code and use them as needed to drive the transaction to the correct buyer/seller role and proper calculation. Transaction entry personnel need to be instructed as to which code to use based on the needs of the transaction. All final tax codes that are used in TCQ logic must also be configured in this table. They are required for proper calculation of tax at all points in the transaction process.

## *Cash Discount/DET Tax Code Index*

Transaction Code: **/N/IDT/CASH\_DISCOUNT**

This table has been created to support functionality for countries that require a tax calculation adjustment on cash discounts taken at time of payment. (See Appendix 1 section on “Cash Discounts Taken/Received at Payment for country configuration requirements) For purposes of demonstration we will use configuration for Germany as an example. The table is used to map the original tax code from the cash discount document line to a determination tax code to be able to drive the TCQ correctly for cash discounts adjustments. See sample view of the table below:



The table will be shipped empty upon your installation of the Integration and the user must configure for each country configured for cash discount at time of payment. To configure this table the following steps should be addressed:

1. Identify all tax codes that you have established for the related country required in the table and enter a line for the country and the tax code.
2. Identify and input the applicable Determination LINE.TAX\_CODE that matches the SAP tax code function. For example, for an A1 standard rated output tax the Determination tax code would be "STANDARD".



Customers would also need to make sure that they have either a custom rule or a 9000-rule established for each of the SAP tax code to Determination tax codes mappings in the list. There are 9000 rules established for some of the required tax type but some custom rules will likely be required in Determination to round out the list from what is missing in standard content.

Logic for use of this table:

If the line-item tax code on the invoice being adjusted for cash discount matches an entry in this table, then

- a. Pass the country of the company code and the Determination tax code from the line in this table to the request for Determination to calculate the correct tax on the adjustment based on the custom rule logic set up in determination.
- b. Populate attribute 46 at the line level in the request to Determination with a 2-digit code of the two-digit SAP tax code from the table. Example: tax code is A1 and attribute 46 request would be populated with "A1".

## Population of Line Level Attribute46 Within the Request to Determination

This two-digit logic would be required so that the TCQ could establish the correct tax code between an A1 and an Y1 tax code. Without the extra designation using this attribute there would be no difference between a Determination tax code of "standard" representing a request for an A1 code from a driver tax code on the original invoice line of Y1.

Additional tax code qualifiers would need to be set up for this cash discounts mapping that utilize the standards TCQ and add the attribute 46 to the conditions on the TCQ. See further explanation of this in the section on tax code qualifiers.

## General Configuration Values

Transaction Code: **/N/IDT/GEN\_CONFIG\_VALS**

This table is provided to map a variety of general settings for Integration. This table is provided empty, the picture above is for illustration and explanation purposes filled with sample data (yours might be different).

## Freight

To allow Determination to assess taxes on the portion of a price associated with freight we need to send freight specific information. This is done by creating a related line to the product line for freight in the request XML. If the requirements for freight are fulfilled based on this table configuration then the following logic applies:

### **Request:**

- Create a freight line in the XML request by copying the existing product line to a freight line
- Sets the related line number on the freight line to the non-freight line's line number
- Sets the description on the freight line to "Freight for line <original line number>"
- Sets the freight line's line number to the non-freight line's number plus one million (this way we can tell which lines coming back from Determination are freight)
- Sets the product code to the freight product code configured

### **Response:**

Determination is returning the freight line as a related line to the non-freight line. Both are then returned as separate lines. The authority names for freight authorities can be prepended based on configuration. Each taxing authority is returned uniquely; if there are 4 taxing authorities involved there could be 8 lines in total; 4 for product and 4 for freight.

When there is Freight in a transaction, the Line ID for the freight line that is following the product line should be '2' as it is a unique key in audit database. The line number should be prepended with '1'.

If the line number of the product line or Line ID 1 is 000010, then the Freight line number should be 1000010 and line ID is '2'.

CONFIGURATION OPTION	DESCRIPTION
Freight product code	A product code used in Determination to drive taxability for freight. This code will be sent in the PRODUCT_CODE field of the XML request in the freight line.
Freight condition sub-total	The sub-total field configured in the pricing procedure indicating the freight price values.
Freight condition text prepend	A prepend text to indicate freight in the condition screen, for example F: It is recommended to keep this short since the display field in SAP is 20 characters long.



## External Company ID Prepend

When transaction data is passed to Determination the EXTERNAL\_COMPANY\_ID XML element determines which company's rules, rates, and other processing logic are applied. The standard source of the EXTERNAL\_COMPANY\_ID is the SAP Company Code to which the transacting business process belongs to. In instance where one Determination is covering multiple installations of SAP where you might have the same company code numbers in multiple systems this would lead to inconsistencies. To prevent the mix up of data when this occurs, the system would need to uniquely identify each company code. The prepend option enables this as you can add a value to each systems company code.

Change View "General configuration values maintenance view": Overview								
      								
General configuration values maintenance view								
Option	Sort ...	A...	R...	G...	C...	C...	General configuration option value	
Freight product code	▼ 10	<input checked="" type="checkbox"/>	*	*	*	*	FREIGHT	
Freight condition sub-total...	▼ 10	<input checked="" type="checkbox"/>	*	*	*	*	KZWI4	
Freight conditon text prepe...	▼ 10	<input checked="" type="checkbox"/>	*	*	*	*	F:	
External company Id prepend	▼ 10	<input type="checkbox"/>	*	*	*	*	<b>MYSAMPLE_</b>	

For example the value **MYSAMPLE\_** would be prepended to any transaction from this system. So, in the case of a transaction for company code 3000 the value send to Determination would be **MYSAMPLE\_3000**.

It is required that the External Company ID in Determination is configured to match the field value of the prepended company code if using this feature.

## Override Addresses

The four override address options on the General Configuration table are used to establish the name of the new IDT address fields that can be added to the MIRO invoice entry line-item detail. Here you would identify the name of the field that you added in the other setup and configuration this optional MIRO feature. If you wish to have the ability to change the ship to address at time of MIRO invoice entry then this would be required configuration to tell the system the new field name within the program.

## IDT Account Key Assignment

The IDT Account Key Assignment option in this table is used to set up a default account key of IDT for certain program uses. Currently this is used if you wish to set up certain tax codes as not being relevant to tax and not make a call to Determination. This is noted in the configuration instructions for the Tax relevancy table. See section "Tax Relevancy Table"

## Taxation for Split Account Assignment Lines on PO

A new option (Option 5 in dropdown) is added from release 6.5.0.0 in the /IDT/GEN\_CONFIG\_VALS - General Configuration Values table. The Global Next code checks for a value of YES to enable split account assignment for purchase order (PO)

YES = Enable split account assignment (Taxes are at the Individual Split Account Assignment level)

Not Equal to YES = Turn off feature (Taxes are at the Purchase Order Line level)

Please note that if TAXATION FOR SPLIT ACCOUNT ASSIGNMENT LINES ON PO is enabled (Option 05 = YES) then

1. Ensure that only a fixed number of account assignment lines are entered so that total of tax lines do not go beyond 99.
2. Or write a customer specific logic to summarize tax lines “within” a PO line (not for the whole PO).  
ONESOURCE Professional Services team can help with this.

## Retry Tool for SAP

The Global Next Retry Tool is designed to automatically retry a tax call between Global Next and ONESOURCE Determination. This can prevent or minimize tax calculations errors due to potential network instability or connectivity issues.

The Retry Tool supports all Global Next modules and is limited to a maximum of 2,000 line items.



The Retry Tool is supported with Global Next versions 6.4.4.0 and up.

## Configuration Instructions

**Prerequisite:** The Retry Tool transport must be imported into your system prior to configuration.

### Step 1

From the Global Next menu, navigate to **Customer Setup and Extensions > Configuration Tables > General Configuration Values** or to transaction **/IDT/GEN\_CONFIG\_VALS**.

Change View "General Configuration Values": Overview								
 New Entries      								
General Configuration Values								
Option	Sort O...	A...	R...	Route Name	C...	CoCd	General Configuration Option	Value
UNPLANNED DELIVERY COST OVERRIDE...	100001	<input checked="" type="checkbox"/>	*	*	*	*	ZZADRNR	
RETRY MECHANISM	100001	<input checked="" type="checkbox"/>	*	*		*	1 1 500	

## Step 2

Click the **New Entries** button and populate the following fields:

FIELD	ENTRY
Option	A Retry Mechanism
Sort Order	Provide a custom sort order
Active	Enter "X"  The routine will not work if this field is blank
Route Group	Maintain for the relevant Route Name or * if applicable for all
Route Name	Maintain for the relevant Route Name or * if applicable for all
Country Group	Maintain for the relevant Country Group or * if applicable for all
Company Code	Maintain for the relevant Company Code or * if applicable for all

## Step 3

**General Configuration Option:** The program expects to receive the following mandatory values and parameters as described in the table below.

 The routine will not function if any of these fields are left blank or are not populated in order.

Value Type	Field	Example
Minimum Values	Number of seconds to wait	1
	Number of retries	1
	Maximum number of line items	50
Maximum Values	Number of seconds to wait	5
	Number of retries	5
	Maximum number of line items	2000

## Configure Logs

This table gives you significant flexibility on the setup and use of logs in the system. New with this Integration, the logs are now written to custom tables in SAP and a user can locate and search the list of logs quickly and easily. Changes to the type of logging that you need in your system are now fast and easy with no down time or interruption. Log configuration changes will go into effect immediately after saving the change. This table is delivered so that maintenance in a production system is allowed. Your SAP Security Administrator can set this up for you. Access can be controlled via the transaction code **/N/IDT/LOG\_CONFIG**.

There are two views to this table. **/N/IDT/LOG\_CONFIG\_V** transaction is in the standard tables section of the menu and is populated with one line as part of the installation of the product. Transaction **/N/IDT/LOG\_CONFIG** is in the Customer user menu and is where system users can manage their own setting for log level by person, transaction code, company code, etc.

Transaction Code: **/N/IDT/LOG\_CONFIG\_V**

Transaction Code: **/N/IDT/LOG\_CONFIG**

For the Customer view of this table the sort order begins with 100001 through 999999.

The different configuration options are as follows:

COLUMN	DESCRIPTION
Username	The SAP system logon ID of the user logging should apply to.
Transaction Code	Transaction code to be logged.
Company Code	Company Code
Application Server	To isolate a network connection issue, you may want to limit your Log Level to a given SAP server that may be experiencing a problem.
Log Level	<p>NONE – no logging at all</p> <p>ERRORS – only severe errors</p> <p>DEBUG – all request/response XML details</p>



When configuring logging, performance implications should always be considered as well as space considerations. All logs are written to table /IDT/D\_LOG. This table can grow quickly and should be monitored. See information in the User Guide on the log archive function.

The standard line with sort order of 10 is provided in this table as part of the transport. It is considered the default for a production system and therefore set to log level “ERRORS”.

## Negate Direction of Tax Types

Transaction code: /N/IDT/NEG\_TAX\_TYPE\_V

Display View "Negate Tax Types: Standard": Overview				
 				
Negate Tax Types: Standard				
S...	Tax Type	Sort ...	A...	Dir of Tax
<input checked="" type="checkbox"/>	AC	10	<input checked="" type="checkbox"/>	0
<input checked="" type="checkbox"/>	ER	10	<input checked="" type="checkbox"/>	0
<input checked="" type="checkbox"/>	IM	10	<input checked="" type="checkbox"/>	0
<input checked="" type="checkbox"/>	IR	10	<input checked="" type="checkbox"/>	0
<input checked="" type="checkbox"/>	RC	10	<input checked="" type="checkbox"/>	0

This table is used to negate one side of double-sided tax entries. Certain tax types like acquisition tax or reverse charge scenarios calculate a self-pay accrual as an outgoing tax accrual and an incoming side for the recovery amount. Two tax blocks are returned from Determination in these scenarios and one side of the entry must be negated so that the net balance from the Determination tax calculation correctly nets to zero with a debit and credit to the correct General Ledger accounts that are assigned. In this standard view of the table the user cannot change the entry, but it is available for viewing and is populated with the five tax types that are used for the double-sided entry scenario. The output direction for these tax blocks are identified as the ones requiring the negation entry.

Transaction code: /N/IDT/NEG\_TAX\_TYPE

New Entries: Overview of Added Entries				
    				
Negate Tax Types: Custom				
S...	Tax Type	Sort ...	A...	Dir of Tax
<input type="checkbox"/>	ac	100001	<input checked="" type="checkbox"/>	I


This view of the table is available in the user configuration section of the menu for use by the customer to either override a line-item from the standard view of the table or to assign a new entry. The table is shipped blank and a user will not likely need to make any adjustments using this table. In the print screen above we show the example of an entry in the customer view of the negation table that changes the standard table view for the AC tax type. Here the negation has been switched to the "I" direction rather than the O direction. This is just an example of how this customer view of this table could be used if needed.

## Offset Configuration by Country

Often with Canada taxes, a vendor may charge the Federal level GST but they are not registered in a specific province to collect PST. In this situation the person receiving the invoice may be required to self-accrue the PST for their province. A new table **/IDT/D\_PART\_SA** has now been created to address the need for an offset posting to be created for the accrual of the required tax. This new table can be used for the self-accrual of Canada PST for various provinces but it can also be used to establish other self-accrual entries in situations where the Determination has returned only one tax block and must be offset with another side to the entry other than the customer or vendor account. This was often handled in the past with the system user creating a second custom authority and special rules to reverse the sign on the custom authority to post the credit to the tax liability account and also the debit with an offsetting custom authority to the expense account. This new table can eliminate the use of a second custom authority in such cases however it should only be used for items that are being accrued from a Vendor invoice as a non-recoverable and charged to expense, as the offset line is not included in the audit database or tracked for recoverability of the item. This table cannot be used now for offsetting items charged to a customer through an SD sales order.

## Tax Code and TCQ Configuration

In order for the new table to work you will first need to configure a new tax code that will be used to trigger the self-accrual input tax of the specific authority's tax liability. For, we established I2 tax code as a driver input tax code and created a Tax Code Qualifier to assign the same tax code number as the final tax code in the transaction for the PST self-accrual. A data entry person in Accounts Payable would need to be trained to recognize when the vendor should have charged PST for the province and know how to input the new tax code that drives the self-accrual process. (With proper use of access sequences in the calculation schema, a system could be configured to include a vendor and ship to address sequence logic to allow for an automated assignment of the new tax code for default processing.)

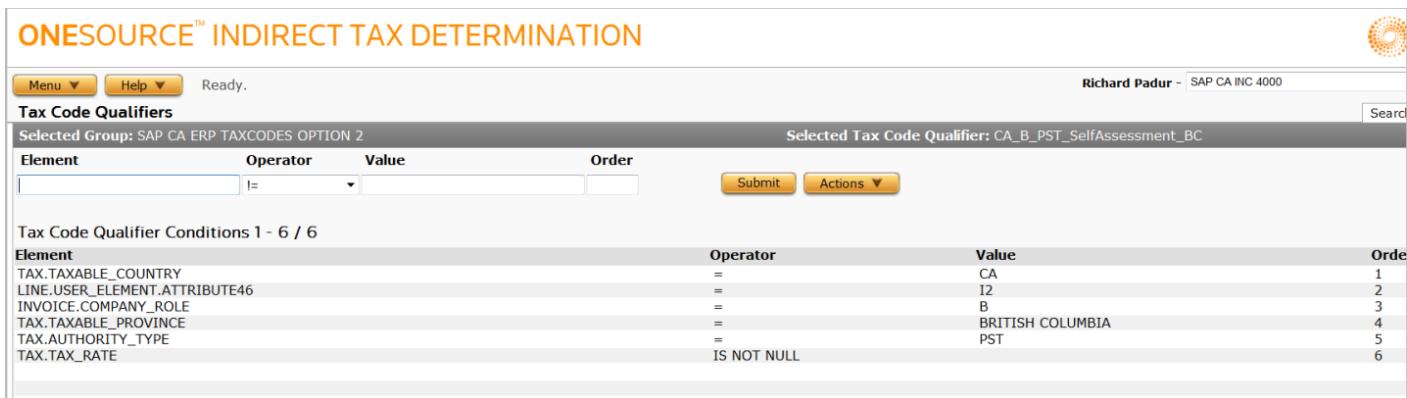

The screenshot shows the SAP OneSource Indirect Tax Determination interface. The title bar reads "ONESOURCE™ INDIRECT TAX DETERMINATION". The top navigation bar includes "Menu", "Help", and a "Ready." status indicator. The main area is titled "Tax Code Qualifiers" and shows a table for "Selected Group: SAP CA ERP TAXCODES OPTION 2". The table has columns: Element, Operator, Value, and Order. A single row is shown with the element "TAX.TAXABLE\_COUNTRY", operator "=", value "CA", and order 1. Below the table, a message says "Selected Tax Code Qualifier: CA\_B\_PST\_SelfAssessment\_BC". The bottom section, titled "Tax Code Qualifier Conditions 1 - 6 / 6", shows a table with columns: Element, Operator, Value, and Order. It lists six conditions for the "TAX.TAXABLE\_COUNTRY" element, with values CA, I2, B, BRITISH COLUMBIA, PST, and IS NOT NULL, and orders 1 through 6 respectively.

When the entry is triggered from the table below the **LINE.USER\_ELEMENT.ATTRIBUTE46** is populated with the tax code that was used. This attribute is then also used in the tax code qualifier conditions in order to drive the final tax code to the same final tax code for reporting purposes. See example above of the TCQ for the self-accrual input tax code for Canada PST in British Columbia.

## Table Configuration

Transaction code: **/N/IDT/OFFSET\_CONFIG**

Now that you have created the tax code and the TCQ then next process is to configure this table as shown above with two options for setting the tax parameter and tax parameter value:

Option 1: Tax parameter set on tax type allows you to then set up to 10 values in the tax parameter value field. Each must be separated by a comma. This option can be used if you want to drive the mapping based on a set of tax parameter values that are used for the various applicable transactions.

Option 2: Tax parameter set on authority type allows you to then set up the table entry based on the authority (in this case PST) that you want to self-accrue for the transaction.

The offset account must always be either to a NVV type of account key that drives the posting to the expense account, or you must set this to an account key assignment that will post to another expense account from the P&L. This side of the entry coming from this table is never posted to the audit database and must be used only for expensing the debit posting side and never assigned to a recoverable tax account on the Balance Sheet or to a liability account that must be reflected in audit.

## Required Route Configuration with New Journey for Offset

A new journey has been established for this self-accrual offset table process and mapping must be done in the /IDT/AUTO\_JOURNEYS custom view of the table to activate this function for given processes within the system. See below an example of the required additions you must enter to this table to activate the use of the offset functionality:

Transaction: **/IDT/AUTO\_JOURNEYS**

Change View "Auto Processed Journeys for Route: Custom": Overview								
     								
Auto Processed Journeys for Route: Custom								
S...	Route Name	Journey Name	Req/Resp	Sort ...	A...	C...	CoCd	
<input type="checkbox"/>	/IDT/ROUTE_GROUP_SALES	/IDT/JOURNEY.Utility_Response	Response ▾	100001	<input type="checkbox"/>	*	*	
<input type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_SELF_ASSESSMENT	Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	
<input checked="" type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_FI	/IDT/JOURNEY_SELF_ASSESSMENT	Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	
<input type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_LIV	/IDT/JOURNEY_SELF_ASSESSMENT	Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	

Display View "Auto Processed Journeys for Route: Custom": Overview								
   								
Auto Processed Journeys for Route: Custom								
Standard	Route Name	Journey Name	Req/Resp	Sort Order	Act...	Cntry Grp	CoCd	
<input type="checkbox"/>	/IDT/ROUTE_GROUP_PURCHASING	/IDT/JOURNEY_SELF_ASSESSMENT	2 Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	
<input type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_AP	/IDT/JOURNEY_SELF_ASSESSMENT	2 Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	
<input type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_FI	/IDT/JOURNEY_SELF_ASSESSMENT	2 Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	
<input type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_LIV	/IDT/JOURNEY_SELF_ASSESSMENT	2 Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	
<input type="checkbox"/>	/IDT/ROUTE_NON_GROUP_DOC_SES	/IDT/JOURNEY_SELF_ASSESSMENT	2 Response ▾	100001	<input checked="" type="checkbox"/>	*	4000	

The new journey /IDT/JOURNEY\_SELF\_ASSESSMENT must be mapped in this table for each of the routes that you need the offset to work within. The FI, LIV, and non-group A/P routes have been mapped to activate this response logic for vendor invoices. If you have other processes that you may also have need for an offset function, then other routes may also be required. In this example above, we did the mapping for only company code 4000 for a Canada scenario however you may wish to leave this with an “\*” in order to cover all possible company code requirements.

## Plants Abroad Billing Types

Transaction code: /N/IDT/PLANTS\_ABROAD

This table is used by the Plants Abroad Journey to identify which billing types are to be used for the Plants Abroad calculation. The table is customer view only and is shipped blank. The user will need to populate the table with the correct billing type for their specific Plants Abroad calculation and configuration settings. In the standard set up scenario this would be billing type WIA however a user could elect to create a different billing type for this purpose and would need to enter the new billing type here for the Plants Abroad journey to pick it up correctly.

To remove an entry from this table, switch over to change mode on the table, select the line you wish to delete and then click on the delete button (shift F2).

To add an entry to this table, switch over to change mode on the table, select the **New Entries** option from the app menu and enter the new billing type from the drop-down list. Hit **ENTER** to save the entry.

## *FI Process Control Configuration*

This is a very important table for your configuration, and you will end up spending a bit of time in the customer view of this table to make sure all of your document types are addressed. We have supplied several document types in the standard view however there are likely many SAP supplied document types and custom document types that you will need to add.

This table defines what “FI Processes” might run for a specific document type on the transaction and lists them in order of preference.

Each “FI process” then has logic to see if it is appropriate for the current transaction.

Transaction code: /N/IDT/FI\_CONTROL\_V

Display View "FI Control Process: Standard": Overview								
FI Control Process: Standard								
S...	Pr...	Type	Sort ...	A...	C...	CoCd	Tax Calculation Process Class	Description
<input checked="" type="checkbox"/>	GM	SA	1000	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROCESS_GOODS_MOVEMENT	Goods Movement Tax Accrual Document
<input checked="" type="checkbox"/>	GN		10	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROCESS_PURCHASE_ITEM	Purchasing Item
<input checked="" type="checkbox"/>	GN		20	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROCESS_DEFERRED_TAX	Deferred Tax
<input checked="" type="checkbox"/>	GN		30	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_AR_DOWN_PAYMENT	AR Down Payment
<input checked="" type="checkbox"/>	GN		40	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_AP_DOWN_PAYMENT	AP Down Payment
<input checked="" type="checkbox"/>	GN		50	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_SERVICE_ENTRY_SHE	Service Entry Sheets
<input checked="" type="checkbox"/>	GN	AB	10	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_DEFAULT_GL	Default G/L
<input checked="" type="checkbox"/>	GN	AB	20	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_CREDIT_M	Customer Credit Memo
<input checked="" type="checkbox"/>	GN	AB	30	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_INVOICE	Customer Invoice
<input checked="" type="checkbox"/>	GN	AB	40	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_VENDOR_CREDIT_MEM	Vendor Credit Memo
<input checked="" type="checkbox"/>	GN	AB	50	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_VENDOR_INVOICE	Vendor Invoice
<input checked="" type="checkbox"/>	GN	AB	60	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROCESS_DEFERRED_TAX	Deferred Tax
<input checked="" type="checkbox"/>	GN	DA	9	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_DEFAULT_GL	Default G/L
<input checked="" type="checkbox"/>	GN	DA	10	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_CREDIT_M	Customer Credit Memo
<input checked="" type="checkbox"/>	GN	DA	20	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_INVOICE	Customer Invoice
<input checked="" type="checkbox"/>	GN	DA	30	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_AR_DOWN_PAYMENT	AR Down Payment
<input checked="" type="checkbox"/>	GN	DG	10	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_CREDIT_M	Customer Credit Memo
<input checked="" type="checkbox"/>	GN	DG	20	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_INVOICE	Customer Invoice
<input checked="" type="checkbox"/>	GN	DR	10	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_INVOICE	Customer Invoice
<input checked="" type="checkbox"/>	GN	DR	20	<input checked="" type="checkbox"/>	*	*	:/IDT/FI_PROC_CUSTOMER_CREDIT_M	Customer Credit Memo
<input checked="" type="checkbox"/>	GN	DZ	10	<input checked="" type="checkbox"/>	*	*	:/IDT/FT_PROC_DEFAULT_GL	Default G/L

The standard view of this table contains some of the mappings of standard document types as they relate to the hierarchy of tax calculations used for the document type. You will see that there are multiple tax calculation process classes assigned to a given document type code, for example: SA document type could use the following nine process class:

1. /IDT/FI\_PROC\_DEFAULT\_GL
2. /IDT/FI\_PROC\_CUSTOMER\_CREDIT\_M
3. /IDT/FI\_PROC\_CUSTOMER\_INVOICE
4. /IDT/FI\_PROC\_VENDOR\_CREDIT\_MEM
5. /IDT/FI\_PROC\_VENDOR\_INVOICE
6. /IDT/FI\_PROC\_LIV\_CREDIT\_MEMO
7. /IDT/FI\_PROC\_LIV\_INVOICE

8. /IDT/FI\_PROCESS\_DEFERRED\_TAX

9. /IDT/FI\_PROCESS\_FB05

The sort order of these classes is dependent on the given document type. A document type for a credit memo would use the credit memo class as higher in this sort order than an invoice class. A document type for an invoice would use the invoice class first followed by the credit memo class. Not all classes are assigned to the table depending on where the document is used. Example: for a customer document type, you would not assign a vendor class and vice versa. The list should sort from the most specific to the most general being at the top of the sort. This is why you see the deferred tax and FB05 process classes listed last on the sort order for SA document type as they are the most complex and specific.

The table below lists the various tax calculation process classes including a brief description.

TAX CALCULATION PROCESS CLASS	DESCRIPTION
/IDT/FI_PROC_DEFAULT_GL	Used for general FI transactions that do not contain either a customer or a vendor
/IDT/FI_PROC_CUSTOMER_CREDIT_M	Used for a customer credit memo or returns type of document
/IDT/FI_PROC_CUSTOMER_INVOICE	Used for a customer invoice type of document
/IDT/FI_PROC_VENDOR_CREDIT_MEM	Used for a vendor credit memo or returns type of document
/IDT/FI_PROC_VENDOR_INVOICE	Used for a vendor invoice type of document
/IDT/FI_PROC_LIV_CREDIT_MEMO	Used for a LIV vendor credit memo process
/IDT/FI_PROC_LIV_INVOICE	Used for a LIV vendor invoice process
/IDT/FI_PROCESS_DEFERRED_TAX	Used for either a customer or vendor document that uses the deferred tax process
/IDT/FI_PROCESS_FB05	Used for a document that could be for customer invoice or credit memo, vendor invoice or credit memo, deferred tax or cash discount.
/IDT/FI_PROC_AP_DOWN_PAYMENT	Used for A/P down payment process
/IDT/FI_PROC_DELIV_NOTA_FISCAL	Used for Brazil Nota Fiscal
/IDT/FI_PROC_GM_BR	Used for Brazil goods movement process

/IDT/FI_PROC_SERVICE_ENTRY_SHE	Used for service entry sheet process
/IDT/FI_PROCESS_GOODS_MOVEMENT	Used for the Goods Movement product processes

The table is part of the standard settings and set as shown as part of the initial transport process however your system may be configured to use more than this list of document types or you may have created your own customer document types. The standard view of the table as provided is not all inclusive and you must add entries to the customer view of this table based on your specific needs.

If you go back and review the print screen of the standard view of this table, you will see that there are two lines at the beginning that are populated without a document type being specified. The two lines are added to the table for specific situations where the document type is not available at the time of the document line being called. This happens within the calculation for a purchase order line-item and for a deferred tax processing line-item. Both classes are added to this table for specific processing needs that occur when the tie to a document type is not possible due to system logic within SAP. You will not need to worry about these two lines, nor will you have to adjust them within the customer view of this table. They are internal to our processing logic.

Transaction code: **/N/IDT/FI\_CONTROL**

This transaction will take you to the Customer view of this table in the Customer Setup menu. In this view of the table you can add your own lines for any missing document types that you need to configure, and for missing class configuration for all document types you are using. Note that the sort order range again uses numbers starting at 100001 through 999999. In the sort order the program starts with the highest number and the most applicable highest number in the mapping is used.

The table initially comes up in display mode. Switch to CHANGE mode and select NEW ENTRIES. This table is shipped blank for user input. Because this is a Customer view you will not be able to check the standard checkbox as this is only used on the standard view of the table.

## Overriding the Standard Table


If you wish to remove or override a line that is on the standard view of the table, you will need to replicate the full set of classes that you want in your new mapping for the given document number. (Excluding the line you wish to remove) For example:

If you have configured your system differently so that customer credit memo and invoices are using a custom document type rather than SA for your given transaction you would want to remove the line 20 and 30 from this list.

Because of the way the table sort order works it will pick up the last applicable line entry starting with the customer view of the table (100050,100040, etc.) and ending with the last sort order applicable from the standard view setup (50,40,30,20, etc.) for the given document type.

It is important that you check your system configuration for each document type and make sure that this table has the appropriate classes listed for the document type you are using based on the list of Account Types that have been checked as “allowed” for the document type. To do this, go to the following transaction:

Transaction: **SPRO** navigate to **> Financial Accounting > General Ledger Accounting > Business Transactions >G/L Account Posting > Make and Check Document Settings > Define Document Types.**

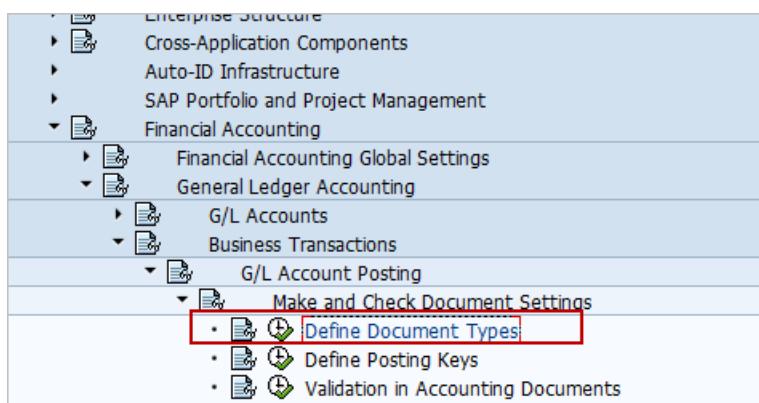

Select your document type and double click to go to the first screen on the document type.

**Change View "Document Types": Details**

 **New Entries**     

Document Type	AB	Accounting document
---------------	----	---------------------

**Properties**

Number range	01	<a href="#">Number range information</a>
Reverse DocumentType	AB	
Authorization Group		

**Account types allowed**

- Assets
- Customer
- Vendor
- Material
- G/L account

**Special usage**

- Btch input only

**Control data**

- Net document type
- Cust/vend check
- Negative Postings Permitted
- Inter-company postgs

**Default values**

Ex.rate type for forgn crnccy docs

Review the account types that have been allowed for the given document type. If Customer has been checked then you will want to have the Customer Invoice and Customer Credit memo class listed for this document type in the **/IDT/FI\_CONTROL** table. Likewise, if Vendor is checked then add the Vendor Invoice and Vendor Credit Memo Class. If G/L account is checked then you will likely need the Default G/L class. If this document type will be relevant for deferred taxes or cash discount processing then the respective classes will also need to be added to the list for this document type in the table.

If you do not do this check and verification process you will likely have issues with the document type not behaving correctly and incorrect tax processing assigned.

## *Tax Relevancy Table*

A customer may wish to set a given tax code as one that is not relevant to tax using ONESOURCE Indirect Tax for a couple of reasons:


- The tax code is not relevant to tax at all and the user does not want the tax code included in any calls to Determination.

- The tax code is one that will be used in a specific module of SAP using SAP's native or internal tax processes and will not be used for a call to Determination for an external tax calculation.

For both situations a table has been added so a user can identify these tax codes to prevent a call to Determination. This table is available in the Customer Setup and Extensions Configuration Tables menu.

Transaction Code: **/N/IDT/TAX\_CODE\_REL**

Display View "Tax Code Relevancy": Overview

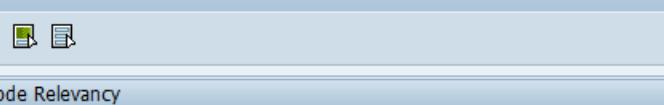

Tx	Sort ...	A...	C...	CoCd	Option	Description
A0	100001	<input checked="" type="checkbox"/>	*	*	No Tax Relevancy	▼ Output
A8	100002	<input checked="" type="checkbox"/>	*	*	SAP Tax Code	▼ Output
V0	100001	<input checked="" type="checkbox"/>	*	*	No Tax Relevancy	▼ Input
V9	100002	<input checked="" type="checkbox"/>	*	3000	No Tax Relevancy	▼ Input

By adding a given tax code for a specific list of countries or company codes you are telling the system to not include this tax code in any request call to Determination for your country/company code combination. A user can note in the Option column if the exclusion is because the tax code is exempt for tax completely, or if the tax code is to only be used by SAP internal or native tax processing separately from a call to our Determination tax engine.

This table has only a customer view and will be shipped empty upon download of the software.

Tax codes that are added to this table should be used like a driver tax code to tell the system the item is not relevant to a tax calculation. This is different than the use of a tax code that is brought back from a tax call as being exempt from tax after a call has already been completed by determination. In such a case a user should have two different tax codes.

- One should be used via the tax code qualifier as an exempt tax amount or zero tax. Entries using an “Exempt” tax code will create a call and calculation in Determination that will go to audit along with other tax codes on the same transaction. They would not be included in this table. Such would be the case if a trans-editor sent a tax block for one tax authority as taxable and a second tax block on the line as exempt for another tax authority for possibly a regional, city, or district level tax.
- A tax code as Not Relevant to tax would be used on the line as a driver and would not make a call for the whole line-item on the order. It would be used on this table to tell the system to not make a call at all for this item. No tax will be calculated, and nothing sent to the audit database for this line.

The program looks for an account key associated with this non-relevant tax code as part of an internal check. We therefore need a “dummy” account key to internally have the program find and use for the non-relevant tax code assignment. We can do this by creating a new configuration within the general configuration table and create the dummy account key using transaction code **OBCN**.

1. Set up “IDT” account key in OBCN with same configuration as current NVV account key.

Change View "Tax Processing in Accounting": Overview	
	New Entries
Pro	Description
ASB	Sales equalizatin tax
CA1	CA Sales Tax O
CA2	CA Sales Tax I
CO1	CO Sales Tax O
CO2	CO Sales Tax I
DSA	Output acquisitn tax
DSE	Input acquisitn tax
<b>ESA</b>	<b>Output acquisitn tax</b>
ESE	Input acquisitn tax
FL1	FL Sales Tax O
FL2	FL Sales Tax I
FSA	OutputRvrseChargetax
FSE	
IC1	ICMS S.T. fr
ICC	ICMS complementary
ICD	Non-d.input taxDIFAL

2. Add line to transaction **/N/IDT/GEN\_CONFIG\_VALS**

Display View "General Configuration Values": Overview							
Option	Sort ...	A...	R...	R...	C...	CoCd	General Configuration Option Value
SES OVERRIDE ADDRESS	▼ 100001	<input checked="" type="checkbox"/>	*	*	*	*	ZZADRNR
FREIGHT PRODUCT CODE	▼ 100001	<input checked="" type="checkbox"/>	*	*	*	*	FREIGHT
FREIGHT CONDITION SUB-TOTAL FIELD	▼ 100001	<input checked="" type="checkbox"/>	*	*	*	*	KZWI4
FREIGHT CONDITION TEXT PREPEND	▼ 100001	<input checked="" type="checkbox"/>	*	*	*	*	F:
EXTERNAL COMPANY ID PREPEND	▼ 100001	<input type="checkbox"/>	*	*	*	4000 CA_	
EXTERNAL COMPANY ID PREPEND	▼ 100002	<input type="checkbox"/>	*	*	*	3000 BREAK	
GL LINE OVERRIDE ADDRESS	▼ 100001	<input checked="" type="checkbox"/>	*	*	*	*	ZZ_TEST
PO REF OVERRIDE ADDRESS	▼ 100001	<input checked="" type="checkbox"/>	*	*	*	*	ZIDTADRNR
IDT ACCOUNT KEY ASSIGNMENT	▼ 100010	<input checked="" type="checkbox"/>	*	*	*	*	IDT
UNPLANNED DELIVERY COST OVERRIDE...	▼ 100001	<input checked="" type="checkbox"/>	*	*	*	*	ZZADRNR

## Tax Filters Table

The tax filters table was added to the system with release 6.4.0.0 as a replication of the tax filters option that was provided in the prior 5.x Integration as part of the TaxMappings.xml and its Extension file. This was originally provided to filter out or remove from SAP a zero-rated tax result that was returned from Determination. Such zero-rated tax types as NL, ZC, ZE, ZR could be mapped to remove the additional tax block from the calculation. However, this removal only applied to the SAP side and would still carry over this zero-value block into the Determination audit data. As such it was only used to remove zero valued tax results. The new transaction and table with sample data is shown below:

Transaction Code: /N/IDT/TAX\_FILTERS

Change View "Maint. View for Tax filters": Overview						
Option	S...	Cn...	CoCd	A...	General Configuration Value	Description
TAX_TYPE	▼ 1	*	*	<input checked="" type="checkbox"/>	NL	filter for Not Liable
TAX_TYPE	▼ 2	*	*	<input checked="" type="checkbox"/>	ZC	zero rated Communit export
TAX_TYPE	▼ 3	*	*	<input checked="" type="checkbox"/>	ZE	zero rated export
TAX_TYPE	▼ 4	*	*	<input checked="" type="checkbox"/>	ZR	zero rated item

With this new feature as provided in the Customer Configurations Tables menu, a user can once again filter out these tax types. The prior version of this also allowed the option of filtering based on other objects such as by tax code or authority name. The new table also allows for this via a drop-down list in the options column of the table.

If the AUTHORITY\_NAME option is selected, then the user could input in the General Configuration Value column the name of the tax authority that is being brought back in the XML thereby filtering based on the authority name. Similarly, the TAX\_CODE option could be used if a filter omission of a given tax code is desired.

The AUTHORITY\_UUID option was added as a more stable mapping based on the UUID number of the tax authority. Whereas the AUTHORITY\_NAME field value can change over time, the UUID number does not change. We recommend that if you desire to filter based on the authority that you change your mapping to use the AUTHORITY\_UUID instead to avoid a future issue with the name change. See example above. The UUID can be copied from the XML in the log file.

The second column of this table is the sequence number column. A user would populate this in numerical order for each line of the table. This table is a customer use table and is shipped blank with no entries. If you want to filter any results based on the criteria you will need to enter new lines to this table.

#### Expected Results:

Suppressed taxes will not appear on transactions/documents.

Suppressed taxes will not be saved in BSEG/BSET.

Suppressed taxes will not be shown in normal XML log (NON\_AUDITED log).

But suppressed taxes will be shown in audit log. Meaning AUDIT logs will be shown with ALL the taxes.

Audit database will contain all the taxes including suppressed and non-suppressed.

It is very important that you understand that mapping a tax type to this table that is bringing back a value other than zero will cause a reconciliation issue between your general ledger and the Determination audit database. If you filter a non-zero tax value the entry will not display in the G/L but it will display in Determination audit. The Reconciliation report from the reporting module will end up showing a reconciling item difference between the two systems that you will later need to deal with in downstream compliance and reporting processes. It is best to not use this filter function for non-zero calculations.

## Product Version Table


The product version table was added to the system in a prior release but until 6.4 it was hidden for internal uses. As of release 6.4 this table is now available for viewing within the Basic Setup-Display only menu. The table contains the most current version information based on the transport of the version to your system. There should be one line on this table per product and will show you which upgrade version of the product you are currently using. (If you also have the Goods Movement product installed then you would see a line for product GM along with a version number.) It is not a table that the user will need to be concerned with configuration but is used for support information.

Transaction Code: /IDT/VERSION - Global Next Product Version

<b>Display View "Build IDT Integration Version": Overview</b>		
S...	Pr...	IDT Integration Version
<input checked="" type="checkbox"/>	GN	6.6.1.0

## Summarization of Tax Lines on BSEG and BSET Tables


SAP has a limit of 999 lines on FI or LIV documents and users often have a need to summarize or consolidate like lines to maximize the size of the entry. (Currently this feature does not work on SD billing documents.) To decrease the number of tax lines on a large order we have provided a new table that can be used to control summarization of the tax data lines on the accounting document for like information. This new table is a single customer view table located within the Customer Configuration Tables menu. A user can summarize tax data lines for both the BSEG and BSET tables based on General Ledger account, Tax Code, Account Key, and UUID tax authority. This feature will not summarize the expense lines. The table is part of the initial transport and is shipped blank for users to be able to configure.

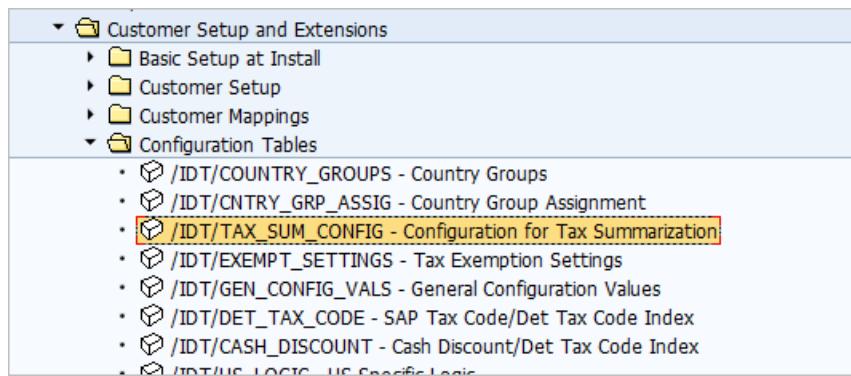

The screenshot shows the SAP Customer Configuration Tables menu. Under 'Customer Setup and Extensions', the 'Configuration Tables' node is expanded, revealing a list of tables. The table '/IDT/TAX\_SUM\_CONFIG - Configuration for Tax Summarization' is highlighted with a red box.

- Customer Setup and Extensions
  - Basic Setup at Install
  - Customer Setup
  - Customer Mappings
  - Configuration Tables
    - /IDT/COUNTRY\_GROUPS - Country Groups
    - /IDT/CNTRY\_GRP\_ASSIG - Country Group Assignment
    - /IDT/TAX\_SUM\_CONFIG - Configuration for Tax Summarization**
    - /IDT/EXEMPT\_SETTINGS - Tax Exemption Settings
    - /IDT/GEN\_CONFIG\_VALS - General Configuration Values
    - /IDT/DET\_TAX\_CODE - SAP Tax Code/Det Tax Code Index
    - /IDT/CASH\_DISCOUNT - Cash Discount/Det Tax Code Index
    - /IDT/US\_LOGIC - US Specific Logic

Transaction: /N/IDT/TAX\_SUM\_CONFIG

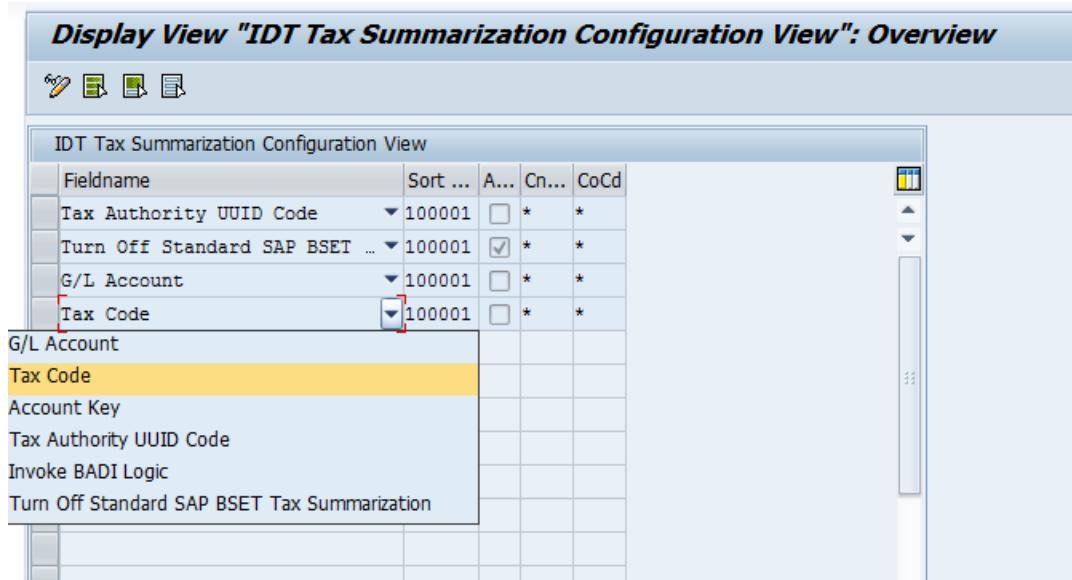

The screenshot shows the 'IDT Tax Summarization Configuration View' table. The table has columns: Fieldname, Sort ..., A..., Cn..., and CoCd. The rows are: Tax Authority UUID Code (Sort 100001, A\*, C\*, CoCd\*), Turn Off Standard SAP BSET ... (Sort 100001, A\*, C\*, CoCd\*), G/L Account (Sort 100001, A\*, C\*, CoCd\*), and Tax Code (Sort 100001, A\*, C\*, CoCd\*). The 'Tax Code' row is highlighted with a yellow background. To the left of the table, a context menu is open with options: 'Edit', 'New', 'Delete', 'Copy', and 'Paste'.

Fieldname	Sort ...	A...	Cn...	CoCd
Tax Authority UUID Code	100001	<input type="checkbox"/>	*	*
Turn Off Standard SAP BSET ...	100001	<input checked="" type="checkbox"/>	*	*
G/L Account	100001	<input type="checkbox"/>	*	*
Tax Code	100001	<input type="checkbox"/>	*	*

Context menu options: Edit, New, Delete, Copy, Paste

This table is shipped blank and the user can elect to input a summarization like the example shown above. The table can be configured for specific country groups and company codes. In the example above all four fieldname options are shown and this would provide the most detailed example with the least amount of line-item summarization based on all four criteria at once. One could also elect to have the maximum amount of summarization by only entering the first line of G/L Account. In all cases it is imperative that you start by using the G/L account fieldname first in your selected setup. This table summarization logic will also keep debit and credit entries summarized as separate totals to avoid any possible logic errors where the net of the lines sums to zero. If you elect to add additional levels of summarization then the tax code, account key and UUID options may also be selected.

If you have assigned multiple tax codes to the same G/L account in your T007L account assignment table then you may encounter an error if you have summarization turned on for G/L account only. Error FF716 “Error in assigning the Tax Group” may occur when trying to process a document. If you encounter this error and have multiple tax codes assigned to the same G/L account, then you must select the summarization by both the G/L account AND the Tax code to avoid this error. See above screen shot for example shown with both selected.

A new option has been added to this table that provides user the ability to prevent the standard SAP summarization from happening on the FI and LIV documents. If the user selects this option then the SAP method that does the standard summarization will be skipped and the other table options on this table will follow afterwards to allow alternate summarization. This can sometimes be helpful for companies that utilize large LIV or FI documents that contain many lines and multiple account assignment features that can hit the 999 item limit per line. Depending on how tax codes and account keys/accounts are assigned, standard SAP summarization may cause summation of different tax authority items that are not in sync with desired detail reporting needs downstream (more often seen in US sales tax scenarios).

A new BADI function has also been added to this table as one of the options. A user can elect to use it to add other custom ABAP enhancements to the summation logic such as limits based on the number of tax lines on the document, document type, or any other logic that the user wishes to add to the summarization beyond the four options noted above. For example, you may wish to only have summarization occur on the transaction if there are more than 100 revenue/expense lines on the document.

The new BADI is **/IDT/BADI\_ADJUST\_TAX\_SUMMATION**. You can learn more about utilizing this addition via the Installation and Programmers Guide. This BADI was added as of release 6.2.0.1. If you select this option from the drop-down list on the table then you can activate it and program your required logic within the BADI using an ABAP program. The BADI must be selected and activated in this table for the logic to be applied for your selected company code(s).

Currently this table will summarize BSEG and BSET table tax lines only for LIV and FI module transactions being posted to the General Ledger. We have not extended this functionality to SD billing documents. The process will be extended to billing documents in a future release of the product.

## Consideration When Using Summarization

If you elect to summarize data on the BSEG and BSET tables then your VAT report will reflect this summarized level for reporting. This will need to be considered when looking at downstream reporting processes and where you will get your information for reporting and compliance. The Audit database in determination as well as the BSEG and BSET tables will have summarized data at the level that you have selected and depending on how you have assigned tax codes and G/L account numbers you may require a finer breakout for reporting and compliance needs than you have allowed with this configuration. If this is an issue then you may be able to get full detail data on your transaction by using the data stored in the **/IDT/D\_TAX\_DATA** table.

The **/IDT/D\_TAX\_DATA** however may not have all the fields that you require. Currently the tax amount is not repopulated there and a user may elect to add additional fields to the **/IDT/D\_TAX\_DATA** table to have the required fields for detailed reporting using this table. Use of summarization will require that you play with this feature given your specific transaction size, complexity, and tax policy. Several iterations of testing and adjustments may be required.

## Summarization for Partial Payments on Deferred Tax Invoices (RFUMSV25)

If a deferred tax invoice with multiple line-items is processed with a partial payment the system will potentially incorrectly transfer to the target tax account the full amount of the line-items rather than the partial payment amount. This occurs at time of the F.38 transfer program being run, and only on invoices that have multiple lines on them that are charged to the same tax code.

Workaround: If you use partial payments on deferred tax invoices this issue can be avoided by setting the tax summarization table configuration to summarize tax lines at both the tax code and G/L account level. By doing this the lines on the invoice will be summarized into one tax line for the authority and the F.38 program will then handle the amount correctly and only transfer the partial payment amount to the target tax code.

## Special Note for India

Per documentation for India GST that we have seen, your India company codes should not contain any summarization. Make sure that if you use the summarization table that you do not blindly use the “\*” asterisk for selection of company code or country group. Take time to create appropriate country groups so that you configure this table to not include country India.

## BAPI Configuration for Posting

We have identified a list of BAPI processes that we have heard that our customers use. Most of these are working well with our integration with a few exceptions which we have addressed for customers based on their work with our Professional Services team. Some however require additional adjustments for them to work well with our Integration logic.


The use of BAPI\_ACC\_DOCUMENT\_POST requires some additional adjustments to provide a complete calculation and post process. Support for this BAPI can be quite convoluted and complex given the many additional checks it makes and the different scenarios that customer wish to apply to the system with their use in various applications. Our Professional Services team has provided support for this BAPI in the past with additional includes and enhancements within the BAPI itself for the call that is standard within this BAPI as a pricing call. We have elected to provide a new option that involves the use of a separate utility to do the tax call and calculation/population of the tax data for the posting of the document. This utility could be applied to a batch job process as a separate first step which then initiates the BAPI within the utility, however, for some needs this will not be possible and an enhancement include statement is needed within the BAPI to call this new utility early before the rest of the BAPI processes. This insert at the beginning of the BAPI is separate from the pricing call that is made later in the program. The later pricing call and audit call can then be separately controlled as we will speak to shortly with the use of two configuration tables. This is an optional process as it is not required that you use these two configuration tables or the call utility, if you already have a solution in place from Professional Services.



If you have already applied modifications to this BAPI based on support from our Professional Services team then you have the option to leave these two tables blank and not use this added tax call utility. Or, you could elect to remove the modifications and use this process instead. It is your choice and you are not forced to convert to this process.

Along with the need to make a separate tax call (use of the utility), there are times when a user may wish to avoid the need for the internal pricing call when the tax is already present within the data file being used with the BAPI (Possibly for vendor charged tax invoices). Other times the user may wish to post the item to the ledger however because of upstream processes, may want to avoid any additional posting to the Audit database in Determination (example of Ariba OK-2-Pay files where the audit call was already applied prior within the Ariba Integration). We have addressed this need with two additional tables for configuration that can be used to control these two Integration processing steps. This will give the customer maximum flexibility for such scenarios as Ariba system postings, transfer of data to a S4/HANA Central Finance environment, and other special cases such as payment card systems, batch entry of invoices, month end G/L entries, etc.

## BAPI Configuration Table

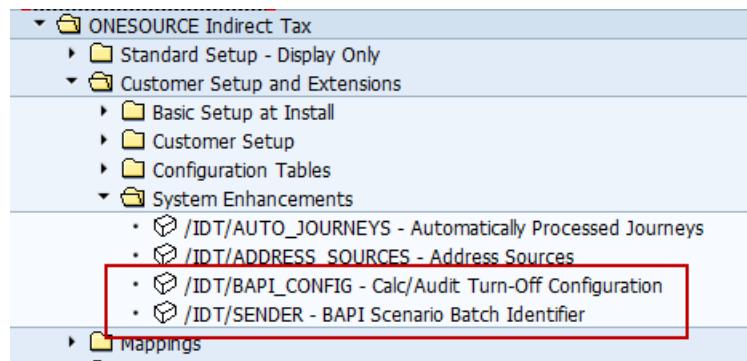

## Transaction Code: /IDT/BAPI\_CONFIG

This table is used with only the BAPI\_ACC\_DOCUMENT\_POST at this time.

Change View 'Configuration to Restrict Tax Call and/or Audit Update':					
     					
Configuration to Restrict Tax Call and/or Audit Update					
CoCd	Doc Type	Sender ID	Sort Order	StopTaxCal	StopAudUpd
*	KR	ARIBA	100001	Stop Tax Call	Stop Audit Update
1000	KR	ARIBA1	100003	Stop Tax Call	

The purpose of this table is to identify any given batch job that is used to post documents to the G/L using BAPI\_ACC\_DOCUMENT\_POST. Depending on the given scenario and purpose of this batch job, the user may need for this batch posting to the G/L to happen without a pricing procedure tax call being performed within the BAPI or (not the same as the utility included at the beginning of the BAPI), perhaps without a subsequent posting to the Determination Audit database being generated. This may be needed for some scenarios such as Ariba postings that have already calculated tax and performed Audit updates via upstream processes prior to the G/L post. The table controls the pricing call and audit call based on the two columns of this table **Stop TaxCal**, and **StopAudUpd**. Use the drop down on these two columns to stop the tax call within the BAPI, or the audit update. Leave the field blank if you wish to have the process complete the call or audit update.


**Sender ID** is a unique identifier that we are using to give a name or label to the specific job function that you are performing with the background batch job process. For example, the Sender ID may be something like: Ariba, OK2pay, AP invoice, P-Card, Transfer, Billing transfer, FI post, etc. Each scenario of batch processing should have its own Sender ID name so that the Tax Call and audit options can be applied to it based on a matchup of the Sender Id, Document type, and Company Code per this table configuration.

The **BAPI Sender Table** is used in tandem with the configuration table to label your specific batch background job with the desired Sender ID name based on several key fields within the batch job program. Use of this table is discussed further in the next section.

**Use of the Asterisk (\*)**. An asterisk can be used as a wild card in the company code field or the document type field so that you can specify all company codes or all document types as applicable in the line. Do Not use \* in the Sender Id column or Sort Order column. The Active box is used with this table so that you can turn on or activate this line on the table or opt to turn it off but keep the line for later use.

**Use of Sort Order.** The use of the sort order column follows the same logic as the use in other tables such as Field Mapping. When there is a higher sort order number the program will look to see if the selection criteria meets the criteria of the higher sort order, and if so will perform the highest line level that applies. In the example screen above, the first line is a larger set of the second line (sub-set), so for company code 1000 and doc type KR, the second option will be used. All others that match the first line but not the second, will follow the shut off logic listed in the first line.

## BAPI Sender Table

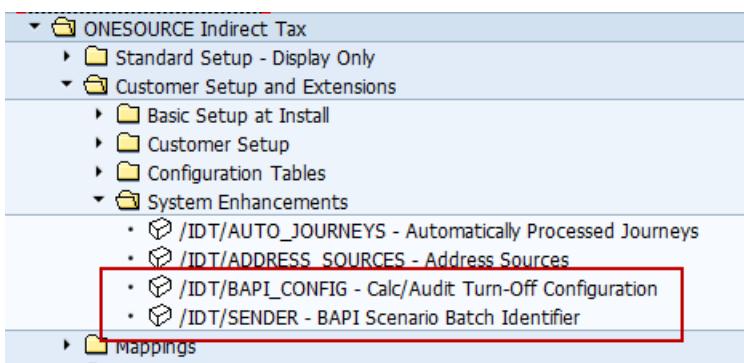


Transaction Code: /IDT SENDER

In this table you are telling the system the specific traits of a specific batch job process will be used in combination to identify a sender ID for the BAPI Configuration table. The Logical System, Program Name, and the User ID columns are used to identify this batch process as the selected Sender ID. The first three columns in combination cannot be the same as another line on the table as they are key fields to the table.

If this is a batch job that is being scheduled for EDI/IDOC and run in background, you should populate the first three columns for each of your batch processes that use these two BAPI for G/L posting. The program name, the logical system it is coming from as the source system, and the User ID that is used for this batch process should be identified, however a blank or asterisk "\*" will also work. If you have several such jobs and need for them to be treated differently on the BAPI configuration table (on and off switches), then you will need to either copy and create a new program name or create and assign a different User ID to the job so that a different Sender ID can be used and drive the BAPI Configuration to a different line and outcome. If the Job is IDOC or EDI then the logical system would be populated. If it is not IDOC or EDI, then the logical system column would not be used and is left blank.


If this is a manually entered job that is not run as a scheduled batch job, then the input is a bit different. The logical system name would not be entered and would not be input in the BAPI field OBJ\_SYS as there is no way to confirm this against the logical system field in the Sender Table. In this case the user should leave the logical system field blank and input the user ID that was used and entered in the BAPI for field USERNAME. BAPI header fields would not be populated for the first four and only populate the USERNAME at the start of the header for a manually entered job.

**Structure Editor: Change DOCUMENTHEADER from Entry**

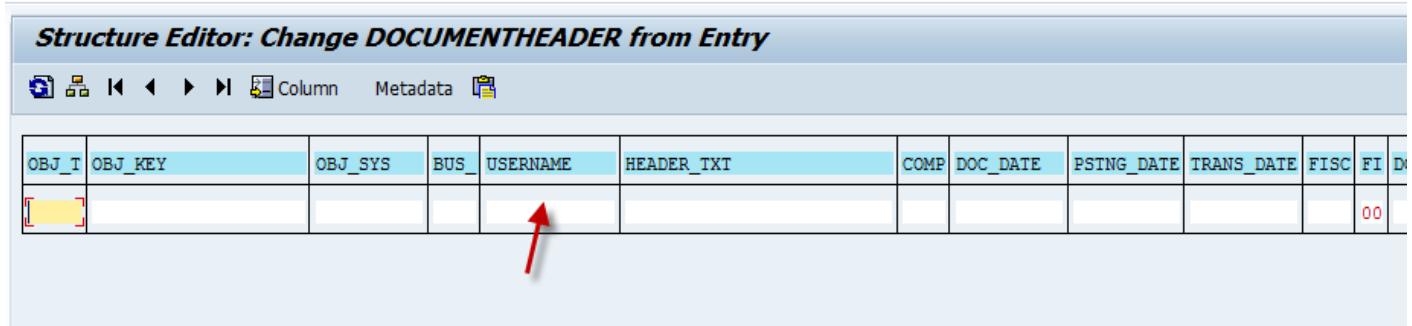

OBJ_T	OBJ_KEY	OBJ_SYS	BUS_	USERNAME	HEADER_TXT	COMP	DOC_DATE	PSTNG_DATE	TRANS_DATE	FISC	FI	DI
												00

**Change View "Sender Table Configuration View": Overview**

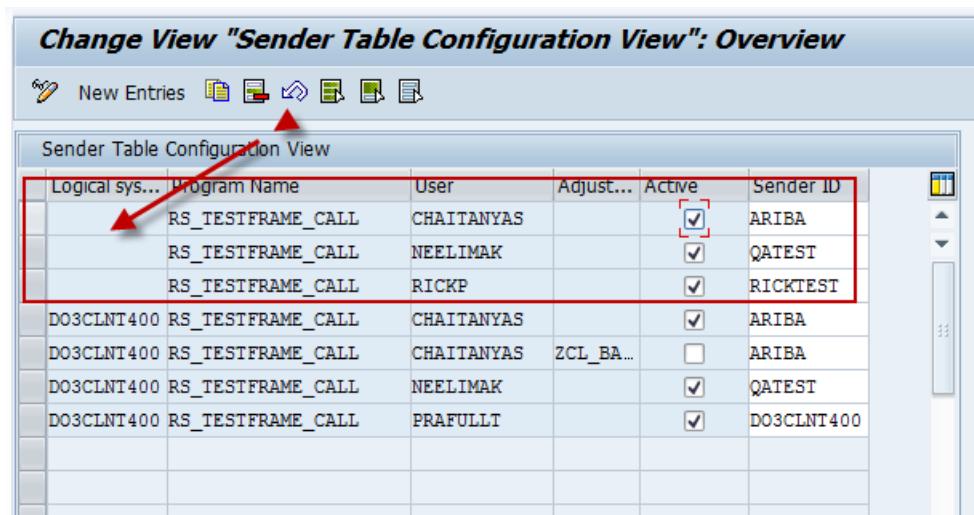



Sender Table Configuration View					
Logical sys...	Program Name	User	Adjust...	Active	Sender ID
	RS_TESTFRAME_CALL	CHAITANYAS		<input checked="" type="checkbox"/>	ARIBA
	RS_TESTFRAME_CALL	NEELIMAK		<input checked="" type="checkbox"/>	QATEST
	RS_TESTFRAME_CALL	RICKP		<input checked="" type="checkbox"/>	RICKTEST
D03CLNT400	RS_TESTFRAME_CALL	CHAITANYAS		<input checked="" type="checkbox"/>	ARIBA
D03CLNT400	RS_TESTFRAME_CALL	CHAITANYAS	ZCL_BA...	<input type="checkbox"/>	ARIBA
D03CLNT400	RS_TESTFRAME_CALL	NEELIMAK		<input checked="" type="checkbox"/>	QATEST
D03CLNT400	RS_TESTFRAME_CALL	PRAFULLT		<input checked="" type="checkbox"/>	D03CLNT400

## New Tax Calculation Utility for BAPI

For some application needs, the user may require the document that is to be posted to make a tax call and calculate the taxes prior to the BAPI posting the document. Our Professional services team has been able to assist many customers with this process with the addition of several program modification and user exits within the BAPI itself. In our attempt to productize this need we have elected to make this process a separate utility that can be run either prior to the BAPI being called or with an include statement within the BAPI so it can be utilized, and tax calculated within the BAPI. Using a separate utility along with the use of the new configuration tables we hope will provide a flexible model that can adapt for many separate uses for a variety of needs.

The new utility is **/IDT/TAX\_CALC.Utility\_BAPI**

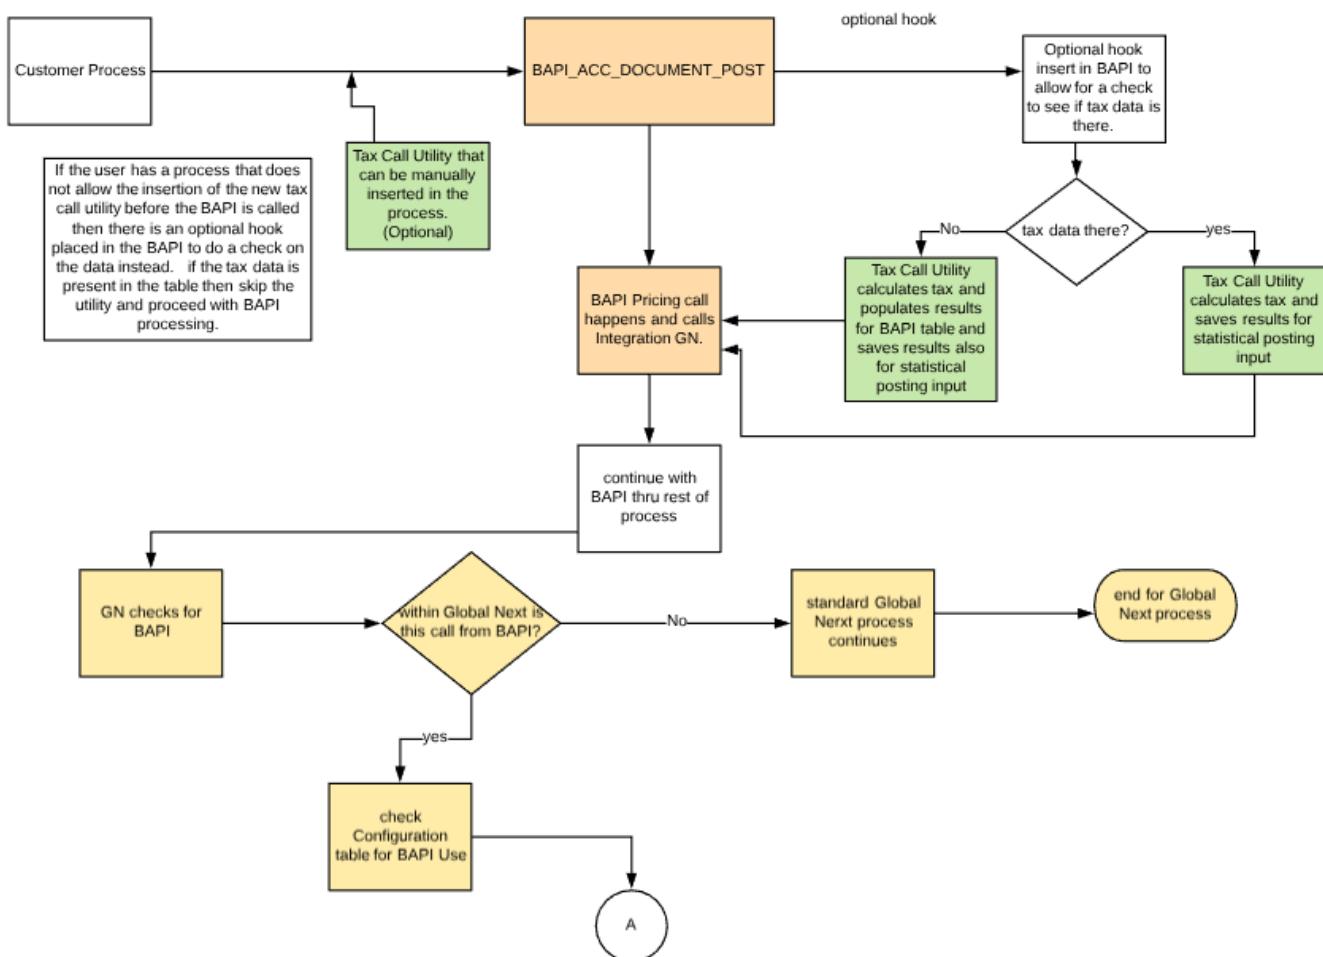

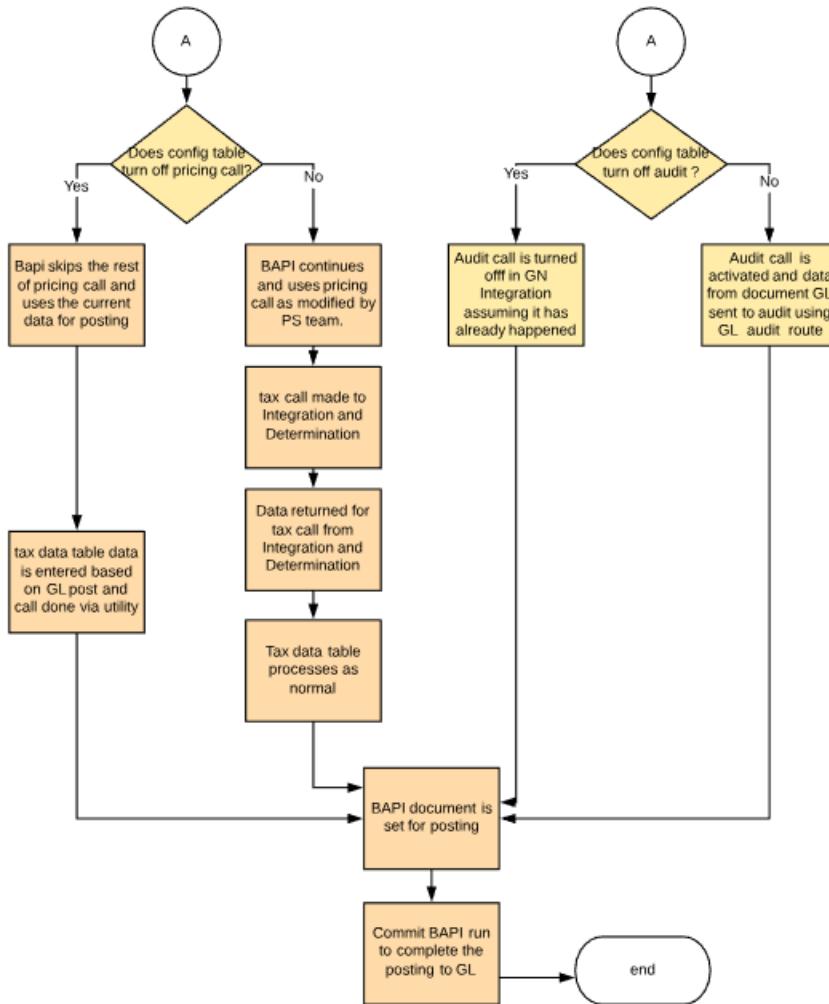

### New Optional Include Statement for BAPI

There is an optional user exit/ include statement that can be placed at the beginning of the BAPI program is the situation calls for the tax calculation utility to be called within the Post BAPI rather than a run of the utility prior to the BAPI being called. This is also outlined in the Installation and Programmers Guide as part of the install of the product.

An Include is also required in the BAPI within this function to avoid an error with the assigned account key for the line-item. See *Installation and Programmers Guide* for further instructions.

If you do not use the utility to make a tax call within the BAPI using the include, then what you will get as an entry to the tax data table will not go through the tax tab mapping in the field mapping table. You will only get the data that was entered in the BAPI data table. Data population will be different. To ensure that you have the data that is mapped in the tax tab journey in mapping you must run the document through the utility for a tax call. Same goes for the posting to audit. What you will see without the tax utility call will only be what was posted on the G/L using the BAPI input data.

## *List of BAPI Supported*

The list of the various BAPI that we are testing and supporting through the product is now a section within the *Installation and Programmers Guide*.

# TAX DATA MAPPING

The tax data mapping by means of the Flexible Field Mapping and Address Mapping can be considered the heart of your system configuration and the one that you will spend the most time working with in your setup of the Integration. The field mapping table provides the ability for mapping SAP fields to the Determination request data and from the response data back to SAP without the need to write any custom code. This allows the Tax Business Analyst who configures a company's tax policy in SAP and Determination to leverage both sides to their full potential.

## Flexible Field Mappings

The Flexible Field Mapping consisted of two views, the standard view delivered by Thomson Reuters with the default field mappings delivered as part of Integration, and a custom view. The custom view allows you to add new mappings or override existing mappings delivered in the standard view. As of Integration release 6.4.1.0 the field mapping table has undergone some major changes to improve usability of the table as well as significant improvements to performance time for the processing of large invoices with line-items numbering over 1,000.


For usability the table is now combined into a single view and transaction code so that users can see both the standard mappings and their custom mappings in one table. The table itself is now presented in its entirety using the options for ALV grid so that users have more flexibility to view the table as well as being able to view it in Excel mode and download it to Excel formatted files that can be saved to your hard drive. Other field options are also provided such as filtering, insert, formatting. A new selection screen is shown first so that a user can elect to view the whole table or any combination of journey sections that they desire as a partial view of the table.

Performance improvements have been achieved that reduce the time for heavy invoice processing on documents with over 1,000-line-items. Testing has confirmed a 15X improvement on a 3,000 line invoice, reducing field mapping processing time from 15 minutes down to 1 minute. To achieve this improvement goal, the programs have been changed to utilize dynamic generated code (versus static code development) to select field mapping based on configuration done within the field mapping configuration. This is code that would be created for a specific field and base mapping. If a field mapping or base mapping changes, this code is re-created at the next tax calculating transaction. The functionality of the new mapper should not change at all and be exactly the same as the old field mapper.

## Field Mapping Table

A new Combined View with default mappings has been provided.

Transaction Code: **/N/IDT/FIELD\_MAP\_NEW**

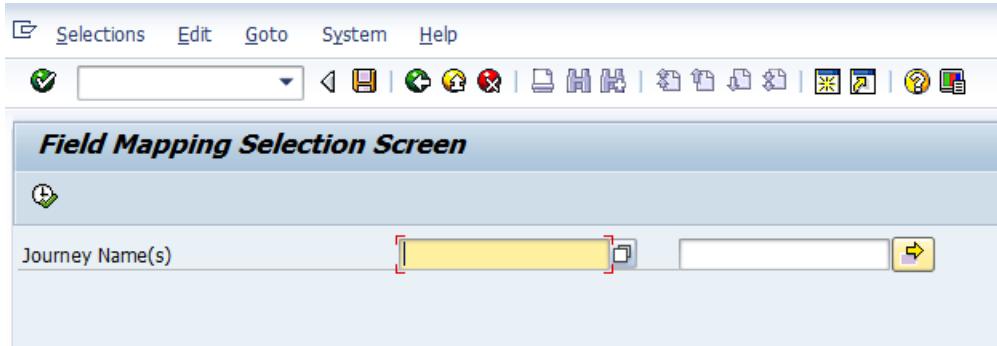

The new combined transaction now brings you to a field mapping selection screen. If you want to view the entire table then you just need to select the **EXECUTE** button to advance to the next screen. If, however, you wish to select all the mappings for a given journey name or group of journeys then the selection screen can be used to select the desired section of the table for viewing and maintenance.

As before you will not be able to change any of the rows that are marked as Standard lines as noted by the check box in the first column. These are entries that are provided as standard configuration and are supplied to the system as part of the configuration transports when you first load the Integration to your system. Lines that are not checked as standard are custom entries configured by you. They can override or add to the standard entries and are of the higher sort order starting with 100000.

Display View "Field Mapping Configuration": Overview															
S Pro...	Journey Name	Sort O...	A	Ro...	Ro...	Cn...	CoCd	Source Base	Source Field	Target Base	Target Field	O	Adjustment	Description	Simple Expression
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_BILL	10	<input checked="" type="checkbox"/>	*	*	*	*	CONSTANT	TRUE	DET_INVOICE	IS_AUDITED	<input type="checkbox"/>	<input type="checkbox"/>	Set IS_AUDITED=True ...	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_BILL	20	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	VBRK-VBELN	DET_INVOICE	INVOICE_NUMBER	<input type="checkbox"/>	<input type="checkbox"/>	SD Billing Document	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_BILL	30	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-BUDAT	DET_INVOICE	FISCAL_DATE	<input type="checkbox"/>	<input type="checkbox"/>	Set Fiscal Date in Audit ...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	100012	<input type="checkbox"/>	*	*	*	*	CONSTANT	0000000001 www	DET_INVOICE	INVOICE_NUMBER	<input type="checkbox"/>	<input type="checkbox"/>	constant	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	701000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-WERKS	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	PLANT-INTSAPEC-1279	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	702000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-MWSKZ	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	TAX CODE-INTSAPEC..	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	703000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-KTOSL	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	ACCOUNT KEY-INTSAP...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	704000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->BKPF-BLART	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	DOC TYPE-INTSAPEC..	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	705000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->BKPF-BELNR	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	FI DOC NUMBER-INTSA...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	706000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->BKPF-XBLNR	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	OFFICIAL INVOICE NUM...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	707000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-MATNR	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	Passing MaterialNumber ...	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_GL	10	<input checked="" type="checkbox"/>	*	*	*	*	CONSTANT	TRUE	DET_INVOICE	IS_AUDITED	<input type="checkbox"/>	<input type="checkbox"/>	Set IS_AUDITED=True ...	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_GL	20	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-BELNR	DET_INVOICE	INVOICE_NUMBER	<input type="checkbox"/>	<input type="checkbox"/>	FI Invoice Number	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_GL	30	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-BUDAT	DET_INVOICE	FISCAL_DATE	<input type="checkbox"/>	<input type="checkbox"/>	Set Fiscal Date in Audit ...	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_GL	40	<input checked="" type="checkbox"/>	*	*	*	*	CONSTANT	AUDIT	DET_INVOICE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	Is Statistical Data	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	100012	<input type="checkbox"/>	*	*	*	*	CONSTANT	AUDIT	DET_INVOICE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	LIV Invoice Number	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	109934	<input type="checkbox"/>	*	*	*	*	SAP_HEADER	RBKPF-BELNR	DET_INVOICE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	PLANT-INTSAPEC-1279	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	701000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-WERKS	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	TAX CODE-INTSAPEC..	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	702000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-MWSKZ	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	ACCOUNT KEY-INTSAP...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	703000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-KTOSL	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	DOC TYPE -INTSAPEC..	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	704000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->BKPF-BLART	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	FI DOC NUMBER-INTSA...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	705000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->BKPF-BELNR	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	OFFICIAL INVOICE NUM...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	706000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->BKPF-XBLNR	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	Passing MaterialNumber ...	
<input type="checkbox"/>	/IDT/JOURNEY_AUDIT_UPD_DB_GL	707000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	BSEG-MATNR	DET_LINE	USER_ELEMENT[NAME..]	<input type="checkbox"/>	<input type="checkbox"/>	Company Role	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_COMPANY_RO...	10	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	CALC_HDR-ROLE	DET_BATCH	COMPANY_ROLE	<input type="checkbox"/>	<input type="checkbox"/>	Company Role	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_COMPANY_RO...	20	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	CALC_HDR-ROLE	DET_INVOICE	COMPANY_ROLE	<input type="checkbox"/>	<input type="checkbox"/>	Authority UUID	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	10	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_UUID	SAP_TAX_LI..	/IDT/UUID	<input type="checkbox"/>	<input type="checkbox"/>	Authority Name - Retur...	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	20	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_NAME	SAP_TAX_LI..	/IDT/AUNA	<input type="checkbox"/>	<input type="checkbox"/>	Fee Amount	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	30	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	FE-AMOUNT	SAP_TAX_LI..	KBETR	<input checked="" type="checkbox"/>	<input type="checkbox"/>	*1000	Tax Rate
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	40	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAX_RATE	SAP_TAX_LI..	KBETR	<input type="checkbox"/>	<input type="checkbox"/>	CURR_RES..	Gross Amount - Authori...
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	50	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	GROSS_AMOUNT-AUTH..	SAP_TAX_LI..	/IDT/GROSS	<input type="checkbox"/>	<input type="checkbox"/>	CURR_RES..	Taxable Basis
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	60	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAXABLE_BASIS-DOCU..	SAP_TAX_LI..	KAWRT	<input type="checkbox"/>	<input type="checkbox"/>	CURR_RES..	Tax Amount
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	70	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAX_AMOUNT-DOCUME..	SAP_TAX_LI..	KWERT	<input type="checkbox"/>	<input type="checkbox"/>	SAP TAX Code	
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	80	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_CURRENC..	SAP_TAX_LI..	WAERS	<input type="checkbox"/>	<input type="checkbox"/>	+3,(3)	SAP Account Key
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	90	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	ERP_TAX_CODE	SAP_TAX_LI..	MWSK1	<input type="checkbox"/>	<input type="checkbox"/>	(2)	Nature of Tax
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	100	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	ERP_TAX_CODE	SAP_TAX_LI..	KVSL1	<input type="checkbox"/>	<input type="checkbox"/>		Tax Direction
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	110	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	NATURE_OF_TAX	SAP_TAX_LI..	/IDT/NOT	<input type="checkbox"/>	<input type="checkbox"/>		Tax Type
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	120	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAX_DIRECTION	SAP_TAX_LI..	/IDT/DOT	<input type="checkbox"/>	<input type="checkbox"/>		ERP Tax Code
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	130	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAX_TYPE	SAP_TAX_LI..	/IDT/TTYP	<input type="checkbox"/>	<input type="checkbox"/>		DATE
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	140	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	ERP_TAX_CODE	SAP_TAX_LI..	/IDT/ETC	<input type="checkbox"/>	<input type="checkbox"/>		Tax Point Date
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_F005_RESPONSE	150	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAX_POINT_DATE	SAP_TAX_LI..	KDATU	<input type="checkbox"/>	<input type="checkbox"/>		

This view allows you to review the preconfigured and delivered mappings provided by Thomson Reuters as well as your custom configuration mappings. This can be helpful when trying to understand a tax result or in building your own mappings. We will explain the different columns and their use in the section below.

The new combined view of the field mapping table also takes advantage of the ALV grid format which is standard within SAP. This provides other standard features by which the user can adjust or copy the table lines and functions as well as the ability to download the table to a spreadsheet document copy on your hard drive. Once you are in the change mode of the table you will see the icons as noted below that can be used to modify/copy the data.

Change View "Field Mapping Configuration": Overview															
New Entries															
S Pro...	Journey Name	Sort O...	A	Ro...	Ro...	Cn...	CoCd	Source Base	Source	Target Base	Target	O	Adjustment	Description	Simple Expression
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_BILL	10	<input checked="" type="checkbox"/>	*	*	*	*	CONSTANT	TRUE			<input type="checkbox"/>	<input type="checkbox"/>		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_BILL	20	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	VBRK-			<input type="checkbox"/>	<input type="checkbox"/>		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_AUDIT_UPD_DB_BILL	30	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-			<input type="checkbox"/>	<input type="checkbox"/>		

As mentioned above this table allows for your own custom mappings as they relate to your company's tax requirements, policy, and compliance needs. Next, we will identify the columns on this table and how they are used to map your desired fields. The [Common Concepts](#) outlined earlier might be helpful when working with the field mapping as well as the [Appendix 2: References](#). For simplification, column fields already discussed in the Common Concepts topic are not included in below table.

COLUMN FIELD	EXPLANATION
Journey Name	You would first establish which journey you want to use for the new mapping. In order to choose the correct journey, you would ask yourself if this field is part of what you want to send via the request data going to Determination, or is it part of the data that will be coming back on the response? Is it data at the header level of a document or is it data stored at the line level? Is this an SD order, billing, PO, L1V invoice, or FI generated document, etc. The journey name column has a drop down so that you can select from the list of possible journeys that are available.
Source Base	This field defines the primary level of where the source data resides, i.e. document or line level in SAP, or invoice, line, and tax level in Determination. There are some special purpose source bases provided too. The drop down allows you to select the appropriate source base and only supplies the list of bases that are applicable to the journey that you selected in the prior column.
Source Field	Here you specify the applicable source fields for the source base. The source fields on the request journey side are the available fields from the SAP tables as listed in the Appendix and all its fields. The response journey represents the Determination tax calculation OUTPUT structure. The source fields drop down first displays the list of tables that are applicable from the prior columns selected. Once you select the table then the list of fields within the table will display for your final selection. Other entries may be possible here if you elect to use the other functionality for constants, calculated fields, and other table driven or user exit examples as explained below.
Target Base	You define what structure the field needs to assign to or retrieved from. When mapping data to Determination you can use all INPUT XML main structures of Batch, Invoice, and Line. When mapping data from the response back to SAP you can map to the Thomson Reuters provided tax data table. The target base field also has a drop-down option with bases displayed according to the prior column fields selected.

Target Field	In this column you specify the applicable target fields for the target base. The target fields on the request journey are Determination Batch, Invoice and Line XML elements. Target fields on the response are based on the tax data table including custom appended fields by the customer. The target field column also has a drop-down selection list based first on the list of tables that are applicable from the prior columns selected. A list of tables will first display and once you select the table then the list of fields within the table will display for your final selection.
Only if Populated Flag (OnlyIfPopu)	Used to support conditional mapping in cases where multiple source fields point to the same Determination target field. See sample below.
Adjustment	Allows for some limited string manipulations and other type of changes to a field. See detailed use cases below.
Simple Expression	Allows for a code expression to be added as a qualifier. Only if the expression is fulfilled the mapping will be considered. See <a href="#">Simple Expressions</a> for details.

## Only if Populated Flag

This column is checked when multiple mappings from different tables are mapped to a single Determination element. This is used so that the highest sort order mapping would not override the lower sort order if that field has a value. The use of this field also provides a type of conditional logic to prevent a NULL value from being mapped to a field.



## Adjustment

This column is used for any kind of adjustments that needs to be done to correct or change the field mapping from one format to another. An example of this is where we use the adjustment column to ignore the first three digits of the **ERP\_Tax\_Code** and use the next three digits to populate the SAP Account key. Another example would be where we need to convert a value to an amount instead of text or convert the format for a date.

Options for the adjustment field include the following:

ADJUSTMENT	EXPLANATION
SIGN	This will reverse the position of the signage, i.e. turn 100- to -100 and vice versa. (100- is valid in SAP but not in Determination.) It moves the SAP negative sign to the right position in the request so Determination can read the value correctly. SIGN should be used for all fields of type amount or quantity in the request. It isn't needed in the response.
CURR_REQ_DOC	This will adjust the document currency amount on a request to Determination: used for amount like fields to adjust to the right currency decimal places based on SAP table V_CURX
CURR_RES_AUTH	This will adjust the authorization currency amount on a response from Determination: used for amount like fields to adjust to the right currency decimal places based on SAP table V_CURX
CURR_RES_DOC	This will adjust the document currency amount on a response from Determination: used for amount like fields to adjust to the right currency decimal places based on SAP table V_CURX
BOOLEAN	This will turn an SAP value of X into a TRUE or '' (null) to FALSE for Determination.
DATE	This is required to turn the Determination date format into the SAP date format.
* (multiplier)	This will multiply the value by the number after the *, i.e. *1000 would convert a Determination tax rate of 0.2 to 200 which then is displayed in SAP as 20.00 %.
String manipulation	Allows for simple string manipulations on a value, i.e. +3, (3) would move to fourth position (offset first 3) and use the next 3 values. So, for an ERP_TAX_CODE returned by Determination of A1-MWS it would only return the value MWS.



When "SIGN" is used with any of the CURR adjustments the sign adjustment must follow the CURR adjustment with a comma separator between them and no spaces.

Display View "Field Mappings: Standard": Overview															
S...	Pr...	Journey Name	Sort ...	A...	R...	R...	C...	CoCd	Source Base	Source Field	Target Base	Target Field	O...	Adjustment	Description
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	10	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_UUID	SAP_TAX_LINE	/IDT/UUID	<input type="checkbox"/>		Authority UUID
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	20	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_NAME	SAP_TAX_LINE	/IDT/UNA	<input type="checkbox"/>		Authority Name - Retu
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	30	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	FEES-AMOUNT	SAP_TAX_LINE	KBETR	<input checked="" type="checkbox"/>	CURR_RES_DOC	Fee Amount
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	40	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAX RATE	SAP_TAX_LINE	KBETR	<input checked="" type="checkbox"/>	*1000	Tax Rate
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	50	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	GROSS_AMOUNT-AUTHOR...	SAP_TAX_LINE	/IDT/GROSS	<input type="checkbox"/>	CURR_RES_AUTH	Gross Amount - Autho
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	60	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAXABLE_BASIS-DOCUM...	SAP_TAX_LINE	KAWRT	<input type="checkbox"/>	CURR_RES_DOC	Taxable Basis
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	70	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	TAX_AMOUNT-DOCUMENT...	SAP_TAX_LINE	KWERT	<input type="checkbox"/>	CURR_RES_DOC	Tax Amount
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	80	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_CURRENCY_...	SAP_TAX_LINE	WAERS	<input type="checkbox"/>	(2)	Authority Currency Co
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	90	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	ERP_TAX_CODE	SAP_TAX_LINE	MWSK1	<input type="checkbox"/>		SAP Tax Code
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_STANDARD_RESPONSE	100	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	FRP_TAX_CODE	SAP_TAX_LINE	XVST1	<input type="checkbox"/>	+3 /3	SAP Account Key

## Calculated Fields

In some cases, the field use isn't based on the exact value in the business process, but rather augmented either via a configuration setting or code. These special fields are necessary due to Determination requirements. The two calculated source bases we use are CALC\_HDR and CALC\_ITEM with the below calculated fields.

HEADER LEVEL	
Source Field	Explanation
CALC_HDR_ROLE	Indicating if this is a Seller or Buyer role, depending on the setup for US specific processing in /N//DT/US_LOGIC
CALC_HDR_EXTERNAL_COMPANY_ID	Usually the SAP Company Code, prepend possible via configuration in /IDT/GEN_CONFIG_VALS
CALC_HDR_UNIQUE_INVOICE_NUMBER	For uniqueness in the Determination audit database this field has to be supplied. It is a concatenation of the Company Code, Document Number, Role, and the Fiscal Year. The values are separated by a pipe value. For example: 2100 0090001798 S 2014

CALC_HDR-CALCULATION_DIRECTION	Indicates whether the tax calculation is based on a “gross_amount” (when blank) or a “gross_amount_plus_tax” (when “T”). It is linked to the Invoice-level field CALCULATION_DIRECTION in the tax engine request message.
CALC_GM_HDR-EXTERNAL_COMPANY_ID	This is linked to a EXTERNAL_COMPANY_ID field at the batch level of the request message. It is a way of linking the tax calculation to a specific company in Determination's configuration.
CALC_GM_HDR-UNIQUE_INVOICE_NUMBER	This field is used within the Goods Movement product to populate the header-level UNIQUE_INVOICE_NUMBER field.

ITEM LEVEL	
Source Field	Explanation
CALC_ITEM_DET_TAX_CODE	Value based on configuration done in /N/IDT/DET_TAX_CODE for the SAP Tax Code processed
CALC_ITEM_IS_EXEMPT	Driven by the configuration in /N/IDT/EXEMPT_SETTINGS or /N/IDT/DET_TAX_CODE
CALC_ITEM_AMOUNT	When calculating tax, the Document Currency is used, but when the audit call is made the Company Code Currency amount will be used to store the tax liability. Additionally, the amount is adjusting for positive or negative scenarios.
CALC_ITEM_QUANTITY	Similar to amounts SAP doesn't use decimal notations for quantities, this value adjust for this.
CALC_ITEM_IS_CREDIT	To account for cancellations, reversals, etc. of an original document in audit the IS_CREDIT flag has to be set to TRUE. When done so the original amounts of the business transaction are reversed by -1.
CALC_ITEM-CREDIT_DEBIT	This field is used to populate item-level USER_ELEMENT ATTRIBUTE44 field. It is populated by the BSEG-SHKZG field from the expense/revenue line.

CALC_ITEM-AMOUNT_PLUS_TAX	This field is used to populate item-level GROSS_PLUS_TAX field. It is populated by the BSEG-WRBTR when the tax is being calculated as "Gross" tax.
CALC_ITEM-ROUTE_NAME	This field is populated by the current Route name and is used to populate the item-level USER_ELEMENT ATTRIBUTE45 field.
CALC_GM_ITEM-IS_CREDIT	This field is used within the Goods Movement product to populate the item-level IS_CREDIT field.
CALC_GM_ITEM-GROSS_AMOUNT	This field is used within the Goods Movement product to populate the item-level GROSS_AMOUNT field.

You can see examples of the use of the calculated field function by looking at the standard field mapping table **/IDT/FIELD\_MAPPING\_V** and searching down the Source Field column of our standard mappings.

## Constants

A constant can be any value not based on business transaction data. For example, to indicate to Determination that a transaction needs to be persisted in the audit database we would need to set the XML field IS\_AUDITED = true. To do so the following mapping can be used (part of standard delivered mapping already).

Display View "Field Mappings: Standard": Overview															
S...	Pr...	Journey Name	Sort ...	A...	R...	R...	C...	CoCd	Source Base	Source Field	Target Base	Target Field	O...	Adjustment	Description
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_BILL	30	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-BUDAT	DET_INVOICE	FISCAL_DATE	<input checked="" type="checkbox"/>		Set Fiscal Date in Audit
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	10	<input checked="" type="checkbox"/>	*	*	*	*	CONSTANT	TRUE	DET_INVOICE	IS_AUDITED	<input type="checkbox"/>		Set IS_AUDITED=True
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	20	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-BELNR	DET_INVOICE	INVOICE_NUMBER	<input type="checkbox"/>		FI Invoice Number
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	30	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-BUDAT	DET_INVOICE	FISCAL_DATE	<input checked="" type="checkbox"/>		Set Fiscal Date in Audit
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_AUDIT_UPD_DB_GL	40	<input checked="" type="checkbox"/>	*	*	*	*	CONSTANT	AUDIT	DET_INVOICE	USER_ELEMENT[NAME=A...	<input checked="" type="checkbox"/>		Is Statistical Data
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FBO5_COMPANY_ROLE	10	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	CALC_HDR-ROLE	DET_BATCH	COMPANY_ROLE	<input checked="" type="checkbox"/>		Company Role
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FBO5_COMPANY_ROLE	20	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	CALC_HDR-ROLE	DET_INVOICE	COMPANY_ROLE	<input checked="" type="checkbox"/>		Company Role
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FBO5_RESPONSE	10	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_UUID	SAP_TAX_LINE	/IDT/UUID	<input type="checkbox"/>		Authority UUID
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_FBO5_RESPONSE	20	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	AUTHORITY_NAME	SAP_TAX_LINE	/IDT/AUNA	<input type="checkbox"/>		Authority Name - Return

By entering the word "CONSTANT" in the source base field the mapping line will then replicate whatever you input in the source field as the value to be populated into the target field. This can be especially powerful and useful when used in combination with a specific route or use of conditional logic in the simple expression column. For a constant the source field can be either upper case, lower case or mixed as in a password, etc.

## Use of a Constant with a Simple Expression

If you desire to have the constant value populated based on the success of a simple expression, we have added additional logic for variables to allow either header or line level fields to be used in the simple expression. (See section below on [Simple Expressions](#) then return to this explanation)

These variables will come from the Journey. In general, the sample expression uses variables defined from the source base.

For example, when using the header journey and the SAP\_HEADER source base the simple expression can contain variables like &KOMK-AUDAT& as in the expression:

```
&KOMK-AUDAT& NE IS_INITIAL
```

This works because &KOMK-AUDAT& is a valid value in the source base.

In the item Journey and the SAP\_ITEM source base the simple expression can contain variables like

```
&VBAP-MATNR& as in the expression:
```

```
&VBAP-MATNR& = 'S-1002'
```

This works because &VBAP-MATNR& is a valid value for each line in the source base. And it can be evaluated for each line in the source base because it works within the looping logic.

When the source base is constant this new logic uses the journey to provide meaning for the variables as in these two expressions when the source base is constant:

For the header journey:

```
&VBAK-XEGDR& NE IS_INITIAL
```

For an item journey:

```
&[ROW=1]HDR>VBAK-XEGDR& EQ IS_INITIAL
```

In both cases the meaning of the variables comes from the journey and not from the source base.

## Table Driven Mappings

In some cases, the Determination tax calculation XSD definition uses complex structures which are represented in the SAP proxy as tables. To handle field mappings for these tables, a more complex approach has to be taken by first defining what table to work with, then to designate the proper field within the table and lastly to assign a value to that field. For example:

```
USER_ELEMENT [NAME=ATTRIBUTE42, CREATE_IF_NOT_EXIST]-VALUE
```

This would map a VALUE to ATTRIBUTE42 in the USER\_ELEMENT structure of the XSD if it doesn't yet already exist. See [Appendix 2: References](#) for more details.

In order to better understand how this works, let us look at a few scenarios.

## Example 1: User Element/Custom Attributes

One of the most commonly used custom field mappings will be for user elements, especially now that Invoice and Line level elements can be used with the Integration. Before we go further let's review what user elements are and how they are used in mappings. A section from the Determination help menu below explains them as Custom Attributes. See below:

### Custom Attributes

If you have transaction data that does not fit into Determination's standard XML elements, you can use special XML elements called custom attributes. These are Input XML elements that you define to match the needs of your implementation. Fifty separate elements are provided at both the Invoice and Line levels, although some are reserved for use by the integration software that links your financial system to ONESOURCE Indirect Tax Determination.

Common uses for custom attributes include:

- Submitting pass-through data for storage in the Audit Database. For example, you might want to store additional location data, contact info, or comments for a transaction that are not supported by the standard set of XML elements.
- Submitting data which can match exemption certificate "limited-use" criteria.
- Submitting data which, when evaluated by TransEditors, can trigger modifications to the Input XML and resulting calculations.
- Submitting data which, when evaluated by Rule Qualifiers, can determine the applicability of a rule to a transaction.

You can learn more about the provided customer attributes by reviewing help documentation within the Determination tax engine.

To map a user element, you follow the following syntax:

Display View "Maintenance view for /IDT/D_FIELD_MAP": Overview													
S...	Journey Name	Sort ...	A...	R...	G...	C...	Source Base	Source Field	Target Base	Target Field	O...	Adjustm...	Description
<input checked="" type="checkbox"/>	/IDT/JOURNEY_NG_NDOC_ITEM_REQ	60	<input checked="" type="checkbox"/>	*	*	*	SAP_ITEM	BSEG-HKONT	DET_LINE	USER_ELEMENT[NAME=ATTRIBUTE42,CREATE_IF_NOT_EXIST]-VALUE	<input checked="" type="checkbox"/>	FI GL ACCOUNT	

The corresponding mapping in the Target Field would be:

USER\_ELEMENT[NAME=ATTRIBUTE42,CREATE\_IF\_NOT\_EXIST]-VALUE

Our target is the VALUE field in the first ROW of the table USER\_ELEMENT. The NAME represents the attribute to be used for the mapping in the range from ATTRIBUTE1 to ATTRIBUTE40 (range 41-50 is reserved by Thomson Reuters). A control flag CREATE\_IF\_NOT\_EXIST can be used to only add the value if none already exists. Finally, we state the target field VALUE to which the data needs to be assigned to.

Below is a resulting line level XML structure sample:

```
<USER_ELEMENT>
  <NAME>ATTRIBUTE42</NAME>
  <VALUE>TA</VALUE>
</USER_ELEMENT>
```

## Example 2: Quantity

We need to provide the quantity sold in SAP to Determination for taxing. The data in the SAP field is KOMP-MGLME which we want to map that to the quantity amount element in Determination.

Maintenance view for /IDT/D_FIELD_MAP													
S...	Journey Name	Sort ...	A...	R...	G...	C...	Source Base	Source Field	Target Base	Target Field	O...	Ad...	Description
<input checked="" type="checkbox"/>	/IDT/JOURNEY_ITEM_REQUEST	50	<input checked="" type="checkbox"/>	*	*	*	SAP_ITEM	KOMP-MGLME	DET_LINE	QUANTITIES-QUANTITY[ROW=1,CREATE_IF_NOT_EXIST]-AMOUNT	<input checked="" type="checkbox"/>		QUANTITY AMOUNT
<input checked="" type="checkbox"/>	/IDT/JOURNEY_ITEM_REQUEST	60	<input checked="" type="checkbox"/>	*	*	*	SAP_ITEM	KOMP-LAGME	DET_LINE	QUANTITIES-QUANTITY[ROW=1,CREATE_IF_NOT_EXIST]-UOM	<input checked="" type="checkbox"/>		QUANTITY UNIT OF MEASURE

To do this we use the target field notation as below:

```
QUANTITIES-QUANTITY[ROW=1,CREATE_IF_NOT_EXIST]-AMOUNT
```

Our target is the AMOUNT field in the first ROW of the table QUANTITIES-QUANTITY. To add our value to the AMOUNT field we must point to that row with the ROW=1 pointer, additionally we can make use of the control flag CREATE\_IF\_NOT\_EXIST to only add the amount value if none already exists. Finally, we state the target field the value needs to be assigned too.

Based on the two mappings in the above picture this would lead to the following data being sent in the line level XML structure for QUANTITIES.

```
<QUANTITIES>
  <QUANTITY>
    <AMOUNT>23</AMOUNT>
    <UOM>EA</UOM>
  </QUANTITY>
```

```
<QUANTITY>  
<AMOUNT>11</AMOUNT>  
<UOM>CTN</UOM>  
</QUANTITY>  
</QUANTITIES>
```

As one can see multiple units of measures can be sent to Determination for evaluation. See the Determination online help topic *Units of Measure Conversion* for more details.

## Example 3: Currency Conversion

Another table-based structure is the CURRENCY\_CONVERSION\_STEPS XML that holds the tax exchange rate date in the response (OUTPUT XML). This field is mapped in our standard already:

Display View "Maintenance view for /IDT/D_FIELD_MAP": Overview											
S...	Journey Name	Sort ...	A...	R...	G...	C...	Source Base	Source Field	Target Base	Target Field	
										O... Adjustm...	
<input checked="" type="checkbox"/>	/IDT/JOURNEY_TAX_TAB_RESPONSE	170	<input checked="" type="checkbox"/>	*	*	*	DET_TAX	CURRENCY_CONVERSION[ROW=1]-TAX_EXCHANGE_RATE_DATE	SAP_TAX_LINE	TAX_EXCH_RATE_DT	<input type="checkbox"/> DATE

The corresponding mapping in the Source Field would be:

CURRENCY\_CONVERSION[ROW=1]-TAX\_EXCHANGE\_RATE\_DATE

In the above example our source field is TAX\_EXCHANGE\_RATE\_DATE, in the table CURRENCY\_CONVERSION. We map to the first value with ROW=1. If there is no ROW in the table, it does not return any value.

Below is a sample tax level XML structure for CURRENCY\_CONVERSION

```
<CURRENCY_CONVERSION>
  <TAX_EXCHANGE_RATE_DATE>2013-11-19
  </TAX_EXCHANGE_RATE_DATE>
</CURRENCY_CONVERSION>
```

## Example 4: Registrations

Another common table-based mapping is for the use of VAT Registration numbers. Please see the [Registration Number Mapping](#) section for details on this subject.

### Pointers

#### HDR->

The HDR-> pointer is used only for request journeys that relate to grouped transactions like creation of a sales order, billing document, or purchase order. This pointer is used in Item level request mapping to indicate that the field used is at header level, i.e. HDR->T001W-WERKS would indicate the plant from the header table to be mapped at the item level. Journeys where the use of the HDR-> pointer would be applicable include:

[/IDT/JOURNEY\\_ITEM\\_REQUEST](#)

Display View "Maintenance view for /IDT/D_FIELD_MAP": Overview											
Maintenance view for /IDT/D_FIELD_MAP		Sort ...	A...	R...	G...	C...	C...	Source Base	Source Field	Target Base	Target Field
S...	Journey Name										O... A
	/IDT/JOURNEY_ITEM_REQUEST	109935	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->T001W-WERKS	DET_LINE	USER_ELEMENT[NAME=ATTRIBUTE2,CREATE_IF_NOT_EXIST]-VALUE

## ANCESTOR->

This solution allows a user to map not only data from the <TAX> block back to SAP, but also from the <LINE> and <INVOICE> level. To do so one would use pointer of **ANCESTOR->** to indicate the position of the field is the next level up. You can string multiple pointers together to point to two levels up, i.e. ANCESTOR->ANCESTOR-> would point to the invoice level.

Display View "Maintenance view for /IDT/D_FIELD_MAP": Overview											
Maintenance view for /IDT/D_FIELD_MAP		Sort ...	A...	R...	G...	C...	C...	Source Base	Source Field	Target Base	Target Field
S...	Journey Name										O... A
	/IDT/JOURNEY_STANDARD_RESPONSE	109002	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	ANCESTOR->ANCESTOR->CALLING_SYSTEM_NUMBER	SAP_TAX_LINE	/IDI/UUID
	/IDI/JOURNEY_TAX_TAB_RESPONSE	109002	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	ANCESTOR->ANCESTOR->CALLING_SYSTEM_NUMBER	SAP_TAX_LINE	AUTHORITY_UUID

Pointer used in response mapping to indicate that the field used is at a higher level in the structure, i.e. ANCESTOR->ANCESTOR->CALLING\_SYSTEM\_NUMBER would be used to map from an invoice level field in the tax data level.



Level 1 would be the <BATCH>

Level 2 would be the <INVOICE>

Level Level 3 would be the <LINE>

Level Level 4 would be the <TAX> block Level

We are not supporting the BATCH level at this time; all relevant fields are also available at the INVOICE level.

## ITEMS->

The ITEMS-> pointer is used for request journeys in header and item user exits.

As an example, this feature could be used in the following two scenarios:

1. If you need to determine at the header level a field that is stored at the line-item level to pass that to the request.

2. If you want to look at a line that is a consequence of another line like a freight charge or surcharge and you need to refer to the parent line to get some information needed to properly calculate tax on the related child line.

To accomplish either of these scenarios via ABAP programming, you can use this new field in the header called “Items”. This Items field is a pointer that allows you to get the item data needed for the above two purposes. It increases the function of the user exit and simple expressions to use for some fringe cases where this may be needed. You may never need this, but it is available if needed.

This is used by an ABAP programmer creating a field mapping user exit that they would then populate into the field mapping table.

See the *Installation and Programmers Guide* section “*User-Exit in Field Mapper*” for an example on how to use this new feature.

## Simple Expressions

Simple expressions are just like a line of code, but they are added to the field mapping line as a qualifier, only if the expression is fulfilled the mapping will be considered.

/IDT/JOURNEY_STANDARD_RESPONSE	250	/IDT/INVTX	JURISDICTION TEXT FOR TAX TYPES AS IN EXPRESSION	INL_RC_TR_ZE_ZC' CS &TAX_TYPE&
--------------------------------	-----	------------	--	--------------------------------

The syntax of a simple expression is as follows:

Source Field | Operand | Check Value (Field)

Some requirements are:

- SAP table-field names must always be wrapped with ampersands (&)
- Values must always be wrapped with single quotes (')
- Operations can be stringed together by AND or OR commands

- Supported operands are:

- EQ, = Equal To
- NE, <>, >< Not Equal To
- LT, < Less Than
- LE, <= Less Than or Equal To
- GT, > Greater Than
- GE, >= Greater than or Equal To
- CO Contains Only
- CN Contains Not only
- CA Contains Any
- NA Contains Not Any
- CS Contains String
- NS Contains No String
- CP Matches Pattern
- NP Does Not Match Pattern
- IS\_INITIAL Field is initial value



IS\_INITIAL is a special command that can be used with EQ or NE to further delineate if a field has been populated or if it has been set to the initial value of blank for this transaction.

Date fields however cannot use IS\_INITIAL because the original value stored in SAP is not blank for date formats but instead is initially formatted as '00000000'. If you are mapping for a date field use the example below where the date field is not equal to '00000000'. We recommend you use this format and not activate the "only if populated" flag.

Display View "Field Mappings: Standard": Overview																
S...	Pr...	Journey Name	Sort ...	A...	R...	R...	C...	CoCd	Source Base	Source Field	Target Base	Target Field	O...	A...	Description	Simple Expression
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQUEST	220	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	KOMK-PRSDT	DET_INVOICE	INVOICE_DATE	<input type="checkbox"/>		MM Invoice Date	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQUEST	230	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	KOMK-AUDAT	DET_INVOICE	INVOICE_DATE	<input type="checkbox"/>		SD Invoice Date	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQUEST	240	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	BKPF-BLDAT	DET_INVOICE	INVOICE_DATE	<input type="checkbox"/>		FI Invoice Date	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQUEST	250	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	KOMK-FBUDA	DET_INVOICE	MOVEMENT_DATE	<input type="checkbox"/>		Movement Date	
<input checked="" type="checkbox"/>	GN	/IDT/JOURNEY_HEADER_REQUEST	260	<input checked="" type="checkbox"/>	*	*	*	*	SAP_HEADER	KOMK-BELNR	DET_INVOICE	INVOICE_NUMBER	<input type="checkbox"/>		Invoice Number	

Other example for operands listed above:

EXPRESSION	EXPLANATION
&KOMK-VKBUR& = '1030'	Only maps the field if the Sales Office value is 1030.
&VBAK-ERDAT& NE &SY-DATUM&	Only uses the mapping if the system date isn't the same as the documents create date.
( &KOMK-WAERK& = 'USD' and &VBAK-ERDAT& = &SY-DATUM& ) OR &SY-TCODE& CP 'VA'	Maps the field if the Document Currency is USD and the Document Create date is the system date OR if the transaction code starts with the letters "VA"
'NL_RC_TR_ZE_ZC' CS &TAX_TYPE&	Only uses the mapping of the Tax Type contains any of these values: NL, RC, TR, ZE, or ZC.

## User-Exit Based Field Mapping

The Field Mapping allows dynamic mapping of SAP source fields to Determination and vice versa. In most cases the options of doing mappings by journey, routes, route groups, country groups, or company code are enough to meet most customer requirements; especially in combination with the Simple Expression feature that allows for some ABAP syntax to be added in the mapper directly. However, in some complex situations, or when the Thomson Reuters provided source bases aren't covering a table required for a custom mapping, a customer might implement a user-exit based mapping. How to program a user-exit based field mapping see the *Installation and Programmers Guide* section "User-Exit in Field Mapper".

## Proxy Column for Tandem Use of On-Premise Determination and Cloud 2018.3 Determination

If you are only using an on-premise version of Determination, then you can skip this topic. It will not apply to your mappings.

With the release of Determination Cloud 2018.3, there were about 30 new fields that were created and new functions and content to support Oil and Gas customers. This addition is not going to be added to the on-premise version and thus creates some issues with two different XSD structures within the WSDL and proxy(s). Because the field mapping table uses dynamically generated code for each of the journeys, the WSDL version, if not selected correctly for the program, will cause a system ST22 error. We have added an additional column to the field mapper. It directs the mapping line to the correct proxy and XML structure, if the proxy field is populated with the proxy group code that is used exclusively for that mapping field.

If you are using the new Cloud Determination 2018.3 and above, AND you are using some of these new fields, then you will have to populate the proxy group code "CL" relating to Determination 2018.3, for the given line-item. If you are not using any of the new fields in 2018.3 and/or are NOT using the Cloud Determination, then you will NOT need to be concerned with this field. If the field is left blank on the mapping, then the line will apply to either WSDL. A code for the on-premise proxy "OP" in the field is used for fields that are only available in the on-premise proxy. See Proxy table configuration instructions for more information.

CALLER_JOURNEY_HEADER_REQUEST	CCCC401	DRY_HEADER	NUFA_NUMBER	DET_INVOICE	CALLER_JOURNEY_HEADER	UNLINKED_INVOICE	Cloud Proxy Test for Inv.	CL
/DT/JOURNEY_HEADER_REQUEST	444401	*	CONSTANT	444401	DET_INVOICE	USER_ELEMENT_AMOUNT[NAME=AMOUNT_ATTRIBUTE1,CREATE_IF_NOT_EXIST]VA	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444402	*	CONSTANT	444402	DET_INVOICE	USER_ELEMENT_AMOUNT[NAME=AMOUNT_ATTRIBUTE2,CREATE_IF_NOT_EXIST]VA	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444403	*	CONSTANT	444403	DET_INVOICE	USER_ELEMENT_AMOUNT[NAME=AMOUNT_ATTRIBUTE3,CREATE_IF_NOT_EXIST]VA	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444404	*	CONSTANT	444404	DET_INVOICE	USER_ELEMENT_AMOUNT[NAME=AMOUNT_ATTRIBUTE4,CREATE_IF_NOT_EXIST]VA	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444405	*	CONSTANT	444405	DET_INVOICE	USER_ELEMENT_AMOUNT[NAME=AMOUNT_ATTRIBUTE5,CREATE_IF_NOT_EXIST]VA	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444406	*	CONSTANT	2018-05-21	DET_INVOICE	USER_ELEMENT_DATE[NAME=DATE_ATTRIBUTE1,CREATE_IF_NOT_EXIST]VALUE	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444407	*	CONSTANT	2018-05-22	DET_INVOICE	USER_ELEMENT_DATE[NAME=DATE_ATTRIBUTE2,CREATE_IF_NOT_EXIST]VALUE	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444408	*	CONSTANT	2018-05-23	DET_INVOICE	USER_ELEMENT_DATE[NAME=DATE_ATTRIBUTE3,CREATE_IF_NOT_EXIST]VALUE	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444409	*	CONSTANT	2018-05-24	DET_INVOICE	USER_ELEMENT_DATE[NAME=DATE_ATTRIBUTE4,CREATE_IF_NOT_EXIST]VALUE	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444410	*	CONSTANT	2018-05-25	DET_INVOICE	USER_ELEMENT_DATE[NAME=DATE_ATTRIBUTE5,CREATE_IF_NOT_EXIST]VALUE	✓	CL
/DT/JOURNEY_HEADER_REQUEST	444444	*	CONSTANT	true	DET_INVOICE	IS_EXCHANGE	Cloud Proxy Test for Inv.	CL
/DT/JOURNEY_HEADER_REQUEST	444449	*	CONSTANT	true	DET_INVOICE	USER_ELEMENT[NAME=ATTRIBUTE40,CREATE_IF_NOT_EXIST]VALUE	✓	CL
/DT/JOURNEY_HEADER_REQUEST	355555	*	CONSTANT	OR	DET_INVOICE	USER_ELEMENT[NAME=ATTRIBUTE29,CREATE_IF_NOT_EXIST]VALUE	✓	OP

Example of new proxy column of field mapping table being used on a mapping for new fields in Determination 2018.3

### Important Note on Field Mapping Errors

If you are doing a field mapping or address mapping and then encounter a program dump error screen this is because you have mapped an incorrect combination of journey, route, and source/target field in the mapping line. If you encounter this program dump you can simply check off the "Active" flag on the mapping line and repeat your process. If you do not get a program dump after the active flag is unchecked, then you know you have identified the culprit mapping line that is causing the problem. Once the line in question is identified you can investigate what the error situation is and how to fix it.

The error that will occur for an incorrect field mapping will now create an ST22 error that will be available for you to view. If the error occurs before the document is posted to the G/L then the dump error screen will pop-up and show you the error immediately. If the error happens in the call to the audit journey, then the error will not be a short dump that prevents the entry from posting to G/L and you will instead see a pop-up termination error. If that happens then double click on the pop-up error and it will tell you to go to transaction code ST22 to further review the error. Once you find the error on the ST22 transaction screen you will see within the error a message that tells you which journey and sort order line in the field mapping caused the issue. You will then need to correct this field mapping line to prevent the error. Example shown below:

**Runtime Error - Description of Exception**

Long Text Debugger

Category	ABAP Programming Error
Runtime Errors	MESSAGE_TYPE_X
ABAP Program	/IDT/DYNAMIC_BASE_MAP_CODE====CP
Application Component	Not Assigned
Date and Time	09/02/2016 16:22:31

**Short text**  
The current application triggered a termination with a short dump.

**What happened?**  
The current application program detected a situation which really should not occur. Therefore, a termination with a short dump was triggered on purpose by the key word MESSAGE (type X).

**Error analysis**

Short text of error message:  
Error in field mapping 888888 for journey /IDT/JOURNEY\_HEADER\_REQUEST. The data object "<M\_DET\_INVOICE>" does not have a component called "BLAH\_LAHLAH".

Long text of error message:  
Technical information about the message:  
Message class..... "/IDT/INTEGRATION"  
Number..... 006  
Variable 1..... 888888  
Variable 2..... "/IDT/JOURNEY\_HEADER\_REQUEST"  
Variable 3..... "The data object "<M\_DET\_INVOICE>" does not have a component called "BLAH\_LAHLAH"."  
Variable 4..... "

**Trigger Location of Runtime Error**

Program	/IDT/DYNAMIC_BASE_MAP_CODE====CP
Include	/IDT/DYNAMIC_BASE_MAP_CODE====CM00M
Row	45
Module type	(METHOD)
Module Name	CHECK_SOURCE_CODE

**Source Code Extract**

Line	SourceCde
	15

## Miscellaneous Field Mapping Notes:

The following section is for miscellaneous Field Mapping notes or help topics:

### Mapping for Ship-to Customer Name and Number

Following mapping example may be helpful if you are using the ship-to partner function and changing the customer number at the line-item level for partner function. This mapping will bring in this ship-to partner into the output line-item level.

<input type="checkbox"/> /IDT/JOURNEY_ITEM_REQUEST	100023	<input checked="" type="checkbox"/> SA	*	*	*	SAP_ITEM	PARTNER_TAB[PARVW=WE]KNA1-KUNNR	DET_LINE	CUSTOMER_NUMBER	<input checked="" type="checkbox"/>	Ship-to Customer- SO at line level(e.g exemption)
<input type="checkbox"/> /IDT/JOURNEY_ITEM_REQUEST	100024	<input checked="" type="checkbox"/> BL	*	*	*	SAP_ITEM	PARTNER_TAB[PARVW=WE]KNA1-KUNNR	DET_LINE	CUSTOMER_NUMBER	<input checked="" type="checkbox"/>	Ship-toCustomer-Billing at line level(e.g exemption)

<input type="checkbox"/> /IDT/JOURNEY_ITEM_REQUEST	100027	<input checked="" type="checkbox"/> SA	*	*	*	SAP_ITEM	PARTNER_TAB[PARVW=WE]KNA1-NAME1	DET_LINE	CUSTOMER_NAME	<input checked="" type="checkbox"/>	Ship-to CustomerNameSO at line level(e.g exemption)
<input type="checkbox"/> /IDT/JOURNEY_ITEM_REQUEST	100028	<input checked="" type="checkbox"/> BL	*	*	*	SAP_ITEM	PARTNER_TAB[PARVW=WE]KNA1-NAME1	DET_LINE	CUSTOMER_NAME	<input checked="" type="checkbox"/>	Ship-toCustomerName-Billing inleve(e.g exemption)

## Address Mapping

The Address Mapping could be considered a “cousin” of the Field Mapping in that it functions much like the field mapping logic however it relates solely to the function of address and registrations. As of the 6.4.4.0 release the address mapping table has been improved to allow a user to easily add via mapping, new fields to the address logic as well as a source address mapping. These two new tables are designed to make available logic that was in prior releases, part of the class that was behind the address source logic. Now instead of hidden within the program, the fields and logic are available for users to easily adjust as needed. This change was in response to the new field additions within the Cloud Determination 2018.3 release for new XML fields for Oil and Gas customers.

If you are not taking advantage of the Oil and Gas fields in Cloud Determination you will not be forced into converting your custom address sources over to this new table function and will not be required to populate these new tables unless you choose to do so for new customizations or to make visible your current address source classes. The new logic and table usage is placed in the program after our standard logic and the prior class has not been removed. The program will access the old class program logic and then augment it with the new table mappings we describe below if they are populated for the given address source.

### Field Mapping for Address Journey

This is covered in the current field mapping table for JOURNEY\_ADDRESSES. This journey provides a way to add new attribute fields to the address that are used within the various address sources. It maps /IDT/JOURNEY\_ADDRESSES using the base logic within GN\_ADDRESSES to the fields that are available within the Determination list of mappable address target fields. In prior releases this mapping was done behind the scenes within the address\_journey class, which means all those address fields were hard coded there hence to add new fields we would have need to change the program. Now the mapping and other functions have been exposed to users so they can easily add new fields to the address sources and types as needed. This is helpful for customers that need to add new data for Oil & Gas usage in Determination 2018.3 and above.

Transaction Code: **/IDT/FIELD\_MAP\_NEW** - Field Mappings

Display View "Field Mapping Configuration": Overview																
S... Pr...	Journey Name	Sort Or...	A...	Ro...	Ro...	Cn...	CoCd	Source Base	Source Field	Target Base	Target Field	O...	Adjustment	Description	Simple Expression	Pr...
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	10	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	COUNTRY	DET_ADDRESS	COUNTRY	<input type="checkbox"/>		Country		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	20	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	PROVINCE	DET_ADDRESS	PROVINCE	<input type="checkbox"/>		Province		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	30	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	STATE	DET_ADDRESS	STATE	<input type="checkbox"/>		State		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	40	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	COUNTY	DET_ADDRESS	COUNTY	<input type="checkbox"/>		County		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	50	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	CITY	DET_ADDRESS	CITY	<input type="checkbox"/>		City		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	60	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	DISTRICT	DET_ADDRESS	DISTRICT	<input type="checkbox"/>		District		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	70	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	POSTCODE	DET_ADDRESS	POSTCODE	<input type="checkbox"/>		Postcode		
<input checked="" type="checkbox"/>	GN /IDT/JOURNEY_ADDRESSES	80	<input checked="" type="checkbox"/>	*	*	*	*	GN_ADDRESS	GEOCODE	DET_ADDRESS	GEOCODE	<input type="checkbox"/>		Geocode		
	GN /IDT/JOURNEY_ADDRESSES							GN_ADDRESS	COUNTRY	DET_ADDRESS	COUNTRY					

## Address Source Mapping

Transaction Code: **/IDT/ADDR\_FIELD\_MAP** - Address Source Field Mappings

This new mapping table exposes to the customer mappings that were part of the class that was attached to the address source. You can see in the example below that it maps the address source or partner function to the target field in the Integration. The table is populated with all the standard mappings that are required and would normally not need to be appended with custom mappings unless the customer has created a new custom address source or has added new fields to the address sources as needed for Oil & Gas customers, etc.

Source\_field determines from where address needs to be collected (SADDRVB or ADRC tables). F4 on this field displays other tables and their fields can be mapped but logically that are not address related tables/fields and hence are not useful for us.

This ALV program can be used in the same fashion as a normal field mapping program which includes maintaining adjustments and simple expressions.

For example – simple expressions and adjustments maintained in the standard mapping for partner functions.

Display View "Address Source Field Mapping Configuration" Overview																		
S...	Pr...	Address Source	Fu...	Sort Or...	A...	Ro...	Ro...	Cn...	CoCd	Source Base	Source Field	Target Base	Target Field	O...	Adjustment	Description	Simple Expression	Pr...
<input checked="" type="checkbox"/>	GN		*	10	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-LAND1	GN_ADDRESS	COUNTRY	<input type="checkbox"/>		Partner Function - Country	&SADRVB-LAND1& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	20	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-REGIO	GN_ADDRESS	PROVINCE	<input type="checkbox"/>		Partner Function - Province	&SADRVB-LAND1& NE 'US' AND &SADRVB-REGIO& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	30	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-REGIO	GN_ADDRESS	STATE	<input type="checkbox"/>		Partner Function - State	&SADRVB-LAND1& EQ 'US' AND &SADRVB-REGIO& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	40	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-ORT02	GN_ADDRESS	COUNTY	<input type="checkbox"/>		Partner Function - County	&SADRVB-LAND1& EQ 'US' AND &SADRVB-ORT02& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	50	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-ORT01	GN_ADDRESS	CITY	<input type="checkbox"/>		Partner Function - City	&SADRVB-ORT01& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	60	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-ORT02	GN_ADDRESS	DISTRICT	<input type="checkbox"/>		Partner Function - District	&SADRVB-LAND1& NE 'US' AND &SADRVB-ORT02& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	70	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-PSTLZ	GN_ADDRESS	POSTCODE	<input type="checkbox"/>	(5)	Partner Function - Post Code	&SADRVB-LAND1& EQ 'US' AND &SADRVB-PSTLZ& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	71	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-PSTLZ	GN_ADDRESS	POSTCODE	<input type="checkbox"/>		Partner Function - Post Code	&SADRVB-LAND1& NE 'US' AND &SADRVB-PSTLZ& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	80	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-PSTLZ	GN_ADDRESS	GEOCODE	<input type="checkbox"/>	+6,(4)	Partner Function - Geocode	&SADRVB-LAND1& EQ 'US' AND &SADRVB-PSTLZ& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	110	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-COUNTRY	GN_ADDRESS	COUNTRY	<input type="checkbox"/>		Partner Function - Country	&ADRC-COUNTRY& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	120	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-REGION	GN_ADDRESS	PROVINCE	<input type="checkbox"/>		Partner Function - Province	&ADRC-COUNTRY& NE 'US' AND &ADRC-REGION& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	130	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-REGION	GN_ADDRESS	STATE	<input type="checkbox"/>		Partner Function - State	&ADRC-COUNTRY& EQ 'US' AND &ADRC-REGION& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	140	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY2	GN_ADDRESS	COUNTY	<input type="checkbox"/>		Partner Function - County	&ADRC-COUNTRY& EQ 'US' AND &ADRC-CITY2& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	150	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY1	GN_ADDRESS	CITY	<input type="checkbox"/>		Partner Function - City	&ADRC-CITY1& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	160	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY2	GN_ADDRESS	DISTRICT	<input type="checkbox"/>		Partner Function - District	&ADRC-COUNTRY& NE 'US' AND &ADRC-CITY2& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN		*	170	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-POST_COD...	GN_ADDRESS	POSTCODE	<input type="checkbox"/>	(5)	Partner Function - Post Code	&ADRC-COUNTRY& EQ 'US' AND &ADRC-POST_CODE& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN	*	*	171	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-POST_COD...	GN_ADDRESS	POSTCODE	<input type="checkbox"/>		Partner Function - Post Code	&ADRC-COUNTRY& NE 'US' AND &ADRC-POST_CODE& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN	*	*	180	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-POST_COD...	GN_ADDRESS	GEOCODE	<input type="checkbox"/>	+6,(4)	Partner Function - Geocode	&ADRC-COUNTRY& EQ 'US' AND &ADRC-POST_CODE& IS NOT INITIAL		
<input checked="" type="checkbox"/>	GN BUSINESS PLACE		*	10	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-COUNTRY	GN_ADDRESS	COUNTRY	<input type="checkbox"/>		Business Place - Country	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN BUSINESS PLACE		*	20	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-REGION	GN_ADDRESS	PROVINCE	<input type="checkbox"/>		Business Place - Province	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN BUSINESS PLACE		*	50	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY1	GN_ADDRESS	CITY	<input type="checkbox"/>		Business Place - City	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN BUSINESS PLACE		*	60	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY2	GN_ADDRESS	DISTRICT	<input type="checkbox"/>		Business Place - District	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN BUSINESS PLACE		*	71	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-POST_COD...	GN_ADDRESS	POSTCODE	<input type="checkbox"/>		Business Place - Post Code	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	10	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-COUNTRY	GN_ADDRESS	COUNTRY	<input type="checkbox"/>		Company Code - Country	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	20	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-REGION	GN_ADDRESS	PROVINCE	<input type="checkbox"/>		Company Code - Province	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	30	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-REGION	GN_ADDRESS	STATE	<input type="checkbox"/>		Company Code - State	&ADRC-COUNTRY& EQ 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	40	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY2	GN_ADDRESS	COUNTY	<input type="checkbox"/>		Company Code - County	&ADRC-COUNTRY& EQ 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	50	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY1	GN_ADDRESS	CITY	<input type="checkbox"/>		Company Code - City	&ADRC-COUNTRY& EQ 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	60	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-CITY2	GN_ADDRESS	DISTRICT	<input type="checkbox"/>		Company Code - District	&ADRC-COUNTRY& EQ 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	70	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-POST_COD...	GN_ADDRESS	POSTCODE	<input type="checkbox"/>	(5)	Company Code - Post Code	&ADRC-COUNTRY& EQ 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	71	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-POST_COD...	GN_ADDRESS	POSTCODE	<input type="checkbox"/>		Company Code - Post Code	&ADRC-COUNTRY& NE 'US'		
<input checked="" type="checkbox"/>	GN COMPANY CODE		*	80	<input checked="" type="checkbox"/>	*	*	*	*	ADRC-POST_COD...	GN_ADDRESS	GEOCODE	<input type="checkbox"/>	+6,(4)	Company Code - Geocode	&ADRC-COUNTRY& EQ 'US'		
<input checked="" type="checkbox"/>	110090	SET_ADDRESS_HDR_LV								ADRC-CITY1	GN_ADDRESS	CITY	<input type="checkbox"/>					
<input checked="" type="checkbox"/>	GN COST CENTER		*	10	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-LAND1	GN_ADDRESS	COUNTRY	<input type="checkbox"/>		Cost Center - Country			
<input checked="" type="checkbox"/>	GN COST CENTER		*	20	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-REGIO	GN_ADDRESS	PROVINCE	<input type="checkbox"/>		Cost Center - Province	&SADRVB-LAND1& NE 'US'		
<input checked="" type="checkbox"/>	GN COST CENTER		*	30	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-REGIO	GN_ADDRESS	STATE	<input type="checkbox"/>		Cost Center - State	&SADRVB-LAND1& EQ 'US'		
<input checked="" type="checkbox"/>	GN COST CENTER		*	40	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-ORT02	GN_ADDRESS	COUNTY	<input type="checkbox"/>		Cost Center - County	&SADRVB-LAND1& EQ 'US'		
<input checked="" type="checkbox"/>	GN COST CENTER		*	50	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-ORT01	GN_ADDRESS	CITY	<input type="checkbox"/>		Cost Center - City			
<input checked="" type="checkbox"/>	GN COST CENTER		*	60	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-ORT02	GN_ADDRESS	DISTRICT	<input type="checkbox"/>		Cost Center - District	&SADRVB-LAND1& NE 'US'		
<input checked="" type="checkbox"/>	GN COST CENTER		*	70	<input checked="" type="checkbox"/>	*	*	*	*	SADRVB-PSTLZ	GN_ADDRESS	POSTCODE	<input type="checkbox"/>	(5)	Cost Center - Post Code	&SADRVB-LAND1& EQ 'US'		

## Address Mapping Table

A new Combined View with default mappings has been provided.

Transaction Code: /IDT/ADDRESS\_MAP\_NEW

Route Name(s)	<input type="button" value="Search"/>
---------------	---------------------------------------

When you first select the new transaction code you will see the selection screen which allows you to select portions of the table by entering a given route or set of routes using the multiple selection options.

To get the full set of the address mappings table including both standard lines and customer created lines you can just hit **EXECUTE** to get the full table listing.

Display View "Address Mapping Configuration": Overview													
S	Pr...	Route Name	Logical Address Type	Sort O...	A	Cn...	CoCd	Address Source	Fu...	B...	S...	M	Description
		GN /IDT/ROUTE_GROUP_BILLING_GEN	SHIP_FROM	10	<input checked="" type="checkbox"/>	*	*	PLANT		<input type="checkbox"/>	<input type="checkbox"/>		Plant-Ship From
		GN /IDT/ROUTE_GROUP_BILLING_GEN	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>		Ship To Party-Ship To
		GN /IDT/ROUTE_GROUP_BILLING_GEN	SUPPLY	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>		Ship To Party-Supply for Services
		GN /IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Seller Primary&Seller Registration
		GN /IDT/ROUTE_GROUP_BILLING_GEN	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*		SP	<input checked="" type="checkbox"/>	<input type="checkbox"/>		Sold To Party-Buyer Primary&Buyer Registration
		GN /IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	20	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>		Brazil Business Place
		/IDT/ROUTE_GROUP_BILLING_GEN	BUYER_PRIMARY	111110	<input checked="" type="checkbox"/>	BR	*	LIV OVERRIDE ADDRESS		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Seller Primary&Seller Registration
		/IDT/ROUTE_GROUP_BILLING_GEN	BUYER_PRIMARY	111111	<input type="checkbox"/>	BR	*	LIV OVERRIDE ADDRESS		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Seller Primary&Seller Registration
		/IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	111111	<input type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input checked="" type="checkbox"/>		Company Code-Seller Primary&Seller Registration
		/IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	555555	<input type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input checked="" type="checkbox"/>		Company Code-Seller Primary&Seller Registration
		GN /IDT/ROUTE_GROUP_BILLING_PA	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Buyer Primary & Buyer Registration
		GN /IDT/ROUTE_GROUP_BILLING_PA	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Seller Primary & Seller Registration
		GN /IDT/ROUTE_GROUP_BILLING_PA	SHIP_FROM	10	<input checked="" type="checkbox"/>	*	*	PLANTS ABROAD SUPPLYING PLANT		<input type="checkbox"/>	<input type="checkbox"/>		PA Supplying Plant-Ship From
		GN /IDT/ROUTE_GROUP_BILLING_PA	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>		Ship To Party-Ship To
		/IDT/ROUTE_GROUP_BILLING_PA	ORDER_ACCEPTANCE	111111	<input type="checkbox"/>	*	*	PLANT		<input type="checkbox"/>	<input type="checkbox"/>		test
		GN /IDT/ROUTE_GROUP_DELIVERY	SUPPLY	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>		Ship To-Supply for Services
		GN /IDT/ROUTE_GROUP_DELIVERY	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>		Ship To Party-Ship To
		GN /IDT/ROUTE_GROUP_DELIVERY	SHIP_FROM	10	<input checked="" type="checkbox"/>	*	*	SHIPPING POINT		<input type="checkbox"/>	<input type="checkbox"/>		Shipping Point-Ship From
		GN /IDT/ROUTE_GROUP_DELIVERY	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Seller Primary & Seller Registration
		GN /IDT/ROUTE_GROUP_DELIVERY	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*		SH	<input checked="" type="checkbox"/>	<input type="checkbox"/>		Ship To Party-Buyer Primary & Buyer Registration
		GN /IDT/ROUTE_GROUP_DELIVERY	SELLER_PRIMARY	20	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>		Brazil Business Place
		/IDT/ROUTE_GROUP_DELIVERY	SELLER_PRIMARY	100001	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>		Brazil Business Place
		/IDT/ROUTE_GROUP_DELIVERY	BUYER_PRIMARY	100002	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>		Brazil Business Place
		GN /IDT/ROUTE_GROUP_PURCHASING	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Buyer Primary & Buyer Registration
		GN /IDT/ROUTE_GROUP_PURCHASING	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*		VN	<input type="checkbox"/>	<input type="checkbox"/>		VendorPartnerFunc-SellerPrimary&SellerRegistration
		GN /IDT/ROUTE_GROUP_PURCHASING	SHIP_FROM	10	<input checked="" type="checkbox"/>	*	*		VN	<input type="checkbox"/>	<input type="checkbox"/>		Vendor Partner-Function-Ship From
		GN /IDT/ROUTE_GROUP_PURCHASING	SUPPLY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Supply-If no Cost Center & Plant
		GN /IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>		Company Code-Ship To-If no Cost Center & Plant
		GN /IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	20	<input checked="" type="checkbox"/>	*	*	PLANT		<input type="checkbox"/>	<input type="checkbox"/>		Plant-Ship To-If no Cost Center
		GN /IDT/ROUTE_GROUP_PURCHASING	SUPPLY	20	<input checked="" type="checkbox"/>	*	*	PLANT		<input type="checkbox"/>	<input type="checkbox"/>		Plant-Supply-If no Cost Center
		GN /IDT/ROUTE_GROUP_PURCHASING	BUYER_PRIMARY	20	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>		Brazil Business Place
		GN /IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	30	<input checked="" type="checkbox"/>	*	*	COST CENTER		<input type="checkbox"/>	<input type="checkbox"/>		Cost Center-Ship To
		GN /IDT/ROUTE_GROUP_PURCHASING	SUPPLY	30	<input checked="" type="checkbox"/>	*	*	COST CENTER		<input type="checkbox"/>	<input type="checkbox"/>		Cost Center-Supply
		GN /IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	40	<input checked="" type="checkbox"/>	*	*	WBS ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>		ShipTo-WBS Element
		GN /IDT/ROUTE_GROUP_PURCHASING	SUPPLY	40	<input checked="" type="checkbox"/>	*	*	WBS ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>		ShipTo-WBS Element
		GN /IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	50	<input checked="" type="checkbox"/>	*	*	NETWORK ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>		ShipTo-Network Elemt
		GN /IDT/ROUTE_GROUP_PURCHASING	SUPPLY	50	<input checked="" type="checkbox"/>	*	*	NETWORK ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>		ShipTo-Network Elemt
		GN /IDT/ROUTE_GROUP_PURCHASING	SUPPLY	60	<input checked="" type="checkbox"/>	*	*	INTERNAL ORDER		<input type="checkbox"/>	<input type="checkbox"/>		ShipTo-InternalOrder
		GN /IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	60	<input checked="" type="checkbox"/>	*	*	INTERNAL ORDER		<input type="checkbox"/>	<input type="checkbox"/>		ShipTo-InternalOrder
		/IDT/ROUTE_GROUP_PURCHASING	SELLER_PRIMARY	100001	<input type="checkbox"/>	*	*	VENDOR		<input type="checkbox"/>	<input checked="" type="checkbox"/>		Taiwan business place
		/IDT/ROUTE_GROUP_PURCHASING	BUYER_PRIMARY	100001	<input type="checkbox"/>	*	*	4200 BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>		

Here you can maintain your own address mappings or augment existing ones. You can also define alternate registration sources, other than what is pre-delivered. See the "Registration Number Mapping" topic for more details.

Explanation of the columns in the address mapping table:

COLUMN	EXPLANATION
Logical address type	In this column you specify one of the logical address types that are listed in the standard delivery /N/IDT/ADDRESS_TYPES_V, it represents Determination target address structure.

COLUMN	EXPLANATION
Address source	Defines the applicable address source within SAP.  NOTE: Address Source can't be used at the same time as the Partner Function column (Funct)
Function (Funct)	This column is a drop-down list of applicable partner functions from SAP Table TPAR and can be used to map your address instead of one of the address sources described prior.  NOTE: Address Source can't be used at the same time as the Partner Function column (Funct)
VAT Registration number check boxes	The three columns of check boxes are used to indicate the target mapping for Buyer, Seller, or Middleman VAT Registrations.



Integration will always provide a list of registration numbers based on the primary registration and the foreign registrations maintained on the source master record. For foreign registrations we select the ones that match the countries represented across all address sources used in the business process.



There are no default mappings provided for ORDER\_ORIGIN and ORDER\_ACCEPTANCE addresses. Customers must add custom mappings to make use of them, especially in the US.

## Special Note for Onetime Vendor Mapping



New address sources have been added for Onetime Customer and Onetime Vendor addresses. We have not included these in the standard mappings that we provide. If a user wishes to adjust the Vendor address source to come from the manually entered Onetime Vendor address entry on the PO (or Onetime Customer on the sales order and billing), then the user will have to add a custom mapping to this table to do so. This may be required for VAT Ship-from calculations if you are using a onetime vendor master record and need complete address for the ship from location in the XML request. See example below.

<input type="checkbox"/>	/IDT/ROUTE_GROUP_PURCHASING	BUYER_PRIMARY	100502	<input checked="" type="checkbox"/>	*	IN02	BUSINESS PLACE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	India Business Place
<input type="checkbox"/>	/IDT/ROUTE_GROUP_PURCHASING	SHIP_FROM	100503	<input type="checkbox"/>	*	*	ONETIME VENDOR	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Onetime Vendor
<input checked="" type="checkbox"/>	GN /IDT/ROUTE_GROUP_SALES	BUYER_PRIMARY	10	<input type="checkbox"/>	*	*		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Sold to Party-Buyer Primary

## Address Types

The Address Types table represents the addresses supported in the Determination XML structure. There are three special address types for use with Registrations, see "[Registration Number Mapping](#)" for their specific use. This table is provided as a standard default only. There is no corresponding custom table for this as address types can only be changed via a tax calculation interface change in Determination.

Transaction Code: **/N/IDT/ADDRESS\_TYPES\_V**

Display View "Determination Address Types: Standard": Overview	
<b>Determination Address Types: Standard</b>	
Logical Address Type	
BILL_TO	
BUYER_REGISTRATION_DUMMY	
BUYER_PRIMARY	
MIDDLEMAN	
MIDDLEMAN_REGISTRATION_DUMMY	
ORDER_ACCEPTANCE	
ORDER_ORIGIN	
SELLER_REGISTRATION_DUMMY	
SELLER_PRIMARY	
SHIP_FROM	
SHIP_TO	
SUPPLY	

## Address Sources

The Address Source table represents a list of SAP address entities supported with Integration. Behind each address source, code has been implemented that knows how to gather the necessary data based on the business process used. The address sources are in addition to the partner function based addresses supported in the address mapping.

Transaction Code: **/N/IDT/ADDRESS\_SOURC\_V**

Display View "SAP Non-Partner Function Address Sources: Standard": Overview			
S...	Pr...	Address Source	Class to Set Address
<input checked="" type="checkbox"/>	GN	BUSINESS PLACE	/IDT/SET_ADDRESS_BUSINESS_PLAC
<input checked="" type="checkbox"/>	GN	COMPANY CODE	/IDT/SET_ADDRESS_COMPANY_CODE
<input checked="" type="checkbox"/>	GN	COST CENTER	/IDT/SET_ADDRESS_COST_CENTER
<input checked="" type="checkbox"/>	GN	CUSTOMER	/IDT/SET_ADDRESS_CUSTOMER
<input checked="" type="checkbox"/>	GN	DEFERRED TAX REF DO...	
<input checked="" type="checkbox"/>	GN	DEFERRED TAX REF DO...	
<input checked="" type="checkbox"/>	GN	DELIVERY ADDRESS	/IDT/SET_ADDRESS_DELIVERY_ADDR
<input checked="" type="checkbox"/>	GN	INTERNAL ORDER	/IDT/SET_ADDRESS_ORDER
<input checked="" type="checkbox"/>	GN	LIV OVERRIDE ADDRESS	/IDT/SET_ADDRESS_LIV_OVERRIDE
<input checked="" type="checkbox"/>	GN	LIV UNPLANNED ADDRE...	/IDT/SET_ADDRESS_LIV_UDC
<input checked="" type="checkbox"/>	GN	NETWORK ELEMENT	/IDT/SET_ADDRESS_NETWORK
<input checked="" type="checkbox"/>	GN	ONETIME CUSTOMER	/IDT/SET_ADDRESS_ONETIME_CUST
<input checked="" type="checkbox"/>	GN	ONETIME VENDOR	/IDT/SET_ADDRESS_ONETIME_VEND
<input checked="" type="checkbox"/>	GN	OVERRIDE ADDRESS	/IDT/SET_ADDRESS_OVERRIDE_ADDR
<input checked="" type="checkbox"/>	GN	PLANT	/IDT/SET_ADDRESS_PLANT
<input checked="" type="checkbox"/>	GN	PLANTS ABROAD SUPPL...	
<input checked="" type="checkbox"/>	GN	PLANTS ABROAD SUPPL...	
<input checked="" type="checkbox"/>	GN	SALES ORGANIZATION	/IDT/SET_ADDRESS_SALES_ORG
<input checked="" type="checkbox"/>	GN	SHIPPING POINT	/IDT/SET_ADDRESS_SHIP_POINT
<input checked="" type="checkbox"/>	GN	STORAGE LOCATION	/IDT/SET_ADDRESS_STORAGE_LOC
<input checked="" type="checkbox"/>	GN	VENDOR	/IDT/SET_ADDRESS_VENDOR
<input checked="" type="checkbox"/>	GN	WBS ELEMENT	/IDT/SET_ADDRESS_WBS

List of the predefined address sources delivered with Integration.

You will see that we now have a new column for "Class to Set Address" that is populated with the name of the programming class that contains the program logic for this address source. If you have need to change the address source so that it pulls the address based on a different master data field, you can make your modifications to this class as noted in the table.



Any customization that you may have done in your system prior to Integration release 6.3.0.0 will likely be ignored with the creation of these new classes. When upgrading to release 6.3.0.0 from a prior release of our product you should update any customizations by making the changes to the class we have noted in this table as opposed to how you modified the address source prior in your system.

You can create custom address sources via Transaction Code: **/N/IDT/ADDRESS\_SOURCES**

S...	Address Source	Class to Set Address

You would name your custom address source in this screen and then program the logic on how that address has to be found from the business transaction. Once done so you can map the source in the address mapping. See the Installation and Programmers Guide topic “Custom Address Source” for a programming example.

## Registration Number Mapping

Providing the proper set of registration numbers to Determination is important in the taxing decision. Integration for SAP provides a flexible approach to meet that requirement by combining the Address Mapping and Field Mapping features.

### Address Mapping Based

Mapping for VAT registration numbers based on the partner function are managed through the address mapping table with the use of three check boxes (Buyer, Seller, and Middleman roles) at the far-right side of the table. You will see that we have set standard mapping for these in the standard view only table but that a user can append or override them using the customer address mapping table.

Transaction Code: **/N/IDT/ADDRESS\_MAP\_NEW**


A partial view of the combined Address Mapping is provided here.

Display View "Address Mapping Configuration": Overview													
S	Pr..	Route Name	Logical Address Type	Sort Order	A	Cn..	CoCd	Address Source	Fu..	B..	S..	M	Description
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	SHIP_FROM	10	<input checked="" type="checkbox"/>	*	*	PLANT		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Plant-Ship From
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To Party-Supply To
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	SUPPLY	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To Party-Supply for Services
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Company Code-Seller Primary&Seller Registration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*		SP	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Sold To Party-Buyer Primary&Buyer Registration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	20	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Brazil Business Place
<input type="checkbox"/>		/IDT/ROUTE_GROUP_BILLING_GEN	BUYER_PRIMARY	111110	<input checked="" type="checkbox"/>	BR	*	LIV OVERRIDE ADDRESS		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Company Code-Seller Primary&Seller Registration
<input type="checkbox"/>		/IDT/ROUTE_GROUP_BILLING_GEN	BUYER_PRIMARY	111111	<input type="checkbox"/>	BR	*	LIV OVERRIDE ADDRESS		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Company Code-Seller Primary&Seller Registration
<input type="checkbox"/>		/IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	111111	<input type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Company Code-Seller Primary&Seller Registration
<input type="checkbox"/>		/IDT/ROUTE_GROUP_BILLING_GEN	SELLER_PRIMARY	555555	<input type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Company Code-Seller Primary&Seller Registration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Company Code-Buyer Primary & Buyer Registration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Company Code-Seller Primary & Seller Registration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	SHIP_FROM	10	<input checked="" type="checkbox"/>	*	*	PLANTS ABROAD SUPPLYING PLANT		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	PA Supplying Plant-Ship From
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_BILLING_PA	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To Party-Ship To
<input type="checkbox"/>		/IDT/ROUTE_GROUP_BILLING_PA	ORDER_ACCEPTANCE	111111	<input type="checkbox"/>	*	*	PLANT		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	test
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_DELIVERY	SUPPLY	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To-Supply for Services
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_DELIVERY	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*		SH	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To Party-Ship To
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_DELIVERY	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Shipping Point-From
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_DELIVERY	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*		SH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Company Code-Seller Primary & Seller Registration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_DELIVERY	SELLER_PRIMARY	20	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Ship To Party-Buyer Primary & Buyer Registration
<input type="checkbox"/>		/IDT/ROUTE_GROUP_DELIVERY	SELLER_PRIMARY	100001	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Brazil Business Place
<input type="checkbox"/>		/IDT/ROUTE_GROUP_DELIVERY	BUYER_PRIMARY	100002	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Brazil Business Place
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	BUYER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Company Code-Buyer Primary & Buyer Registration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SELLER_PRIMARY	10	<input checked="" type="checkbox"/>	*	*		VN	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	VendorPartnerFunc-SellerPrimary&SellerRegistration
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SHIP_FROM	10	<input checked="" type="checkbox"/>	*	*		VN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Vendor Partner Function-Ship From
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SUPPLY	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Company Code-Supply-If no Cost Center & Plant
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	10	<input checked="" type="checkbox"/>	*	*	COMPANY CODE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Company Code-Ship To-If no Cost Center & Plant
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	PLANT	20	<input checked="" type="checkbox"/>	*	*			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Plant-Ship To-If no Cost Center
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	PLANT	20	<input checked="" type="checkbox"/>	*	*			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Plant-Supply-If no Cost Center
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	BUYER_PRIMARY	20	<input checked="" type="checkbox"/>	BR	*	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Brazil Business Place
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	30	<input checked="" type="checkbox"/>	*	*	COST CENTER		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Cost Center-Ship To
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SUPPLY	30	<input checked="" type="checkbox"/>	*	*	COST CENTER		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Cost Center-Supply
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	40	<input checked="" type="checkbox"/>	*	*	WBS ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To-WBS Element
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SUPPLY	40	<input checked="" type="checkbox"/>	*	*	WBS ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To-WBS Element
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	50	<input checked="" type="checkbox"/>	*	*	NETWORK ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To-Network Elem
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SUPPLY	50	<input checked="" type="checkbox"/>	*	*	NETWORK ELEMENT		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To-Network Elem
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SUPPLY	60	<input checked="" type="checkbox"/>	*	*	INTERNAL ORDER		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To-InternalOrder
<input checked="" type="checkbox"/>	GN	/IDT/ROUTE_GROUP_PURCHASING	SHIP_TO	60	<input checked="" type="checkbox"/>	*	*	INTERNAL ORDER		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ship To-InternalOrder
<input type="checkbox"/>		/IDT/ROUTE_GROUP_PURCHASING	SELLER_PRIMARY	100001	<input type="checkbox"/>	*	*	VENDOR		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>		/IDT/ROUTE_GROUP_PURCHASING	BUYER_PRIMARY	100001	<input type="checkbox"/>	*	4200	BUSINESS PLACE		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Taiwan business place

You will see by the table example above that there are boxes checked to map the VAT registration numbers for each of the various routes in the table. Each route will need a mapping for a buyer role and a seller role. The middleman role has not been mapped in the standard mapping; however, you can elect to map a middleman role based on your requirements.

## Address and Registration Source Same


In some cases, you might desire a different partner function as the source for registrations than what is delivered in the standard. In these cases, you can add a new mapping to the Address Mapping table and check the proper registration source. In that case that source serves as the address and registrant source.

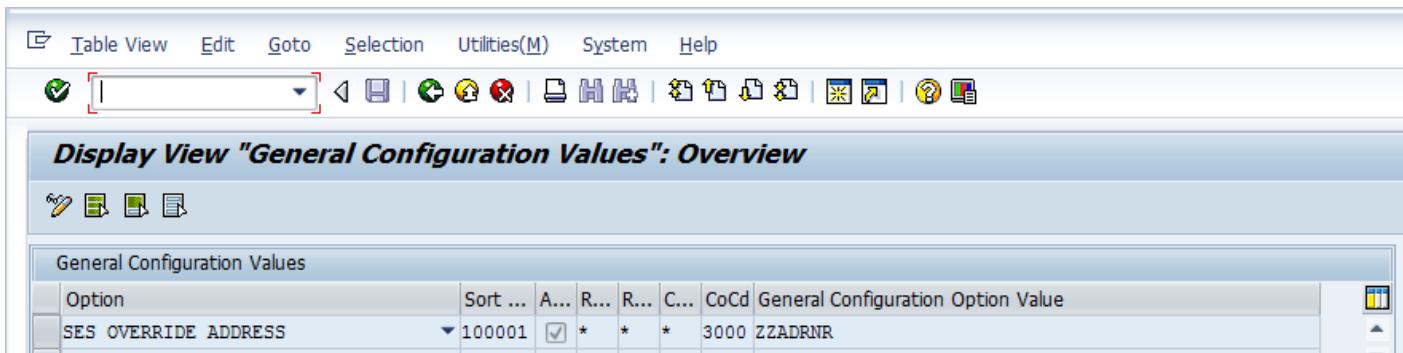

Option	Sort ...	A...	R...	R...	C...	CoCd	General Configuration Option Value
SES OVERRIDE ADDRESS	100001	<input checked="" type="checkbox"/>	*	*	*	3000	ZZADRNR

## Address and Registration Source Different

When the address source needs to be different than the VAT Registration source you can add a mapping using a DUMMY address mapping which serves only as the registration source. The DUMMY base does not carry with it the address but can be used for the mapping of the registration numbers.

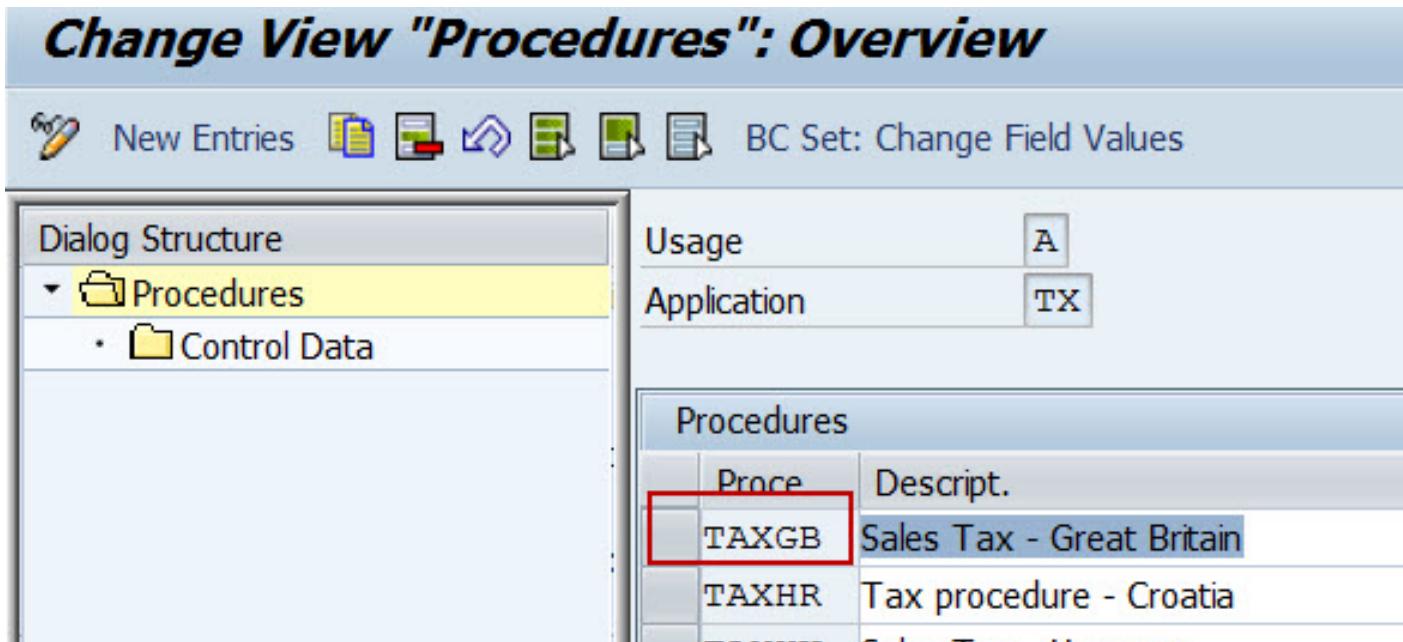

Proce	Descript.
TAXGB	Sales Tax - Great Britain
TAXHR	Tax procedure - Croatia

In our standard mapping for LIV transactions the address and registration source for the SELLER\_PRIMARY is the Vendor. In above sample the registration source has been switched to the Invoicing Party (IP), while the address source is still the Vendor by using the SELLER REGISTRATION DUMMY address type.

## Determination Source

The VAT Registration mapping that is shown here is all done via the address mapping table and the field mapping table within in SAP. However, you may also elect to maintain the VAT Registration Numbers for each of your companies via the configuration within the Determination. In that case you would “remove” the check mark from the VAT registration columns on any of the VAT registration mapping lines that use the company code address by creating custom copies of the Thomson Reuters provided mappings. Once done, the VAT Registration is then taken from Determination company configuration setup instead of SAP.

## Field Mapping Based

The address mapping-based registration solution provides means to source the primary and foreign registrations from SAP. However, in some cases registration numbers might be stored in the additionally provided Tax Number 1 through 4 (or 5 depending on SAP EHP) fields. This is mainly the case when there are Federal and lower level (Provincial) registrations required, like for example in Canada.

Display View "Field Mappings: Custom": Overview																					
Field Mappings: Custom		S...		Journey Name		Sort ...		A...		R...		C...		CoCd	Source Base	Source Field	Target Base	Target Field	O...	Adjustm...	Description
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109030	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=AG] -KNA1-STCD1	DET_INVOICE	REGISTRATIONS-BUYER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109031	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=AG] -KNA1-STCD2	DET_INVOICE	REGISTRATIONS-BUYER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109032	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=AG] -KNA1-STCD3	DET_INVOICE	REGISTRATIONS-BUYER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109033	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=AG] -KNA1-STCD4	DET_INVOICE	REGISTRATIONS-BUYER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109034	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=LF] -LFA1-STCD1	DET_INVOICE	REGISTRATIONS-SELLER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109035	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=LF] -LFA1-STCD2	DET_INVOICE	REGISTRATIONS-SELLER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109036	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=LF] -LFA1-STCD3	DET_INVOICE	REGISTRATIONS-SELLER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109037	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER	PARTNER_TAB [PARVW=LF] -LFA1-STCD4	DET_INVOICE	REGISTRATIONS-SELLER_ROLE [ADD]	<input checked="" type="checkbox"/>		TABLE LOGIC	

To map these sources a field mapping-based entry has to be made from two parts.

The source field definition:

PARTNER\_TAB [PARVW=AG] -KNA1-STCD1

The target field definition:

REGISTRATIONS-BUYER-ROLE [ADD]

EXPRESSION	EXPLANATION
PARTNER_TAB	Used to reference a partner address.
PARVW	Defines which partner function to use when looking at the partner address. The value PARVW must be followed by an '=' sign and then the two-digit German partner function code to use.
Source Table	Either KNA1 (Customer) or LFA1 (Vendor).

Source Field	Any of STCD1, STCD2, STCD3 and STCD4 (and STCD5 in EHP6 and above).
Target Field	The structure to use REGISTRATIONS and the role to be mapped to. This must follow by the [ADD] action to make sure a new row will be added with the value mapped.



Depending on which partner function you want to use in your mapping you will need to insert the German translation of the partner code. Use SM30 transaction to view the V\_TPAUN table and see the partner function codes that are used based on language and your system configuration. You will need to use the German translation of the code for the mapping.

For customer mapping the target would be the REGISTRATIONS-BUYER\_ROLE. The source field would be entered as shown below for the route groups involving customers:

PARTNER\_TAB [PARVW=AG]-KNA1-STCD1

For vendor mapping the target would be the REGISTRATIONS-SELLER\_ROLE. The source field would be entered as shown below for the route groups involving vendors:

PARTNER\_TAB [PARVW=LF]-LFA1-STCD1

Based on the SD based mapping above a registration collection sent to Determination could look like this:

```
<REGISTRATIONS>
  <BUYER_ROLE>123123123RT</BUYER_ROLE>
  <BUYER_ROLE>PST-1234-5678</BUYER_ROLE>
  <SELLER_ROLE>231231235RT</SELLER_ROLE>
</REGISTRATIONS>
```



In all the examples shown above, the mapping is at the Determination Invoice level however you may need to consider also mapping at the line level if you have scenarios where you may change a partner at the line level.

## Determination Response Based

Determination will return the three possible VAT registration numbers used to make the taxing decision for possible use in invoice printing, reporting, and compliance. A standard mapping is provided to have them written back to the Thomson Reuters Tax Data table.

Display View "Maintenance view for /IDT/D_FIELD_MAP": Overview														
S...	Journey Name	Sort ...	A...	R...	G...	C...	C...	Source Base	Source Field	Target Base	Target Field	O...	Adjustm...	Description
<input checked="" type="checkbox"/>	/IDT/JOURNEY_TAX_TAB_RESPONSE	210	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	BUYER_REGISTRATION	SAP_TAX_LINE	BUYER_REG	<input type="checkbox"/>		BUYER REGISTRATION
<input checked="" type="checkbox"/>	/IDT/JOURNEY_TAX_TAB_RESPONSE	220	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	SELLER_REGISTRATION	SAP_TAX_LINE	SELLER_REG	<input type="checkbox"/>		SELLER REGISTRATION
<input checked="" type="checkbox"/>	/IDT/JOURNEY_TAX_TAB_RESPONSE	230	<input checked="" type="checkbox"/>	*	*	*	*	DET_TAX	MIDDLEMAN_REGISTRAT...	SAP_TAX_LINE	MID_MAN_REG	<input type="checkbox"/>		MIDDLEMAN REGISTRATION

## Registration Based on Business Place Configuration

For many non-EU countries (Brazil, India, Taiwan, Korea, etc...) registration information is not stored in T001N or T001 tables in SAP but stored in the Business place in SAP.

Transaction: **SPRO** navigate to > **Cross Application Components > General Application Functions > Place of Business > Define Business Place.**

Within a company code there can be many business places with different registration information for each depending on the country tax policy. The Business Place is selected during transaction processing and tied through configuration to the sales office for sales order processing.

See screen print below that shows the two fields used within the business place configuration to store the VAT registration numbers. For purpose of this example we are using the Tax 2 field.

Table name: **J\_1BBranch**

Field names **STCD1** and **STCD2**

**New Entries: Details of Added Entries**

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>												
Process	CA3													
<table border="1"> <tr> <td colspan="2">General details</td> </tr> <tr> <td>Description</td> <td>Calif input tax US</td> </tr> <tr> <td>Tax type</td> <td>2</td> </tr> <tr> <td>Not deductible</td> <td><input type="checkbox"/></td> </tr> <tr> <td>Posting indic.</td> <td>2</td> </tr> <tr> <td>Not discnt rel.</td> <td><input type="checkbox"/></td> </tr> </table>			General details		Description	Calif input tax US	Tax type	2	Not deductible	<input type="checkbox"/>	Posting indic.	2	Not discnt rel.	<input type="checkbox"/>
General details														
Description	Calif input tax US													
Tax type	2													
Not deductible	<input type="checkbox"/>													
Posting indic.	2													
Not discnt rel.	<input type="checkbox"/>													

Utilize fields from the **J\_1BBranch** table within the Flexible Field Mapper for the following journeys:

- /IDT/JOURNEY\_HEADER\_REQUEST
- /IDT/JOURNEY\_ITEM\_REQUEST

- /IDT/JOURNEY\_NG\_ITEM\_REQUEST

**NOTE:**

The source of Business Place is different per transaction, it is therefore recommended to map fields from the J\_1BBranch table source to Determination, and not from the transaction tables. If using the value from the transaction, then it would be as follows:

- FB60 - BSEG-BUPLA for the vendor line
- FB70 - BSEG-BUPLA for the customer line
- FB01 like - BKPF-BRANCH
- MIRO - RBKP-BUPLA

Sample mappings for the registration from the business place are shown below for the three journeys mentioned above.

Header request journey mapping

Display View "Field Mappings: Custom": Overview																								
Field Mappings: Custom		S...		Journey Name		Sort ...		A...		R...		R...		CoCd		Source Base	Source Field	Target Base	Target Field	O...		A...	Description	Simple Expression
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	100003	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	CONSTANT		DET_INVOICE	USER_ELEMENT[NAME=A...]		B.. BOOLEAN TE...					
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	100004	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	CONSTANT	X	DET_INVOICE	USER_ELEMENT[NAME=A...]		B.. BOOLEAN TE...					
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	100014	<input type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	CONSTANT	T1	DET_INVOICE	TRANSACTION_TYPE		TRANSACTION_TYPE.&VBAK-XEGDR& NE IS_INITIAL					
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109029	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	4200 SAP_HEADER J_1BBranch-STCD2		DET_INVOICE	REGISTRATIONS-BUYER...	<input checked="" type="checkbox"/>	BUYER REGIS...&CALC_HDR-ROLE& EQ 'B'					
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109030	<input checked="" type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	4200 SAP_HEADER J_1BBranch-STCD2		DET_INVOICE	REGISTRATIONS-SELLER...	<input checked="" type="checkbox"/>	SELLER REGI...&CALC_HDR-ROLE& EQ 'S'					
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109933	<input type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER PARTNER_TAB[PARVW=R... DET_INVOICE		REGISTRATIONS-SELLER...								
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109934	<input type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER PARTNER_TAB[PARVW=R... DET_INVOICE		REGISTRATIONS-SELLER...								
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109935	<input type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER PARTNER_TAB[PARVW=R... DET_INVOICE		REGISTRATIONS-SELLER...								
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	109936	<input type="checkbox"/>	*	*	*	*	*	*	*	*	*	*	SAP_HEADER PARTNER_TAB[PARVW=R... DET_INVOICE		REGISTRATIONS-SELLER...								

Item request journey mapping

<input type="checkbox"/>	/IDT/JOURNEY_ITEM_REQUEST	100014	<input checked="" type="checkbox"/>	*	*	*	*	EU	*	CONSTANT	T1		DET_LINE	TRANSACTION_TYPE	<input type="checkbox"/>		TRANSACTION_TYPE.&VBAK-XEGDR& EQ 'X'								
<input type="checkbox"/>	/IDT/JOURNEY_ITEM_REQUEST	109048	<input checked="" type="checkbox"/>	*	*	*	*			4200 SAP_ITEM	HDR->J_1BBranch-STCD2	DET_LINE	REGISTRATIONS-BUYER...	<input checked="" type="checkbox"/>		BUYER REGISTRATI...&HDR->CALC_HDR-ROLE& EQ 'B'									
<input type="checkbox"/>	/IDT/JOURNEY_ITEM_REQUEST	109049	<input checked="" type="checkbox"/>	*	*	*	*			4200 SAP_ITEM	HDR->J_1BBranch-STCD2	DET_LINE	REGISTRATIONS-SELLER...	<input checked="" type="checkbox"/>		SELLER REGISTRATI...&HDR->CALC_HDR-ROLE& EQ 'S'									
<input type="checkbox"/>	/IDT/JOURNEY_ITEM_REQUEST	109933	<input checked="" type="checkbox"/>	*	*	*	*			SAP_ITEM	HDR->PARTNER_TAB[PARVW=R... DET_INVOICE	REGISTRATIONS-SELLER...		<input type="checkbox"/>											

NG Item request journey mapping: note use of HDR-> in this one also.

Field Mappings: Custom																
S...	Journey Name	Sort ...	A...	R...	R...	C...	CoCd	Source Base	Source Field	Target Base	Target Field	O...	A...	Description	Simple Expression	
<input type="checkbox"/>	/IDT/JOURNEY_NG_ITEM_REQUEST	100840	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	PARTNER_TAB[PARVN=R...]	DET_LINE	REGISTRATIONS-SELLER...	<input type="checkbox"/>				
<input type="checkbox"/>	/IDT/JOURNEY_NG_ITEM_REQUEST	100900	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->LFA1-LIFNR	DET_LINE	VENDOR_NUMBER	<input type="checkbox"/>		PI VENDOR N...		
<input type="checkbox"/>	/IDT/JOURNEY_NG_ITEM_REQUEST	104999	<input checked="" type="checkbox"/>	*	*	*	*	4200	SAP_ITEM	HDR->J_1BBRANCH-STC...	DET_LINE	REGISTRATIONS-BUYER...	<input checked="" type="checkbox"/>		TABLE LOGIC_&HDR->CALC_HDR-ROLE& EQ 'B'	
<input type="checkbox"/>	/IDT/JOURNEY_NG_ITEM_REQUEST	105000	<input checked="" type="checkbox"/>	*	*	*	*	4200	SAP_ITEM	HDR->J_1BBRANCH-STC...	DET_LINE	REGISTRATIONS-SELLER...	<input checked="" type="checkbox"/>		TABLE LOGIC_&HDR->CALC_HDR-ROLE& EQ 'S'	
<input type="checkbox"/>	/IDT/JOURNEY_NG_ITEM_REQUEST	109935	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	HDR->BKPF-BLART	DET_LINE	USER_ELEMENT[NAME=A...	<input checked="" type="checkbox"/>		ADD BKPF T...		
<input type="checkbox"/>	/IDT/JOURNEY_NG_ITEM_REQUEST	231000	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	PARTNER_TAB[PARVN=R...]	DET_LINE	USER_ELEMENT[NAME=A...	<input checked="" type="checkbox"/>		IP MAPPING-...		
<input type="checkbox"/>	/IDT/JOURNEY_NG_NDOC_ITEM_REQ	100810	<input type="checkbox"/>	*	*	*	*	SAP_ITEM	PARTNER_TAB[PARVN=R...]	DET_LINE	REGISTRATIONS-SELLER...	<input type="checkbox"/>		INVOICING P...		

The HDR-> pointer is used when mapping the field from the Header record to the line-item on the order and is required for the latter two journey mappings as shown above.

Other standard SAP configuration set up would be required to create the business place for the specified company code and country as well as tying it to the sales organization and sales area structures in SD module, etc. We have not shown all Business Place standard SAP configurations in this example.

A new address source for custom address mapping of BUSINESS PLACE address has also been created as part of this solution. Use transaction **/N/IDT/ADDRESS\_MAPPING** to enable this feature if you also desire to map the address from the business place master data in addition to the registration numbers shown here. See Address Mapping table instructions noted above.

## DETERMINATION SETUP

### Tax Code Qualifier Configuration

#### SAP Tax Code Setup

Before we get into the configuration details there are prerequisite steps that must be completed prior to this process. They include:

1. Analysis and documentation of your tax policy needs for a given country configuration.
2. Identify the list of needed tax code and account keys required. This is often an exercise in reverse engineering as we recommend that you look first at what will be required for your compliance reporting needs and where specific tax code and tax type breakouts may be needed to get the data summarized into the correct “buckets” for the specific country’s reporting. This may also need to take into consideration your company structure, sales and purchasing models, tax exempt situations, shipping methods, tax laws, etc.
3. Decide on other needed tax codes for items such as separate tax codes to be used for override transactions, fallback tax codes, and driver tax code.
4. Create the needed tax codes and account keys in SAP.

5. Create your G/L accounts that you want to use for the tax code account assignments. Consider that this step may also be a reverse engineering exercise to identify required accounts for better reconciliation needs and prerequisites to easier compliance reporting.

## Tax Code Concepts

One of the key designs of Integration for SAP is the assignment of a Results Tax Code in SAP based on the Determination tax calculation. Instead of using SAP's standard process of a tax code having a fixed rate, we will instead setup SAP tax codes without a rate maintained on them. This will eliminate the need for creating new tax codes in SAP each time a tax rate changes, greatly simplifying system maintenance and user training. Once Determination returns the tax results, including the rate, we will use that results structure to update SAP with the proper tax code, account key, and other tax details.

Change View "Maintenance view for /IDT/D_FIELD_MAP": Overview														
       New Entries       														
S...	Journey Name	Sort ...	A...	R...	G...	C...	Source Base	Source Field	Target Base	Target Field	O...	Adjustm...	Description	Simple Expression
<input type="checkbox"/>	/IDT/JOURNEY_HEADER_REQUEST	100010	<input checked="" type="checkbox"/>	*	*	*	SAP_HEADER	:ZCL_USER_EXIT	USER_ATTRIBUTES_INV	ATTRIBUTE18	<input type="checkbox"/>		USER-EXIT SAMPLE	

The ERP Tax Code is repopulated as the final SAP Tax Code and Account Assignment key through our standard mapping table and code. SAP then uses this information to establish the correct general ledger account to be used for the GL accounting document. For an overview of the process see the *User Guide -> New logic for the assignment of General Ledger Accounts*.

## Driver Tax Codes

We recommend that you setup tax code O1 as the driver tax code for output tax on sales orders, I1 as the driver tax code on input tax on purchases, and if you are configuring for US tax, the U1 tax code for self-accrued consumer use tax. These three tax codes are not used in the account assignment table T030K. They are used during the initial document creation process and can either be assigned using condition records, info records, or manually. The sole purpose of this set of tax codes is to initiate the tax call to Determination. These tax codes don't have to be mapped in T030K to a General Ledger account.

## Results Tax Codes

These are tax codes which are maintained in SAP for posting to General Ledger accounts and downstream processes like reporting and compliance. These tax codes are setup without a tax rate in SAP. At time of the tax calculation Determination will assign an ERP\_TAX\_CODE based on the results of the Tax Code Qualifier evaluation back to SAP. Integration then takes the ERP\_TAX\_CODE value and assigns it to the SAP transaction by overriding the driver tax code with the results tax code and account key.

## Fallback Tax Codes

The process of driving a tax calculation to the final tax code and account key assignment involves the standard setup in SAP of tax codes, account assignment keys, general ledger accounts, and the account assignment table as well as the Tax Code Qualifier process in Determination. If any side of the needed configuration is missing, you will likely get an error message and an incomplete document that will not post correctly to accounting halting your business process. To avoid a possible error due to a missing or incorrect setup we recommend the use of a fallback tax code. A fallback TCQ would be at the bottom of the sort order as an assignment of last resort if none of the other TCQ assignments apply. It would allow the entry to post to a temporary account assignment rather than block the transaction. This logic is purely optional and one that you may or may not choose to use in your configuration.

If a fallback account is created and assigned to the fallback TCQ then procedures should be established to ensure that you are monitoring this account to correct entries that may fall to this default setting. To set this up for your system you will need to:

- Create a new tax liability account on the G/L for fall back posting to account assignment.
- Create both a fallback input tax code and a fallback output tax code.
- Add table entries to the T030K account assignment table based on the account key and tax code.
- Setup TCQ to drive the transaction to the new account.

## Special Note on Assigning Tax Codes

For US and Canada TCQ and tax code assignments, users may encounter error number FF-753 in situations where multiple tax codes are assigned to a single line-item. This can occur when one authority is exempt (AO) and other are taxed (A1), or in Canada where we have GST (A1) and PST (A2). This is discussed in OSS note 495737. When error message FF-753 is set to error mixing of tax codes on the same line isn't possible. If you encounter this issue and elect to not change FF-753 per this OSS note then different TQC and tax code assignment logic is needed that allows for the tax code to be the same but instead creating additional account assignment codes for your tax authority assignments. Two optional templates are available via the ONESOURCE Indirect Tax and Compliance Support website for use in this situation for both US and Canada. Knowledge Base article "[Setting up Tax Code Qualifiers in Determination for Global Next Integrations](#)" provides details and samples on this.

## Tax Code Qualifier Examples

Once you have completed above steps, you are now ready to tie it all together from end to end by configuring your Tax Code Qualifiers (TCQ) in Determination. Please consult the Determination Online Help to familiarize yourself with the TCQ feature and function.

The following information is an example of how you might want to configure the Tax Code Qualifiers for a Great Britain company code. This is provided as a possible tool for set up of your system for GB and other countries but your configuration may be different according to your needs.

## Basic Setup

For the below sample the assumption has been made that the tax code should drive the rate and the tax treatment should be reflected in the account assignment key. Thereby a V1 is standard rate, V2 reduced rate etc. In this sample the "A" tax codes are output tax, the "Y" tax codes are used as override output tax codes. The "V" tax codes are input tax and the "Z" tax codes are used as override input tax codes. These are the single direction tax code assignments as opposed to those that require both an 'I' and 'O' direction like reverse charge, acquisition etc.

START DATE	END DATE	CONDITIONS											ERP_TAX_CODE
		INVOICE_EXTER_NAL_COMPANY	TAX_TAXABLE_COUNTRY	TAX_TAX_RATE_CODE	TAX_TAX_TYPE	TREATMENT	TAX_TAX_DIRECTION	INVOICE_CO_MPANY_ROL	TAX_IS_EXEMPT	TAX_TAX_CODE	TAX_TAX_RATE		
V1V2014	12/31/9999	2000	=	GB	=				S	=	TRUE	=	A0-MWS
V1V2014	12/31/9999	2000	=	GB	=	SR	=	S	=				NOT NULL A1-MWS
V1V2014	12/31/9999	2000	=	GB	=	RR	=	S	=				NOT NULL A2-MWS
V1V2014	12/31/9999	2000	=	GB	=	ZR	=	S	=				NOT NULL A3-MWS
V1V2014	12/31/9999	2000	=	GB	=	NL	=	S	=				NOT NULL A7-MWS
V1V2014	12/31/9999	2000	=	GB	=	SR	=		D	=			NOT NULL A5-MWS
V1V2014	12/31/9999	2000	=	GB	=	SR	=	S	=				
V1V2014	12/31/9999	2000	=	GB	=	SR	=	S	=				NOT NULL Y1-MWS
V1V2014	12/31/9999	2000	=	GB	=	RR	=	S	=				NOT NULL Y2-MWS
V1V2014	12/31/9999	2000	=	GB	=	ZR	=	S	=				NOT NULL Y3-MWS
V1V2014	12/31/9999	2000	=	GB	=	NL	=	S	=				NOT NULL Y7-MWS
V1V2014	12/31/9999	2000	=	GB	=	SR	=		D	=			NOT NULL Y5-MWS
V1V2014	12/31/9999	2000	=	GB	=	SR	=						NOT NULL YA-MWS
V1V2014	12/31/9999	2000	=	GB	=								
V1V2014	12/31/9999	2000	=	GB	=				B	=	TRUE	=	V0-VST
V1V2014	12/31/9999	2000	=	GB	=	SR	=	S	=				NOT NULL V1-VST
V1V2014	12/31/9999	2000	=	GB	=	RR	=	S	=				NOT NULL V2-VST
V1V2014	12/31/9999	2000	=	GB	=	ZR	=	S	=				NOT NULL V3-VST
V1V2014	12/31/9999	2000	=	GB	=	NL	=	S	=				NOT NULL V7-VST
V1V2014	12/31/9999	2000	=	GB	=	SR	=	NR	=				NOT NULL V6-VST
V1V2014	12/31/9999	2000	=	GB	=	SR	=		D	=			NOT NULL V5-VST
V1V2014	12/31/9999	2000	=	GB	=				B	=			
V1V2014	12/31/9999	2000	=	GB	=	SR	=	S	=				NOT NULL Z1-VST
V1V2014	12/31/9999	2000	=	GB	=	RR	=	S	=				NOT NULL Z2-VST
V1V2014	12/31/9999	2000	=	GB	=	ZR	=	S	=				NOT NULL Z3-VST
V1V2014	12/31/9999	2000	=	GB	=	NL	=	S	=				NOT NULL Z7-VST
V1V2014	12/31/9999	2000	=	GB	=	SR	=	NR	=				NOT NULL Z6-VST
V1V2014	12/31/9999	2000	=	GB	=	SR	=		D	=			NOT NULL Z5-VST
V1V2014	12/31/9999	2000	=	GB	=				B	=			NOT NULL ZA-VST

## Multiple Tax Directions

For situations where both an Input (I) and Output (O) direction are needed:

### Option 1:

This option assumes that the tax code is designating the tax treatment and not the tax rate.

START DATE	END DATE	CONDITIONS											ERP TAX CODE
		INVOICE_EXTER_NAL_COMPANY	TAX_TAXABLE_COUNTRY	TAX_TAX_RATE_CODE	TAX_TAX_TYPE	TREATMENT	TAX_TAX_DIRECTION	INVOICE_COMPANY_ROL	TAX_IS_EXEMPT	TAX_TAX_CODE	TAX_TAX_RATE		
<b>OPTION1: CONDITIONS OF TAX TYPES WITH 'I' AND 'O' DIRECTIONS</b>													
YY2014	12/31/9999	2000	=	GB	=	RC	=	O	=	B	=	NOT NULL	V4-ESA
YY2014	12/31/9999	2000	=	GB	=	RC	=	I	=	B	=	NOT NULL	V4-ESE
YY2014	12/31/9999	2000	=	GB	=	AC	=	O	=	B	=	NOT NULL	V8-ESA
YY2014	12/31/9999	2000	=	GB	=	AC	=	I	=	B	=	NOT NULL	V8-ESE
YY2014	12/31/9999	2000	=	GB	=	IM	=	O	=	B	=	NOT NULL	V9-ESA
YY2014	12/31/9999	2000	=	GB	=	IM	=	I	=	B	=	NOT NULL	V9-ESE

## Option 2:

This option assumes that the tax code is designating the tax rate and not the tax treatment.

START DATE	END DATE	INVOICE_EXTER_NAL_COMPANY	TAX.TAXABLE_COUNTRY	TAX.TAX_RATE_CODE	TAX.TAX_TYPE	TREATMENT	CONDITIONS				TAX.TAX_CODE	TAX.TAX_RATE	ERP_TAX_CODE
							TAX.TAX_DIRECTION	INVOICE_CO_MPANY_ROL	TAX.IS_EXEMPT	TAX.TAX_CODE			
<b>OPTION2: CONDITIONS OF TAX TYPES WITH 'I' AND 'O' DIRECTIONS</b>													
YY2014	12/31/9999	2000 =	GB =	SR =	RC =		O =	B =					NOT NULL V1-FSA
YY2014	12/31/9999	2000 =	GB =	SR =	RC =		I =	B =					NOT NULL V1-FSE
YY2014	12/31/9999	2000 =	GB =	RR =	RC =		O =	B =					NOT NULL V2-FSA
YY2014	12/31/9999	2000 =	GB =	RR =	RC =		I =	B =					NOT NULL V2-FSE
YY2014	12/31/9999	2000 =	GB =	ZR =	RC =		O =	B =					NOT NULL V3-FSA
YY2014	12/31/9999	2000 =	GB =	ZR =	RC =		I =	B =					NOT NULL V3-FSE
YY2014	12/31/9999	2000 =	GB =	NL =	RC =		O =	B =					NOT NULL V7-FSA
YY2014	12/31/9999	2000 =	GB =	NL =	RC =		I =	B =					NOT NULL V7-FSE
YY2014	12/31/9999	2000 =	GB =	SR =	AC =		O =	B =					NOT NULL V1-DSA
YY2014	12/31/9999	2000 =	GB =	SR =	AC =		I =	B =					NOT NULL V1-DSE
YY2014	12/31/9999	2000 =	GB =	RR =	AC =		O =	B =					NOT NULL V2-DSA
YY2014	12/31/9999	2000 =	GB =	RR =	AC =		I =	B =					NOT NULL V2-DSE
YY2014	12/31/9999	2000 =	GB =	ZR =	AC =		O =	B =					NOT NULL V3-DSA
YY2014	12/31/9999	2000 =	GB =	ZR =	AC =		I =	B =					NOT NULL V3-DSE
YY2014	12/31/9999	2000 =	GB =	NL =	AC =		O =	B =					NOT NULL V7-DSA
YY2014	12/31/9999	2000 =	GB =	NL =	AC =		I =	B =					NOT NULL V7-DSE
YY2014	12/31/9999	2000 =	GB =	SR =	IM =		O =	B =					NOT NULL V1-BSA
YY2014	12/31/9999	2000 =	GB =	SR =	IM =		I =	B =					NOT NULL V1-BSSE
YY2014	12/31/9999	2000 =	GB =	RR =	IM =		O =	B =					NOT NULL V2-BSA
YY2014	12/31/9999	2000 =	GB =	RR =	IM =		I =	B =					NOT NULL V2-BSSE
YY2014	12/31/9999	2000 =	GB =	ZR =	IM =		O =	B =					NOT NULL V3-BSA
YY2014	12/31/9999	2000 =	GB =	ZR =	IM =		I =	B =					NOT NULL V3-BSSE
YY2014	12/31/9999	2000 =	GB =	NL =	IM =		O =	B =					NOT NULL V7-BSA
YY2014	12/31/9999	2000 =	GB =	NL =	IM =		I =	B =					NOT NULL V7-BSSE

## Default Tax Code Sample

The set below is used for fallback scenario and are recommended to always include at the very bottom of the sort order as a catch. The tax code can be mapped in SAP to a fallback account to be reviewed regularly by the tax administrator for analysis and correction.

START DATE	END DATE	INVOICE_EXTER_NAL_COMPANY	TAX.TAXABLE_COUNTRY	TAX.TAX_RATE_CODE	TAX.TAX_TYPE	TREATMENT	CONDITIONS				TAX.TAX_CODE	TAX.TAX_RATE	ERP_TAX_CODE
							TAX.TAX_DIRECTION	INVOICE_CO_MPANY_ROL	TAX.IS_EXEMPT	TAX.TAX_CODE			
YY2014	12/31/9999	2000 =	GB =						B =				YY-YYY
YY2014	12/31/9999	2000 =	GB =						S =				XX-XXX

## Download Samples

You can download samples of exported Tax Code Qualifiers provide by Thomson Reuters from the ONESOURCE Support Network, Knowledge Base Setting up Tax Code Qualifiers in Determination for Global Next Integrations.

## Cash Discount at the Time of Payment: Additional Tax Code Qualifiers Needed

If you are using cash discounts at time of payment on any of your country configuration in SAP then you will need to address this step. Tax code qualifiers will need to be replicated in the TCQ table so that a “standard” Determination tax code condition with attribute 46 condition at the line level of “A1” would drive to an ERP Tax Code of A1-MWS. Likewise, the Attribute 46 of Y1 would drive to ERP tax code of Y1-MWS. You would need to set up an additional TCQ for each entry in the cash discount adjustment table. Each TCQ would be a mirror or your original but would have the additional conditions of tax\_line\_attribute41 = XX where XX would be the original tax code. It would also have a condition for the Determination tax code as it is used in the override tax code instructions. An example is shown below.

QuickLinks Tax Code Qualifiers Workbench Basic Info (Rates and Rules) TransEditors

Richard Padur - SAP DE INC 1000

Menu Help Ready.

**Tax Code Qualifiers**

Selected Group: SAP DE ERP Tax Codes

Selected Tax Code Qualifier: DE\_S\_Cash Disc StandardVAT A1-MWS

Search

Element	Operator	Value	Order
	!=		

Submit Actions

Tax Code Qualifier Conditions 1 - 8 / 8

Element	Operator	Value	Order
TAX.TAXABLE_COUNTRY	=	DE	1
INVOICE.COMPANY_ROLE	=	S	2
TAX.TAX_RATE_CODE	=	SR	3
TAX.TAX_TYPE	=	S	4
TAX.TAX_DIRECTION	=	O	5
TAX.TAX_RATE	IS NOT NULL		6
LINE.USER_ELEMENT.ATTRIBUTE41	=	A1	7
LINE.TAX_CODE	=	STANDARD	8

QuickLinks Tax Code Qualifiers Workbench Basic Info (Rates and Rules) TransEditors

Richard Padur - SAP DE INC 1000

Menu Help Ready.

**Tax Code Qualifiers**

Selected Group: SAP DE ERP Tax Codes

Selected Tax Code Qualifier: DE\_B\_Cash Disc StandardVAT V1-VST

Search

Element	Operator	Value	Order
	!=		

Submit Actions

Tax Code Qualifier Conditions 1 - 8 / 8

Element	Operator	Value	Order
TAX.TAXABLE_COUNTRY	=	DE	1
INVOICE.COMPANY_ROLE	=	B	2
TAX.TAX_RATE_CODE	=	SR	3
TAX.TAX_TYPE	=	S	4
TAX.TAX_DIRECTION	=	I	5
TAX.TAX_RATE	IS NOT NULL		6
LINE.USER_ELEMENT.ATTRIBUTE41	=	V1	7
LINE.TAX_CODE	=	STANDARD	8

Element	Operator	Value	Order
TAX.TAXABLE_COUNTRY	=	DE	1
INVOICE.COMPANY_ROLE	=	S	2
TAX.TAX_RATE_CODE	=	SR	3
TAX.TAX_TYPE	=	S	4
TAX.TAX_DIRECTION	=	O	5
TAX.TAX_RATE	IS NOT NULL		6
LINE.USER_ELEMENT.ATTRIBUTE41	=	Y1	7
LINE.TAX_CODE	=	STANDARD	8

Special note: The sort order of the TCQ list is important to correct assignment. Cash discount adjustment TCQ's should be higher in the list than their non-cash discount counterparts. Likewise, the override version needs to be listed before the non-override. An example of the correct order is shown below:

Position 1: Cash Discount Override Y1 TCQ

Position 2: Cash Discount A1 TCQ

Position 3: Override Y1 TCQ

Position 4: A1 TCQ

## Maintaining Zone Aliases

You may need region codes for countries that tax at levels below country level. ONESOURCE Indirect Tax has enhanced its international tax data to include additional codes (2-digit, 3-digit, ISO) where appropriate.

In many cases, our codes do not match the codes maintained in SAP. For example, Indian state codes are numeric in SAP (for example, 22 = Tamil Nadu) whereas in ONESOURCE Indirect Tax the same one has a code of TN. Therefore, when SAP sends state code 22 to Integration for address determination, it does not match the zone maintained in Determination.

ONESOURCE Indirect Tax enables you to map codes maintained by the ERP system to those maintained in the Determination using the Zone Alias feature.

## Zones for Mismatched Determination and SAP Codes

Identify zones for which Determination codes do not match SAP codes. The region codes for India, Argentina, and several other countries do not match the state/province codes in Determination.


## Identify Region Codes in SAP

1. To display region codes for countries in SAP, navigate to:

Transaction: **SPRO** navigate to **SAP NetWeaver > General Settings >Insert Regions**.

The images show a portion of the region codes for the countries India and Argentina.

2. Locate the region codes you need to map to Determination and write them down.

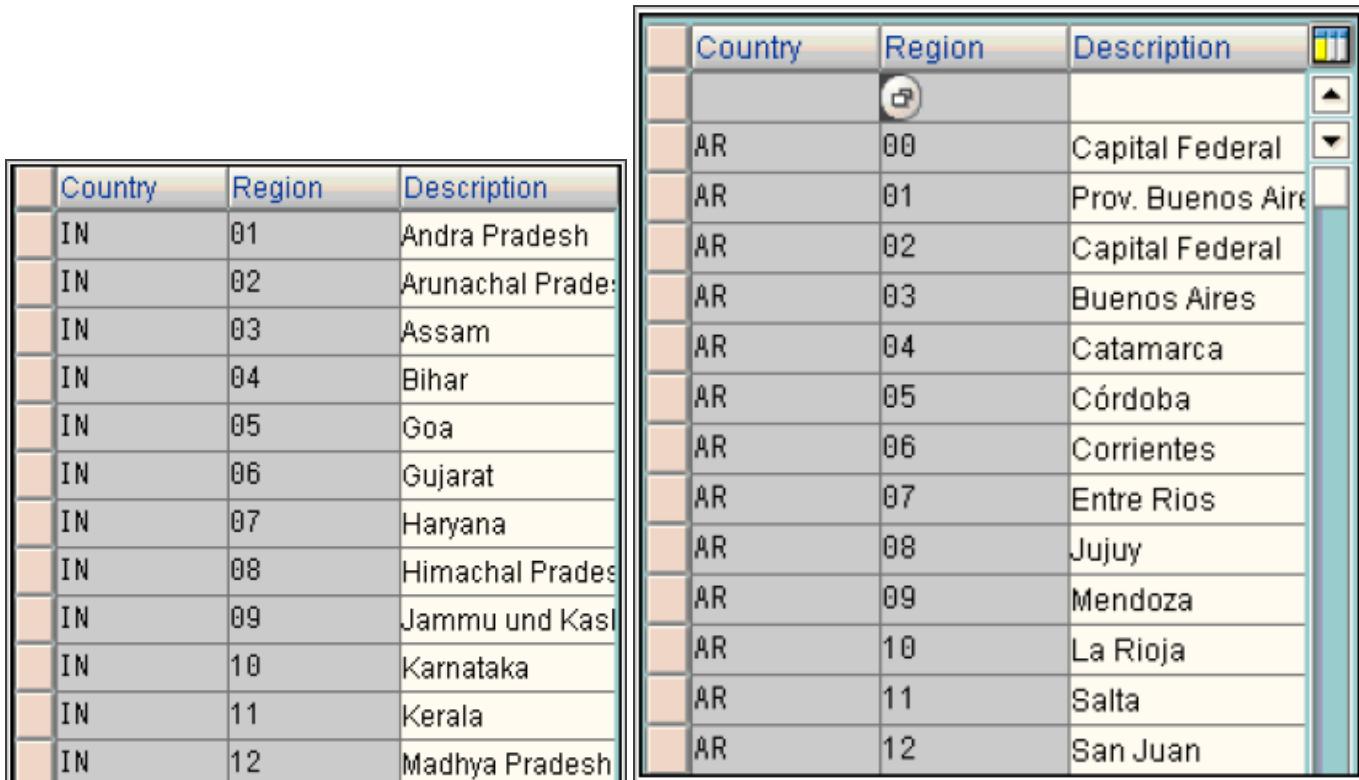

The image shows a screenshot of the SAP NetWeaver General Settings > Insert Regions interface. It displays two tables side-by-side. The left table represents India (IN) and the right table represents Argentina (AR). Both tables have columns for Country, Region, and Description.


Country	Region	Description
IN	01	Andra Pradesh
IN	02	Arunachal Pradesh
IN	03	Assam
IN	04	Bihar
IN	05	Goa
IN	06	Gujarat
IN	07	Haryana
IN	08	Himachal Pradesh
IN	09	Jammu und Kashmir
IN	10	Karnataka
IN	11	Kerala
IN	12	Madhya Pradesh

Country	Region	Description
AR	00	Capital Federal
AR	01	Prov. Buenos Aires
AR	02	Capital Federal
AR	03	Buenos Aires
AR	04	Catamarca
AR	05	Córdoba
AR	06	Corrientes
AR	07	Entre Ríos
AR	08	Jujuy
AR	09	Mendoza
AR	10	La Rioja
AR	11	Salta
AR	12	San Juan

In this example, India Region Codes are shown on the left and Argentina Region Codes on the right.

## Set Address Validation Configuration Parameters

1. Log into the Determination and navigate to **System > CONFIGURATION**.
2. Change companies to the parent company in your Determination hierarchy. Select the company from the drop-down list in the upper right-hand corner of the page. In the example below, the example parent company is SAP Headquarters.
3. Set the parameters AV\_INTL\_TAXPROVIDER and AV\_US\_TAXPROVIDER parameters to the selected company and click **Submit**.

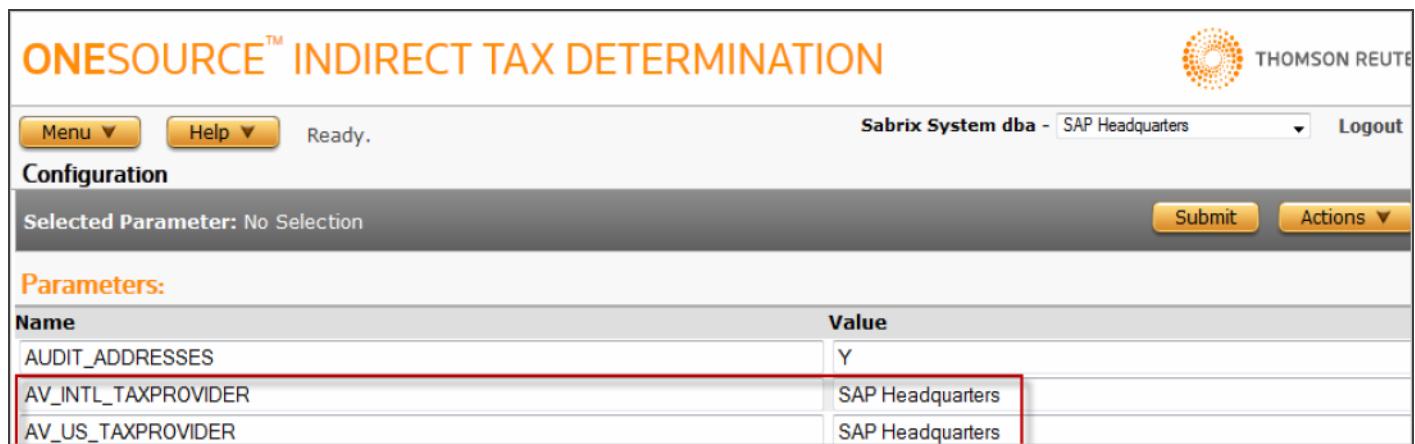

**ONESOURCE™ INDIRECT TAX DETERMINATION**

Menu ▾ Help ▾ Ready. **Sabrix System dba - SAP Headquarters** ▾ Logout

**Configuration**

**Selected Parameter:** No Selection **Submit** **Actions ▾**

**Parameters:**

Name	Value
AUDIT_ADDRESSES	Y
AV_INTL_TAXPROVIDER	SAP Headquarters
AV_US_TAXPROVIDER	SAP Headquarters

## Create Zone Aliases

1. Navigate to **Tax Data > Zones**.
2. Search for and select a country to create an alias (for example, Argentina).

**ONESOURCE™ INDIRECT TAX DETERMINATION**

Menu ▾ Help ▾ Ready. Sabrix System dba - SAP Headquarters ▾ Logout

**Zones**

Tax Data Type: International Tax Data ▾ Zone Name: ARGENTINA Zone Level: - Any Zone Level -

**Zones:**

Search Results: ARGENTINA ▾

**Zone Name**

- WORLD
- AFGHANISTAN (through) BHUTAN
  - AFGHANISTAN
  - ALAND ISLANDS
  - ALBANIA
  - ALGERIA
  - AMERICAN SAMOA
  - ANDORRA
  - ANGOLA
  - ANGUILLA
  - ANTARCTICA
  - ANTIGUA AND BARBUDA
- ARGENTINA

3. Once the desired country is selected, click the Alias tab.
4. Enter the desired aliases and click **Submit**. For example, you might create the following aliases in Argentina:

**ONESOURCE™ INDIRECT TAX DETERMINATION**

Menu ▾ Help ▾ Ready. Sabrix System dba - SAP Headquarters ▾ Logout

**Zones**

Selected Zone: ARGENTINA

Search Edit Alias Authorities

Show Parent Aliases:

Level Applied	Alias	Value	Type
Province ▾	02	CAPITAL FEDERAL	Full match ▾
Province ▾	03	BUENOS AIRES	Full match ▾
Province ▾	04	CATAMARCA	Full match ▾

*Alias* represents the code maintained in SAP. *Value* represents the name maintained in the Determination Zone Tree. In the example above, the selected Zone is Argentina. Always configure aliases at the Country level and apply each alias at the Province level.


# APPENDIX 1: OTHER FEATURES

## Data Popup Tool

The Data Popup Tool is a new feature for users needing to do field mapping or debugging to determine which tables and fields are available and populated with data within the current transaction you are testing. It is a valuable tool to determine issues with a transaction or identify additional fields that will work for future or current field mapping. This tool is to be used only in a test environment as a tool for analysis of the transaction as it will interrupt the transaction and pop-up within the transaction you are testing when a call is made to Determination for a tax calculation. There is a configuration table that you access to turn on the feature within the Reports and tools menu that will allow you to target the data based on a single journey or set of journeys that are used within the specific transaction. If multiple journeys are selected the screen will advance to the next journey once you get out of the current journey pop-up and will continue to do so until you have gone through the list of journeys that you selected and are used in the transaction,

Some transactions make many calls to Determination during the transaction: a ME21N Purchase Order is especially invasive in this respect and can cause the system to literally loop again and again through this pop-up feature and not let you out of the transaction. If this occurs, simply start a second session and change/ deactivate the popup tool and return to your prior session. Doing this delete process will allow you to proceed with the transaction without further issues. See screen shots below to access this feature, configure it, and view how it works.

Transaction Code: /N/IDT/DATA\_POPUP\_TOOL

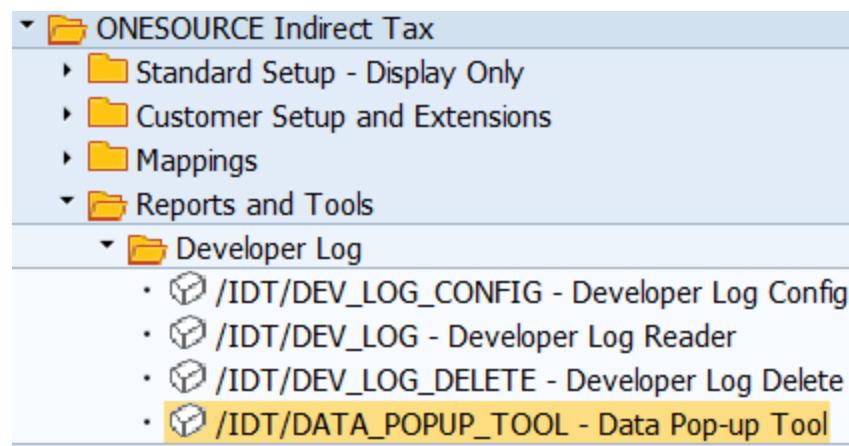

Actual Data Pop-Up Control Configuration Table			
SAP ...	Journey Name	User Name	Active
D03	/IDT/JOURNEY_HEADER_REQUEST	JAKET	<input type="checkbox"/>
D03	/IDT/JOURNEY_HEADER_REQUEST	JENNIFERH	<input checked="" type="checkbox"/>
D03	/IDT/JOURNEY_HEADER_REQUEST	NEELIMAK	<input checked="" type="checkbox"/>
D03	/IDT/JOURNEY_HEADER_REQUEST	RICKP	<input type="checkbox"/>
D03	/IDT/JOURNEY_ITEM_REQUEST	JAKET	<input type="checkbox"/>
D03	/IDT/JOURNEY_ITEM_REQUEST	NEELIMAK	<input type="checkbox"/>
D03	/IDT/JOURNEY_ITEM_REQUEST	RICKP	<input type="checkbox"/>
D03	/IDT/JOURNEY_NG_ITEM_REQUEST	JAKET	<input type="checkbox"/>
D03	/IDT/JOURNEY_NG_ITEM_REQUEST	NEELIMAK	<input type="checkbox"/>
D03	/IDT/JOURNEY_NG_ITEM_REQUEST	RICKP	<input type="checkbox"/>
D03	/IDT/JOURNEY_STANDARD_RESPONSE	JAKET	<input type="checkbox"/>
D03	/IDT/JOURNEY_STANDARD_RESPONSE	RICKP	<input type="checkbox"/>
D03	/IDT/JOURNEY_TAX_DATA_RESPONSE	JAKET	<input type="checkbox"/>
D03	/IDT/JOURNEY_TAX_DATA_RESPONSE	RICKP	<input type="checkbox"/>

Once in the screen you will be able to change it to change mode and add lines to the table for your username and activate the journey. Currently the tool is available for the below list of journeys. More journeys will be added to this tool in the future and a drop-down list added for easier use. To deactivate a given journey, just return to the menu and turn off the active button. Journeys currently available include:

- **Journey Header Request**
- **Journey Item Request**
- **Journey NG Item Request**
- **Journey Standard Response**
- **Journey Tax Data Response**

Next go to the desired transaction you wish to use this tool on and enter your data. When a call to Determination is made within the transaction the tool will activate and pop-up the data for the first journey selected.

Further instructions on how to use this tool and how the screen levels work is shown in the Installation and Programmers Guide.

## Reconciliation Extract Report

The ONESOURCE Indirect Tax Integration for SAP Reconciliation Extract enables an organization using the ONESOURCE Indirect Tax Integration for SAP for their tax calculations to extract the necessary data from the SAP FI module to use in the ONESOURCE Indirect Tax Reporting Reconciliation Report.


The Reconciliation Report in ONESOURCE Indirect Tax Reporting will compare the imported data from the SAP Reconciliation Extract with the data in Audit. The Reconciliation Report will indicate transactions missing in the ERP (SAP), transactions missing in Audit, as well as differences in tax amounts.

The following steps are necessary if you want to use the Reconciliation Extract Report:

### *Application Server Directory*

The reconciliation extract process can either write a file to the person's desktop (presentation server) or the SAP Application Server. If using the Application Server, it is recommended that a file directory is created on the SAP file system specifically for Reconciliation, and then mapped as a default. To do so follow these steps:

Transaction **AL11**:

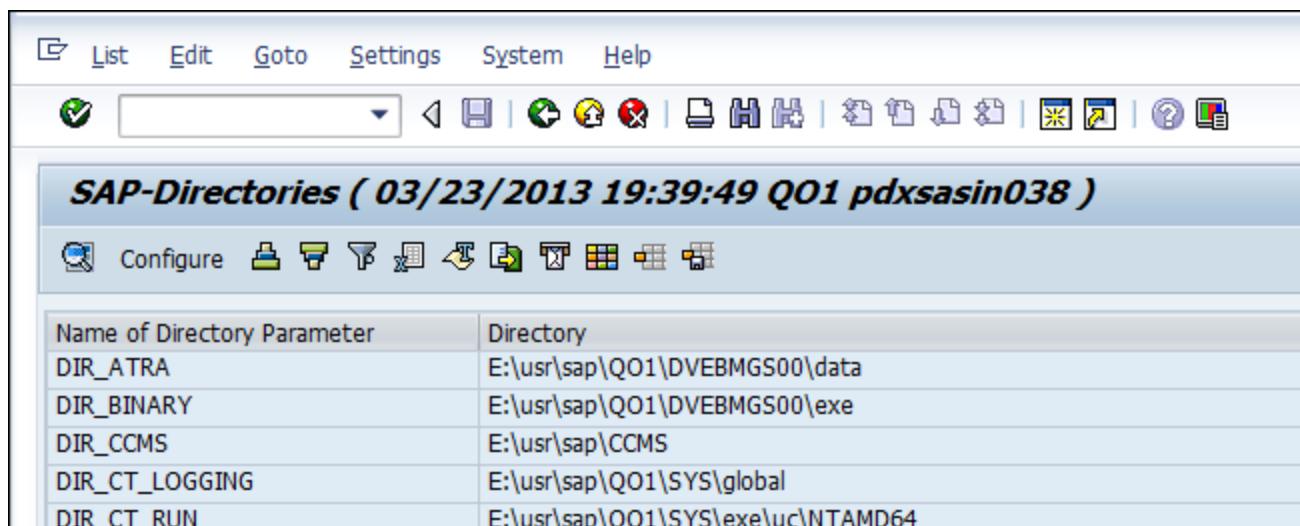

Click on **Configure** to add a new directory definition/path:

**User-Defined Directories**

Create   Delete   Save

Directory Name

Param. Name

ServerName

**Save** your entry.

Now that you have defined the directory you can also set it as a default in the Reconciliation Extract selection screen as follows:

Transaction **STVARV**:

Add a new entry for parameter name of **/IDT/RECON\_APP\_SERVER\_PATH** with the value of the server path you created in the previous step.

**Display Table TVARVC: Selection Variables**

Individual maintenance

Contents of Table TVARVC  Include changed entries in transport request


Parameter Selection Options

Name	Val.	Cas...
/IDT/RECON_APP_SERVER_PATH	E:\RECON	


## Adding Custom Fields to /IDT/D\_TAX\_DATA Table

A system user may have need to add other fields to the /IDT/D\_TAX\_DATA table for reporting or reconciliation processes. Their ABAP programmer can append the table with their own custom field and then use the field mapping table feature to be able to populate the new field per their needs. A simple procedure of appending the table is outlined below:

Transaction: **SE11**

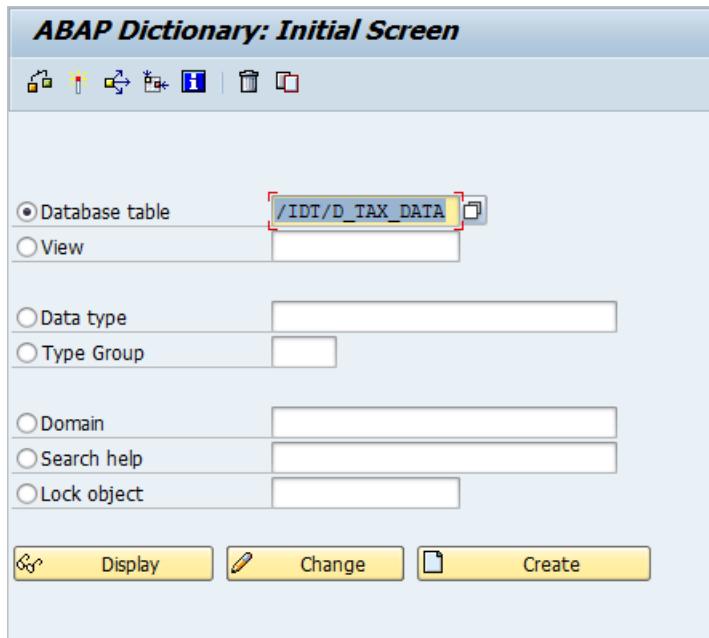

Select “Display”. Once in the table, use the “Append Structure (F5)” menu option.

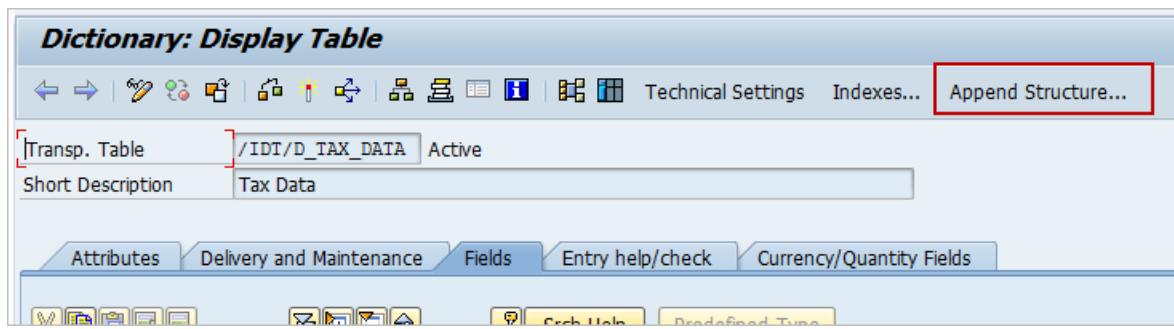

Create a new append in the customer's name space or using ZZ\* naming convention. Include the change in a transport:

Appends for /IDT/D_TAX_DATA		
Object Name	Status	Short text
ZZTEST	Active	Custom Append Test

Add custom fields as desired:

Dictionary: Change Append Structure														
Append Structure	ZZTEST	Active												
Short Description	Custom Append Test													
Attributes		Components	Entry help/check		Currency/quantity fields									
Predefined Type  Show Append Obj <span>1 / 1</span>														
Component	Key	Ini...	Typing Method	Component Type	Data Type	Length	Deci...	Short Description						
ZZMYFIELD	<input type="checkbox"/>	<input type="checkbox"/>	Types	▼ TVARV_VAL	CHAR	45		0 ABAP/4: Selection value						

Save and activate the changes.

The newly added fields now can be used in the Global Next Flexible Field Mapper to which to map data.

## Special Note on VF06 Background Batch Jobs

When creating an invoice in VF01, there are 2 entries in the XML logs, the regular one and the one that posts to audit. If the invoices are created in the background in VF06, only one entry is listed in the log (the one that posts to audit) and the transaction code column does not populate the transaction code.

This can be confusing if a user is using the information on the transaction code. A key problem is that SY-TCODE is blank for background jobs. There is generally no screen and thus no need for a transaction code in background jobs. This is a known limitation in SAP. Customers who use the SY-TCODE field must consider that SAP will return a NULL value at times. They can add a fall back custom field mapping using a constant for situations when SAP returns a null value.

## APPENDIX 2: REFERENCES

This section lists all customer facing Journeys, Routes, Bases and Tables with an explanation of their purpose and use.

### List of Journeys

Most Journeys are used in the field mapping process to assist in determining for which business process what fields should be used for taxability determination. Some Journeys are used internally for unique treatment of a process, like Freight and Plants Abroad for example, these are mostly likely not used in the field mapping.

JOURNEY	DESCRIPTION
/IDT/JOURNEY_HEADER_REQUEST	This Journey manages header data going from SAP to Determination. In field mappings this Journey passes data to link specific header SAP fields to corresponding invoice level XML elements of Determination.
/IDT/JOURNEY_HEADER_REQUEST_GM	This Journey manages header data going from SAP to Determination for the Goods Movement product transactions. In field mappings this Journey passes data to link specific header SAP fields to corresponding invoice level XML elements of Determination for materials movement transactions in MM.
/IDT/JOURNEY_HEADER_REQ_BR_GM	This Journey manages the header data going from SAP to Determination for the Brazil material transaction MBOA for receiving inbound transaction on Intra Co STO process.
/IDT/JOURNEY_GET_CONDITION_DTL	This journey is used internally and gets the relevant tax data from the KONV table and uses that for getting the taxes on the NF document when a PGI is done on the delivery document. Brazil functions only.
/IDT/JOURNEY_ITEM_REQUEST	This Journey manages header and item data going from SAP to Determination. In field mappings this Journey passes data to link specific header and item SAP fields to corresponding line level XML elements of Determination.

/IDT/JOURNEY_ITEM_REQ_BR_GM	This Journey manages the item data going from SAP to Determination for the Brazil material transaction MBOA for receiving inbound transaction on Intra Co STO process.
/IDT/JOURNEY_ITEM_REQUEST_GM	This Journey manages header and item data going from SAP to Determination for the Goods Movement product transactions. In field mappings this Journey passes data to link specific header and item SAP fields to corresponding line level XML elements of Determination for materials movement transactions in MM.
/IDT/JOURNEY_NG_ITEM_REQUEST	This Journey manages header and item data going from non-group transactions of SAP to Determination. In field mappings this Journey passes data to link specific header and item SAP fields to corresponding line level XML elements of Determination.
/IDT/JOURNEY_NG_ITEM_SERV_ENTR	This Journey manages item level data going from SAP to Determination for the specific data in Service Entry Sheets within MM PO process. In field mappings this Journey passes data to line specific line-item SAP fields to corresponding line level XML elements of Determination for Service Entry Sheet charges.
/IDT/JOURNEY_MULTI_ACC_SERVICE	This journey manages the multi account assignment as it is used on a service entry sheet line-item.
/IDT/JOURNEY_TAX_TAB_RESPONSE	This Journey manages data coming from Determination to SAP. It collects the tax calculation results from the XML and will use the configurable field mappings to link specific Determination fields to corresponding fields in table /IDT/D_TAX_DATA for later use in downstream processes such as invoice printing and reporting.

/IDT/JOURNEY_STANDARD_RESPONSE	<p>This Journey manages data coming from Determination to SAP. It collects the tax calculation results from the XML and distributes them in condition value formulas where needed. It will use the configurable field mappings to link specific Determination fields to corresponding SAP fields in table KONV.</p> <p>NOTE: This mapping is provided for backwards compatibility and should not be used.</p>
/IDT/JOURNEY_AUDIT_UPD_DB_BILL	<p>This Journey manages the update to the Determination audit database for Billing documents. At time of SAP finishing posting to the General Ledger account a call will be made to Determination for persisting the tax liability in audit. The process will use the latest calculation done and sets the IS_AUDITED flag to TRUE, the FISCAL_DATE to the posting date of the Billing document, the INVOICE_NUMBER and UNIQUE_INVOICE_NUMBER and the GROSS_AMOUNT in company code currency. It also may set the IS_CREDIT flag to TRUE/FALSE to negate amounts and make the audit reports add up correctly.</p> <p>NOTE: In some cases, a certain value isn't known till the document has been posted to the G/L; e.g. the legal document number required in some countries. This Journey can be used to write the value to audit, but it would not be recommended to use such a value for taxability rules as the value would not be available during calculations.</p>
/IDT/JOURNEY_AUDIT_UPD_DB_SETL	<p>This Journey manages the update to the Determination audit database for both Settlement Management sales and purchase billing documents. This journey is identical to /IDT/JOURNEY_AUDIT_UPD_DB_BILL for Settlement Management Audit documents. (New Journey from Release 6.6.0.0 )</p>

/IDT/JOURNEY_AUDIT_UPD_DB_GL	<p>This Journey manages the update to the Determination audit update database for G/L documents when there is no billing document. It is using the route /IDT/ROUTE_UPDATE_AUDIT_DB and is used to add information to the update to audit table and report for noting that status of an entry that may not have been posted yet to the audit database.</p>
/IDT/JOURNEY_AUDIT_SAVE_FRM_GL	<p>This Journey manages the update to the Determination audit database for G/L (LIV/FI) documents. At time of SAP finishing posting to the General Ledger account a call will be made to Determination for persisting the tax liability in audit. The process will use the latest calculation done and sets the IS_AUDITED flag to TRUE, the FISCAL_DATE to the posting date of the G/L document, the INVOICE_NUMBER and UNIQUE_INVOICE_NUMBER and the GROSS_AMOUNT in company code currency. It also may set the IS_CREDIT flag to TRUE/FALSE to negate amounts and make the audit reports add up correctly.</p> <p>NOTE: In some cases, a certain value isn't known till the document has been posted to the G/L, i.e. the legal document number required in some countries. This Journey can be used to write the value to audit, but it would not be recommended to use such a value for taxability rules as the value would not be available during calculations.</p>
/IDT/JOURNEY_AUDIT_SAVE_TAX_UP	<p>This journey manages the update to the audit database and will be used for all manual tax scenarios (calculate tax = " ") and down payments. To update the audit database, this will use the last tax calculation make changes to a few fields like override amount and then send that to audit.</p>
/IDT/JOURNEY_AUDIT_RESPONSE	<p>This Journey manages the response of the update to the Audit Database. It determines if an update to the Audit Database is successful from the response message and passes a flag with that information to be stored in table /IDT/D_AUDIT_STA.</p>

/IDT/JOURNEY_AUDIT_SAVE	This Journey saves the data of the last tax calculation call at the time of saving the invoice document in table /IDT/D_AUDIT_REC for later use in the audit update call, cancellations, and other processes. This journey assumes calculate tax = X
/IDT/JOURNEY_BRAZIL_SD_ADJUST	This Journey adjusts the Brazil SD document and process when use to set the application area from TX to V. This was done to allow the system to utilize the standard Nota Fiscal mapping logic in SD for Brazil
/IDT/JOURNEY_CHECK_AUDIT_MESS	This Journey checks the audit message and adjusts the call to audit. It does a double check to make sure the call is for a final invoice.
/IDT/JOURNEY_GM_RESPONSE	This Journey manages the response of the update to the Audit Database for Goods Movement transactions in the Goods Movement product.
/IDT/JOURNEY_US_SPECIAL_LOGIC2	<p>This Journey manages the AP logic for countries like US, and PR by switching the company role for the Vendor Charged Tax and offsetting the tax lines for Self-Accrual taxes.</p> <p>NOTE: Customers most likely will not use this in the field mappings; the default is delivered by Thomson Reuters.</p>
/IDT/JOURNEY_FREIGHT	<p>This Journey manages the Freight logic based on the configurable Freight condition sub-total. It will create a shadow line as a related line to the product line. See the Configuration Guide for more details.</p> <p>NOTE: This journey is not used in the field mappings.</p>
/IDT/JOURNEY_FREIGHT_LIV	This Journey manages the Freight logic based on the configurable Freight condition sub-total specifically for functions that are different within the MIRO transaction. It will create a shadow line as a related line to the product line.

/IDT/JOURNEY_PLANTS_ABROAD	<p>This Journey manages the logic for Plants Abroad based on the billing types maintained in table /IDT/D_PLNTS_ABD. For these billing types a Seller and Buyer call is made for the one SD Invoice. Billing type WIA has been added as a default.</p> <p>NOTE: This journey is not used in the field mappings.</p>
/IDT/JOURNEY_FB05_RESPONSE	This Journey is to handle the complexity of the transactions that can have cash discounts.
/IDT/JOURNEY_NG_ITEM_FB05	This Journey manages header and item data going from non-group cash discount transactions of SAP to Determination. In field mappings this Journey passes data to link specific header and item SAP fields to corresponding line level XML elements of Determination.
/IDT/JOURNEY_FB05_COMPANY_ROLE	This Journey manages the company role for the FB05 transaction logic.
/IDT/JOURNEY_NG_ITEM_DOWN_PAYM	This Journey is to handle the complexity of the down payment transactions.
/IDT/JOURNEY_NG_ITEM_SERV_ENTR	This Journey is to handle the complexity of the transactions with service entry sheets.
/IDT/JOURNEY_SELF_ASSESSMENT	This Journey is used to handle the special fields needed in tandem with the table transaction /IDT/OFFSET_CONFIG to handle the offsetting side entry needed for self-assessment transactions.
/IDT/JOURNEY.Utility_RESPONSE	A Journey that allows a user-exit to read tax result data before the tax data table has been updated. This is not used in any standard function but can be used by a customer for custom user exit data that needs to be retrieved from the response prior to posting to the tax data table.
/IDT/JOURNEY_MULTI_ACC_ASSIGN	This journey is used to handle the complexity of the logic needed for multiple account assignment within a single PO line-item.

/IDT/JOURNEY_INDIA_STO_INB	This journey is used to handle the complexity of the logic needed for the J_1IG_INV inbound invoice for STO transaction.
/IDT/JOURNEY_ADDRESSES	This journey is used to handle the complexity of the logic needed for collecting address data.
/IDT/JOURNEY_ITEM_REQ_DT_RC	This Journey manages item data going from SAP to Determination for Deferred taxes Reverse charge scenarios. (New Journey from Release 6.6.0.0)

## List of Routes

Routes can be basically split into two categories; Group and Non-Group. Group Routes are based on transactions which use pricing procedures (SD) or calculation schemas (PO), where Non-Group Routes are based on transactions which use tax procedures (LIV/FI). Routes can be used in the field mapping if desired.

ROUTE	DESCRIPTION
/IDT/ROUTE_GROUP_SALES	This Route handles the complexity of calculating tax unique to SD sales transactions.
/IDT/ROUTE_GROUP_BILLING_GEN	This Route handles the complexity of calculating tax unique to SD billing transactions.
/IDT/ROUTE_GROUP_DELIVERY	This Route handles the complexity of calculating tax unique to delivery transactions. This was added to support Brazil STO process for Nota Fiscal based on the delivery document.
/IDT/ROUTE_GROUP_BILLING_PA	This Route handles the complexity of calculating tax unique to SD Plants Abroad billing transactions. Table /IDT/D_PLNTS_ABD needs to be maintained with the relevant Billing Types for Plants Abroad, billing type WIA has been added as a default.
/IDT/ROUTE_GROUP_PURCHASING	This Route handles the complexity of calculating tax unique to purchasing transactions using a calculation schema.

/IDT/ROUTE_NON_GROUP_DOC_DNF	This Route handles the complexity of calculating tax unique to the delivery documents for Brazil Nota Fiscal.
/IDT/ROUTE_NON_GROUP_DOC_LIV	This Route handles the complexity of calculating tax unique to LIV transactions.
/IDT/ROUTE_NON_GROUP_DOC_PUR	This Route is in support of the TAXES button and copies the taxes from the conditions tab and replicates the data in the taxes button so that both conditions tab and taxes button are in agreement.
/IDT/ROUTE_NON_GROUP_DOC_AP	This Route handles the complexity of calculating tax unique to FI AP transactions.
/IDT/ROUTE_NON_GROUP_DOC_AR	This Route handles the complexity of calculating tax unique to FI AR transactions.
/IDT/ROUTE_NON_GROUP_DOC_FI	This Route handles the complexity of calculating tax unique to FI processes where there is no Vendor or Customer in the transaction.
/IDT/ROUTE_NON_GROUP_DOC_GM_BR	This Route handles the complexity of calculation tax unique to Brazil STO material receiving transaction using MBOA transaction for inbound process Nota Fiscal data
/IDT/ROUTE_UPDATE_AUDIT_DB	This Route handles the complexity of updating the Audit Database. It initiates asynchronous update process (V2) after a G/L document posting has been successfully done in SAP and will trigger the audit call.
/IDT/ROUTE_NON_GROUP_DOC_DT	This Route is to handle the complexity of transactions with deferred tax.
/IDT/ROUTE_NON_GROUP_DOC_DT_RC	This Route is to handle the complexity of transactions with deferred tax for Reverse charge scenarios. (New route from release 6.6.0.0)
/IDT/ROUTE_NON_GROUP_DOC_FB5	This Route is to handle the complexity of the transactions that can have cash discounts.
/IDT/ROUTE_NON_GROUP_DOC_A_GL	This Route is to handle the logic for audit updated based on the amounts in the G/L document in SAP.

/IDT/ROUTE_NON_GROUP_DOC_DP	This Route is to handle the complexity of transaction with Down payments.
/IDT/ROUTE_NON_GROUP_DOC_SES	This Route is to handle the complexity of transactions with service entry sheets.
/IDT/ROUTE_NON_GROUP_DOC_INSTO	This Route is to handle the complexity of the J_1IG_INV transaction for intra-company STO process for the inbound invoice.
/IDT/ROUTE_GROUP_BILLING_SM_SD	This Route is to handle the calculation of taxes for Settlement Management Sales Rebates process. (New route from release 6.6.0.0)
/IDT/ROUTE_GROUP_BILLING_SM_MM	This Route is to handle the calculation of taxes for Settlement Management Purchase Rebates process. (New route from release 6.6.0.0)

## List of Bases

Bases represent a source or target in the field mapping of a tax request and response. They either represent an entity in SAP or a Determination XML structure such as Batch, Invoice, Line, or Tax. Some complex XML structures like User Attributes, Quantities, Registrations, Currency Conversions, etc. require special processing described at the end of this section. Not all of the sources are available for all Journeys.

SOURCE BASES		
Base	Description	Journey supported
SAP_HEADER	Fields from the following SAP document header tables:  BKPF, EKKO, ESSR, KNA1, LFA1, T001, T001Z, T180, TVAK, TVAP, TVFK, TVKO, TVTA, VBAK, VBKD, VBUK, VBRK, KOMK, CALC_HDR*, J_1BBRANCH, J_1IMOVEND, J_1IMOCUST, J_1IMOCOMP, MKPF, MSEG, T156, DM07M, VM07M	/IDT/JOURNEY_HEADER_REQUEST  /IDT/JOURNEY_HEADER_REQ_BR_GM  /IDT/JOURNEY_FB05_COMPANY_ROLE
	BKPF (FI/LIV)	/IDT/JOURNEY_AUDIT_UPD_DB_GL
	VBRK (SD)	/IDT/JOURNEY_AUDIT_UPD_DB_BILL
	T001 for both processes	/IDT/JOURNEY_AUDIT_UPD_DB_SETL
	MKPF, BKPF, KOMK, KOMP, MSEG, EKKO, LFA1, CALC_HDR	/IDT/JOURNEY_HEADER_REQ_BR_GM

SAP_ITEM	Fields from the following SAP document <b>item</b> tables:  BSEG, CSKS, DRSEG, EINA, EINE, EKNU, EKPO, KOMP, KOMV_INDEX, MAKT, MARA, MARC, MARD, MBEW, MT06E, MVKE, PRICE_COND, T001W, T001Z, TVAP, VBAP, VBAPF, VBRP, VBUP, CALC_ITEM*, J_1BBranch, J_1IMOVEND, J_1IMOCUST, J_1IMOCOMP, MKPF, MSEG, T156, DM07M, VM07M  <b>Header fields:</b> Any field listed in the SAP_HEADER section above, use prefix HDR-> when mapping a header table at line level	/IDT/JOURNEY_ITEM_REQUEST  /IDT/JOURNEY_NG_ITEM_REQUEST  /IDT/JOURNEY_ITEM_REQ_BR_GM  /IDT/JOURNEY_NG_ITEM_DOWN_PAYM  /IDT/JOURNEY_NG_ITEM_FB05  /IDT/JOURNEY_NG_ITEM_SERV_ENTR
	BSEG (FI/LIV)	/IDT/JOURNEY_AUDIT_UPD_DB_GL
	VBRP (SD)	/IDT/JOURNEY_AUDIT_UPD_DB_BILL
	WBRP (SD, MM)	/IDT/JOURNEY_AUDIT_UPD_DB_SETL
	MKPF, MSEG, EKPO, KOMP, LFA1, MBEW, J_1BBranch, LIKP	/IDT/JOURNEY_ITEM_REQ_BR_GM
SAP_FIELD	SYST  GC_XS_FALSE – translates an SAP check box value to a XSD true/false value  GC_VERSION – represents the XSD	All
DET_TAX	All fields in the Tax level of the Determination response (OUTDATA) message	/IDT/JOURNEY_STANDARD_RESPONSE  /IDT/JOURNEY_TAX_TAB_RESPONSE
CONSTANT	Any constant value	All

TARGET BASES		
Base	Description	Journey supported
DET_BATCH	All fields in Batch level of Determination request (INDATA) message	/IDT/JOURNEY_HEADER_REQUEST /IDT/JOURNEY_FB05_COMPANY_ROLE /IDT/JOURNEY_HEADER_REQ_BR_GM
DET_INVOICE	All fields in Invoice level of Determination request (INDATA) message	/IDT/JOURNEY_HEADER_REQUEST /IDT/JOURNEY_FB05_COMPANY_ROLE /IDT/JOURNEY_HEADER_REQ_BR_GM /IDT/JOURNEY_AUDIT_UPD_DB_BILL /IDT/JOURNEY_AUDIT_UPD_DB_GL
DET_LINE	All fields in the Item level of the Determination request (INDATA) message	/IDT/JOURNEY_ITEM_REQUEST /IDT/JOURNEY_NG_ITEM_REQUEST /IDT/JOURNEY_ITEM_REQ_BR_GM /IDT/JOURNEY_NG_ITEM_DOW_N_PAYM /IDT/JOURNEY_NG_ITEM_FB05 /IDT/JOURNEY_NG_ITEM_SERV_ENTR
SAP_TAX_LINE	All fields in table /IDT/D_TAX_DATA, including custom appended fields	/IDT/JOURNEY_TAX_TAB_RESPONSE /IDT/JOURNEY_FB05_RESPONSE
	All fields of the SAP pricing lines as defined in structure KOMV_INDEX  NOTE: used for backwards compatibility only	/IDT/JOURNEY_STANDARD_RESPONSE

SPECIAL PURPOSE OPERANDS		
Operand	Description	Journey supported
CALC_HDR	ROLE, EXTERNAL_COMPANY_ID, UNIQUE_INVOICE_NUMBER, TAX_CATEGORY	/IDT/JOURNEY_HEADER_REQUEST
CALC_ITEM	DET_TAX_CODE, IS_EXEMPT, AMOUNT, QUANTITY, IS_CREDIT	/IDT/JOURNEY_ITEM_REQUEST /IDT/JOURNEY_NG_ITEM_REQUEST
PARTNER_TAB	Used to reference a partner address in field mappings. Can be used in combination with partner function type.	/IDT/JOURNEY_HEADER_REQUEST /IDT/JOURNEY_ITEM_REQUEST /IDT/JOURNEY_NG_ITEM_REQUEST
HDR->	Pointer use in Item level request mapping to indicate that the field used is at header level, i.e. HDR->T001W-WERKS would indicate the plant from the header table to be mapped at the item level.	/IDT/JOURNEY_ITEM_REQUEST /IDT/JOURNEY_NG_ITEM_REQUEST /IDT/JOURNEY_FB05_RESPONSE

ANCESTOR->	<p>Pointer used in response mapping to indicate that the field used is at a higher level in the structure, i.e. ANCESTOR-&gt;ANCESTOR-&gt;CALLING_SYSTEM_NUMBER would be used to map from Invoice level field in the tax data level.</p> <p>NOTE: At this time we don't support mapping from the BATCH level of the Determination XML, all fields are available on the INVOICE level too.</p>	<p>/IDT/JOURNEY_TAX_TAB_RESPONSE</p> <p>/IDT/JOURNEY_STANDARD_RESPONSE</p> <p>/IDT/JOURNEY_FB05_RESPONSE</p>
ITEMS->	<p>Pointer used to determine at the header level a field that is stored at the line-item level in order to pass that to the request.</p>	/IDT/JOURNEY_HEADER_REQUEST

XSD TABLES		
Table	Description	Journey supported
USER_ELEMENT	<p>A custom field in the XSD comprised of the XML element USER_ELEMENT and field ATTRIBUTE#, where # is any number between 1-40 at Invoice or Item level.</p> <p>NOTE: Attributes 41-50 are reserved by Thomson Reuters.</p>	<p>/IDT/JOURNEY_HEADER_REQUEST</p> <p>/IDT/JOURNEY_ITEM_REQUEST</p> <p>/IDT/JOURNEY_NG_ITEM_REQUEST</p> <p>/IDT/JOURNEY_STANDARD_RESPONSE</p> <p>/IDT/JOURNEY_TAX_TAB_RESPONSE</p>

REGISTRATIONS	A structure of registration numbers for different roles; SELLER_ROLE, BUYER_ROLE, MIDDLEMAN_ROLE.	/IDT/JOURNEY_HEADER_REQUEST /IDT/JOURNEY_ITEM_REQUEST /IDT/JOURNEY_NG_ITEM_REQUEST
QUANTITIES	A complex structure to represent a list of quantities and unit of measures.	/IDT/JOURNEY_ITEM_REQUEST /IDT/JOURNEY_NG_ITEM_REQUEST
CURRENCY_CONVERSION	Represents a result set of one or two currency conversion steps in the TAX block of the tax response.	/IDT/JOURNEY_STANDARD_RESPONSE /IDT/JOURNEY_TAX_TAB_RESPONSE

SPECIAL PURPOSE OPERANDS IN TABLES	
Operand	Description
NAME	A field value within a table like NAME=ATTRIBUTE1
ROW	A field value to point to a specific place in a table i.e. ROW=3 would point to the third row
ADD	An action, i.e. to add a row to the table
CREATE_IF_NOT_EXIST	A control flag to only add the mapping if none already exists

## List of Delivered Tables

For reference below table lists all Thomson Reuters delivered SAP tables.

### Configuration Tables

Most of the configuration tables are accessible via the User Menu provided with a few exceptions which are noted.

TABLE	DESCRIPTION
/IDT/C_DET_TAX_T	Determination Tax Code
/IDT/C_FI_CONTRL	FI Control Process: Custom
/IDT/C_LOG_CONFI	Log Configuration: Custom
/IDT/C_PROXYIES	Configuration for Proxy Call
/IDT/C_ROLE_OVER	AP Company Role Override and Special Logic
/IDT/C_TAX_REL	Tax Code Relevancy
/IDT/C_TAX_TYPE	Determine condition types for taxes
/IDT/D_ADDR_SURC	Non-partner function address sources
/IDT/D_ADDR_TYPE	Logical address types for ONESOURCE Tax Determination
/IDT/D_ADDRESSES	Match address sources to logical addresses types
/IDT/D_AUTO_JRNY	Automatically processed Journeys for each Route
/IDT/D_BASE_MAP	Base Maps
/IDT/D_CASH_DISC	Match SAP tax code to Determination Tax Code for Cash Discounts at time of payment calculations. Note this table is not in standard menu yet. Use SM30 transaction to maintain at this point.
/IDT/D(CG_ASSIGN	Country group assignment
/IDT/D_COUNTRY_G	Country groups
/IDT/D_DET_TAX_T	Determination Tax Type
/IDT/D_FI_CONTRL	FI process control configuration
/IDT/D_FIELD_MAP	Configurable field mappings
/IDT/D_GENERAL	General configuration option values table
/IDT/D_GRP_BUKRS	List company codes that should use non-grouped tax calc
/IDT/D_IS_EXEMPT	Configure exempt transactions

/IDT/D_LOG_CONF1	Log configuration
/IDT/D_NEG_TTYP	Tax scenarios to negate the tax values
/IDT/D_PART_SA	Partial Self-Assessment table
/IDT/D_PLNTS_ABD	Billing documents types that signify a plants-abroad process
/IDT/D_PROXIES	Configuration for Proxy Call
/IDT/D_ROLE_OVER	AP company role override
/IDT/D_ROUTE_GRP	Route - Route Group index
/IDT/D_ROUTES	Configuration to switch on Routes
/IDT/D_SEL_ROUTE	Select route for SD and purchasing
/IDT/V_TAX_FILTE	Tax Filters
/IDT/D_TAX_REL	Tax Code Relevancy
/IDT/D_TAX_TYPE	Determine condition types for taxes
/IDT/D_TXJCD_DEF	Tax Jurisdiction Code Definitions for Country
/IDT/D_VERSION	IDT Integration Version
/IDT/D_WSDL	WSDL Data of the Proxy Structure
/IDT/GM_MVMTTYPE	Maintain Internal Goods Movement Types
/IDT/S_FI_CTRL	FI Control Process: Standard
/IDT/S_LOG_CONF1	Log Configuration: Standard
/IDT/D_TX_SUM_GP	IDT Tax Summarization Table
/IDT/V_ADDR_SURC	SAP Non-Partner Function Address Sources: Custom
/IDT/V_ADDR_TYPE	Determination Address Types: Standard
/IDT/V_ADDRESSES	Address Mappings: Custom
/IDT/V_ADR_PRIVA	Address Mappings: Standard

/IDT/V_AJ_PRIVAT	Auto Processed Journeys for Route: Standard
/IDT/V_AS_PRIVAT	SAP Non-Partner Function Address Sources: Standard
/IDT/V_AUTO_JRNY	Auto Processed Journeys for Route: Custom
/IDT/V_BASE_MAP	Base Mappings: Standard
/IDT/V(CG_ASSIGN	Country Group Assign Standard
/IDT/V(CG_ASSIGN_N	Country Group Assignment View
/IDT/V_COUNTRY_G	Country Group Standard
/IDT/V_FM_PRIVAT	Field Mappings: Standard
/IDT/V_FIELD_MAP	Field Mappings: Custom
/IDT/V_GENERAL	General Configuration Values
/IDT/V_GM_MVTTYPE	Goods Movement types
/IDT/V_NEG_TTYP	Negate Tax Types: Standard
/IDT/V_NEG_TTYPE	Negate Tax Types: Custom
/IDT/V_PLNTS_ABD	Plants Abroad Billing Type
/IDT/V_RG_PRIVAT	Route Groups: Standard
/IDT/V_ROUTE_GRP	Route Groups: Custom
/IDT/V_ROUTES	Configuration to Switch on Routes
/IDT/D_PRODUCTS	List of possible products
/IDT/V_SEL_ROUTE	Select Route for SD and Purchasing Configuration
/IDT/V_TAX_SUM_C	IDT Tax Summarization Configuration View
/IDT/V_VERSION	IDT Integration Version
/IDT/D_WS	WS Security Configuration for Proxy
/IDT/D_DYN_PROG	Dynamic Program Index

/IDT/D_ACT_CNTRL	Actual Data Pop-Up Control Configuration Tables
/IDT/D_DL_CONFIG	Developer Log Configuration: Custom
/IDT/D_STRUCTS	Data Dictionary objects for Journey source and target structure. This is a behind the scenes table that is not made available through the main menu and is pre-populated with the transport of the system configuration.
/IDT/D_SR_AD_MAP	Configurable Source address mappings
/IDT/D_PROXYGRPS	Used to establish the three options for a proxy group code, blank, CL, OP

## Transaction Tables

Transaction tables can hold a considerable amount of data depending on your business processes and system configurations. You should monitor growth of these tables and manage them as part of your archiving and/or purging process.

ROUTE	DESCRIPTION
/IDT/D_AUDIT_REC	Record of last Determination calculation request messages for document for later use in the audit update call, cancellations, and other processes. Archiving should be tied to your document retention process.
/IDT/D_AUDIT_STA	Status of messages for audit DB. Archiving can be managed as part of month end close process.
/IDT/D_LOG	Log for tax calculations based on log configuration settings. Archiving can be managed as part of month end close process.
/IDT/D_DEV_LOG	Indirect tax interface developers log
/IDT/D_TAX_DATA	Table that holds additional Tax Data information for a given document in support of invoice printing and downstream processes. This table is tied to the transaction document and should be managed for archiving based on the leading documents archiving.

/IDT/D_INDIA_STO	Table holds additional tax data information from the outbound invoice on STO process and is temporarily stored and used for the inbound invoice using transaction code J_1IG_INV.
------------------	---

## Reserved Attributes

Thomson Reuters reserved attributes 41-50 of the Invoice and Line fields for internal use. The following table is a list of the standard attributes that are already mapped. Customers can't make use of Attributes 41-50.

ATTRIBUTE	USED FOR
INVOICE.USER_ELEMENT.ATTRIBUTE41	TAX CATEGORY OF 0 OR 1
INVOICE.USER_ELEMENT.ATTRIBUTE50	PLANTS ABROAD - CONSTANT "PA"
LINE.USER_ELEMENT.ATTRIBUTE42	G/L ACCOUNT NUMBER
LINE.USER_ELEMENT.ATTRIBUTE43	COST CENTER
LINE.USER_ELEMENT.ATTRIBUTE44	CREDIT/DEBIT FLAG (S, H)/ GM - Used in Goods Movement Program  Also used at invoice level to note the use of both I1 and U1 driver tax codes on a document for FB08 proper document reversals.
LINE.USER_ELEMENT.ATTRIBUTE45	ROUTE NAME
LINE.USER_ELEMENT.ATTRIBUTE46	SAP TAX CODE for Item and NG_Item Journey/ TAX CODE OF ORIGINAL DOCUMENT FOR CASH DISCOUNTS AT TIME OF PAYMENT CALCULATION
LINE.USER_ELEMENT.ATTRIBUTE47	US-specific configuration that applies to the line.
LINE.USER_ELEMENT.ATTRIBUTE49	Used for (Sequential Number of Account Assignment) for item request journey for SES - /IDT/JOURNEY_NG_ITEM_SERV_ENTR.
LINE.USER_ELEMENT.ATTRIBUTE50	DIVISION/ BUSINESS AREA (depending on module)

## List of Transaction Codes

Below is a list of the transaction codes added to the system for the IDT integration tables and processes. This list can be used by security personnel in order to assign transactions to roles for security authorizations.

TRANSACTION CODE	USED FOR
/IDT/SELECT_ROUTE_V	Select Route for SD and Purchasing View Only
/IDT/AUTO_JOURNEYS_V	Automatically Processed Journeys View Only
/IDT/ROUTE_GROUP_V	Route Groups View Only
/IDT/ADDRESS_TYPES_V	Address Types View Only
/IDT/ADDRESS_SOURC_V	Address Sources View Only
/IDT/LOG_CONFIG_V	Log Configuration View Only
/IDT/NEG_TAX_TYPE_V	Negate Direction of Tax Types View Only
/IDT/FI_CONTROL_V	FI Process Control Configuration View Only
/IDT/COUNTRY_G_V	Country Groups View
/IDT/CG_ASSIGN_V	Country Group Assignment View
/IDT/BASE_MAPPING_V	Base Mappings View Only
/IDT/FIELD_MAPPING_V	Field Mappings View Only
/IDT/ADDRESS_MAP_V	Address Mapping View Only
/IDT/PROXY_CONFIG	ONESOURCE Proxy Configuration
/IDT/LOG_NUMBR_RANGE	Log Number Range
/IDT/WS	Web Service Security Configuration
/IDT/LOG_CONFIG	Configure Logs
/IDT/ROUTE_CONFIG	Route Configuration
/IDT/DETER_COND_TYPE	Determine Condition Type for Taxes
/IDT/ROUTE_GROUP	Route Groups

/IDT/NEG_TAX_TYPE	Negate Direction of Tax Types
/IDT/FI_CONTROL	FI Process Control Configuration
/IDT/FIELD_MAPPINGS	Field Mappings
/IDT/ADDRESS_MAPPING	Address Mapping
/IDT/COUNTRY_GROUPS	Country Groups
/IDT/CNTRY_GRP_ASSIG	Country Group Assignment
/IDT/TAX_SUM_CONFIG	Configuration for Tax Summarization
/IDT/EXEMPT_SETTINGS	Tax Exemption Settings
/IDT/GEN_CONFIG_VALS	General Configuration Values
/IDT/DET_TAX_CODE	SAP Tax Code/Det Tax Code Index
/IDT/CASH_DISCOUNT	Cash Discount/Det Tax Code Index
/IDT/US_LOGIC	US Specific Logic
/IDT/OFFSET_CONFIG	Offset tax line configuration
/IDT/PLANTS_ABROAD	Plants Abroad Billing Types
/IDT/TAX_CODE_REL	Tax Code Relevancy
/IDT/AUTO_JOURNEYS	Automatically Processed Journeys
/IDT/ADDRESS_SOURCES	Address Sources
/IDT/LOG	Log Reader
/IDT/LOG_ARCHIVE	Log Archival – Delete/Export to ZIP File (used for both foreground and background processing)
/IDT/AUDIT_DATABASE	Audit Database Transactions Update used for foreground processing
/IDT/RECON_EXTRACT	ERP Reconciliation Extract Report
/IDT/TAX_DATA_RPT	Tax Data Report

/IDT/TAX_FILTERS	Tax Filters Configuration
/IDT/VERSION	Global Next Product Version
/IDT/WS	Web Service Security Configuration

## Reconciliation Extract Program References

### Reconciliation Extract Mapped from SAP

Below table shows the mapping from SAP to ONESOURCE Indirect Tax Reconciliation Extract Output.

OUTPUT FIELD NAME	SAP FIELD NAME	TABLE FIELDNAME
External Company ID	SAP company code	BKPF-BUKRS
Host System	SAP system name (e.g. CO3)	SY-SYSID
Calling System	SAP client number	SY-MANDT
Company Role	Buyer (B) / Seller (S)	
ERP Transaction ID	Reference key of SAP Accounting document	BKPF-AWKEY
Document Number	Accounting document number	FI: BKPF-BELNR LIV: RBKP-BELNR SD: VBRK-VBELN
Document Type	Accounting document type	BKPF-BLART
Document Description	Accounting document header text	BKPF-BKTXT
Document partner number	Customer number (AR transactions) /	BSEG-KUNNR / BSEG-LIFNR
Vendor number (AP transactions)	BSEG-KUNNR /	KNA1-NAME1 / LFA1- NAME1
ERP Period	Fiscal Period	BKPF-MONAT

OUTPUT FIELD NAME	SAP FIELD NAME	TABLE FIELDNAME
Document Date	Document date in format : DD-MON-YYYY, E.g. 12-Aug-2012	BKPF-BLDAT
Fiscal Date	Posting Date Date Format : DD-MON-YYYY	BKPF-BUDAT
Gross Amount	Tax Base Amount in Local (Company code) Currency	BSET-HWBAS
Tax Amount	Tax Amount in Local (Company code) Currency	BSET-HWSTE
Document currency	Document currency key	BKPF-WAERS
Optional UDF 1	Custom field based on custom BAPI implementation	
Optional UDF 2	Custom field based on custom BAPI implementation	
Optional UDF 3	Custom field based on custom BAPI implementation	
Optional UDF 4	Custom field based on custom BAPI implementation	
Optional UDF 5	Custom field based on custom BAPI implementation	

### Extract Selection Screen Field Definition

The table below shows in detail each of the selection screens available at runtime of the Reconciliation Extract:

DESCRIPTION	FIELD NAME	TYPE	OPTIONAL / REQUIRED	DEFAULT VALUE
Company Code	BKPF-BUKRS	Parameter	R	
Fiscal Year	BKPF-GJAHR	Parameter	R	

DESCRIPTION	FIELD NAME	TYPE	OPTIONAL / REQUIRED	DEFAULT VALUE
Posting Date	BKPF-BUDAT	Select options	O	
Posting Period	BKPF-MONAT	Select options	O	
Tax Code	BSEG-MWSKZ	Select options	O	
Select Zero/Exempt tax records		Check Box	O	X
Application / Local server path		Radio Buttons	O	Application server
Application Server	RLGRAP-Filename	Parameter	O	TVARV variable value
Presentation Server	RLGRAP-Filename	Parameter	O	User parameter value
Company Code Prepend		Parameter	O	
Package Size		Parameter	R	10000

## ONESOURCE Indirect Tax Transport Objects

This section lists the technical objects delivered with the Reconciliation Extract Report transport provided:

OBJECT NAME	OBJECT TYPE	DESCRIPTION OF OBJECT
/IDT/	Name space	Container for all objects delivered by Thomson Reuters
/IDT/RECON_EXTRACT	Package	Package containing all report development objects
/IDT/RECEEXT	Transaction code	Transaction code to run the Reconciliation extract report

OBJECT NAME	OBJECT TYPE	DESCRIPTION OF OBJECT
/IDT/RECON_EXTRACT	Report program	Main program
/IDT/RECON_EXTRACT_TOP	Include	Include contains global types and data declaration
/IDT/RECON_EXTRACT_SEL	Include	Selection screen is defined under this include
/IDT/RECON_EXTRACT_FORM	Include	Include contains form routines
/IDT/BADIRECON_EXTRACT	BADI definition	BADI definition to add logic for 5 user defined fields
/IDT/EXTRACT_OUTPUT	Structure	Output file structure
/IDT/INT_RECON_EXTRACT	Interface	BADI Interface
/IDT/CL_RECON_EXTRACT	Class	Class implementing the BADI interface
/IDT/EXTRACT_UDF	Structure	BADI return data structure
/IDT/APP_SERVER_PATH	TVARV global variable	Variable in TVARV table to maintain Application server path
/IDT/LCLFILEPATH	Parameter ID	User parameter to maintain default Presentation server path

## Enabling Custom Fields

The file format of the Reconciliation Report allows for five (5) user defined fields (UDF) as pass through elements. Companies wishing to use these fields can use custom code to set a value from SAP and extract it into one of the UDF's. These values then will be imported into the Reporting reconciliation tables and show in the Reconciliation Report process.

A BADI **/IDT/BADIRECON\_EXTRACT** has been provided as part of the SAP Reconciliation Report which can be implemented by the customers. The BADI method returns the 5 UDF's in the structure **/IST/EXTRACT\_UDF**.