


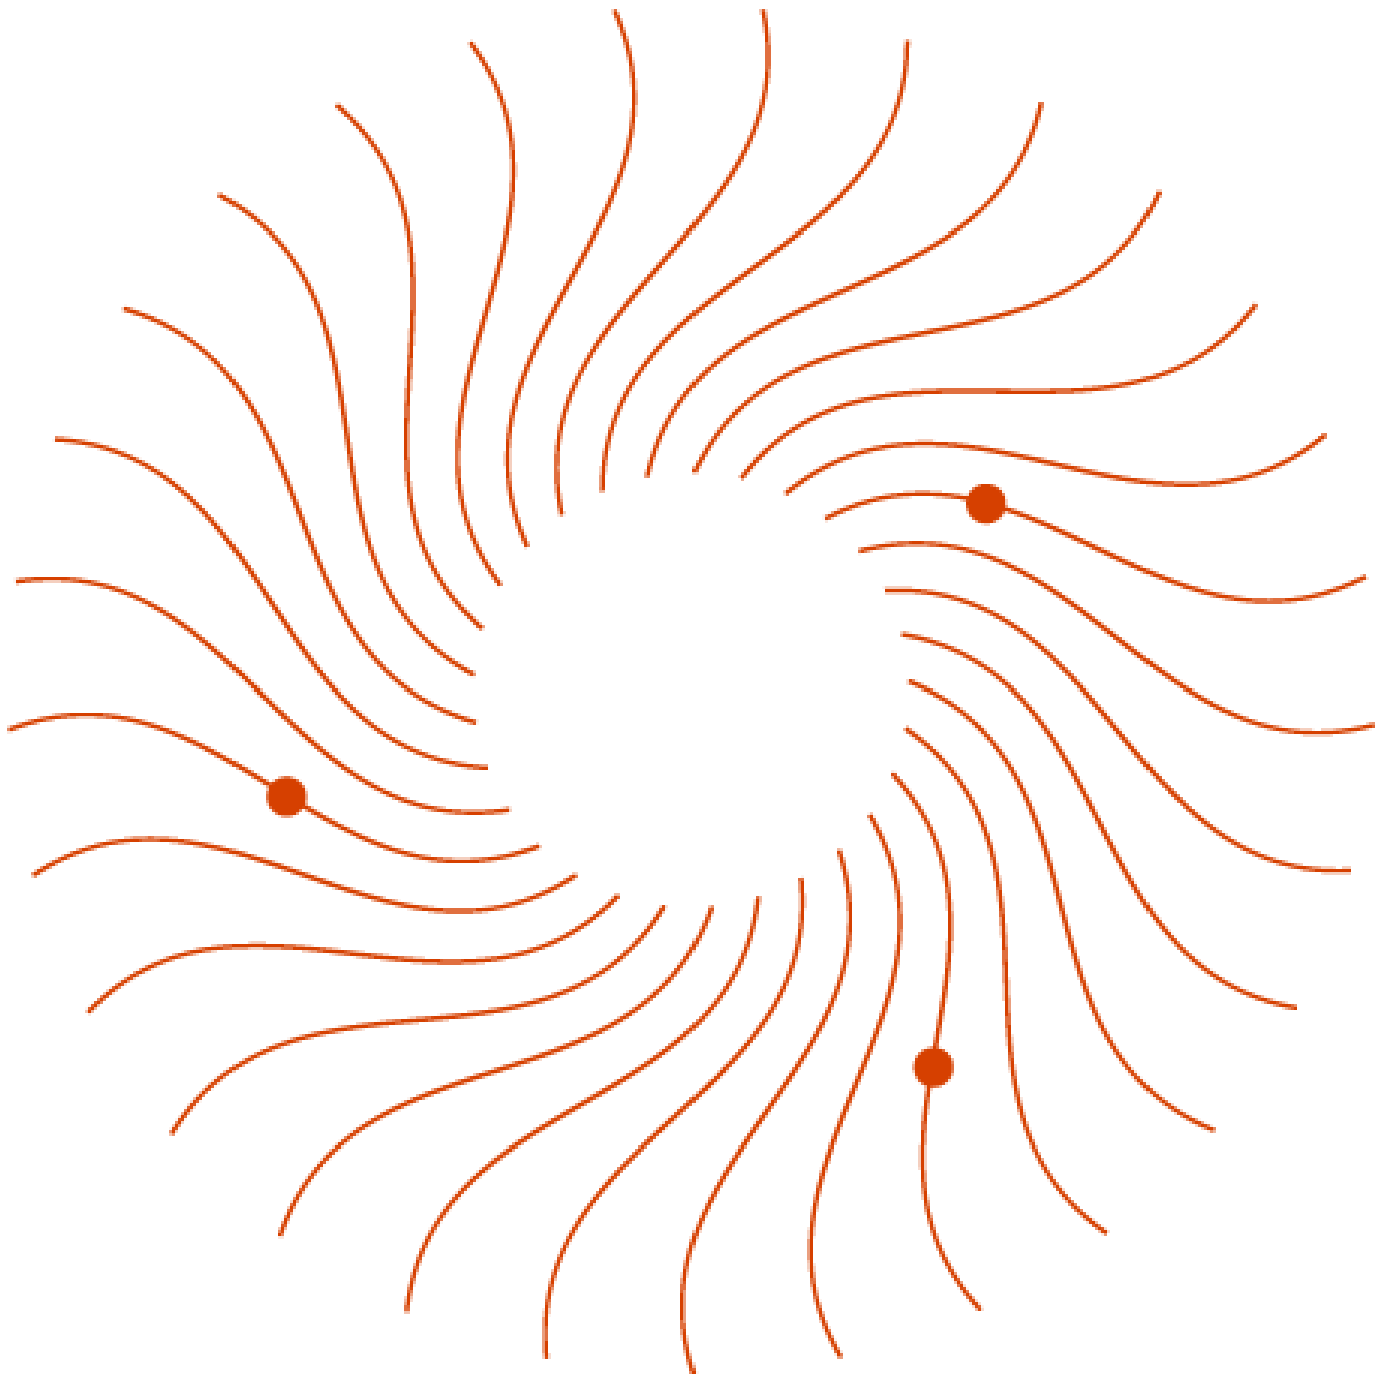

Registration Masks

ONESOURCE Indirect Tax

Last updated 2026.07.01

REGISTRATION MASKS IN DETERMINATION

Authority	Registration Mask	Explanation	Example(s)
Aegean Islands	<code>^EL\d{9}\$</code>	EL followed by nine digits.	EL123456789
Aegean Islands - Low Value Import Duty	<code>^EL\d{9}\$</code>	EL followed by nine digits.	EL123456789
Albania	<code>^[J-M]\d{8}[A-Z]\$</code>	J, K, L or M followed by eight digits followed by one capitalized letter (A through Z)	J12345678A; K12345678B; L12345678Z; M12345678M
Algeria	<code>^\d{15}\$</code>	Fifteen digits.	123456789012345
Andorra	<code>^\w\-\?\d{6}\-\?\w\$</code>	One alphanumeric character followed by an optional dash followed by six digits followed by an optional dash followed by one alphanumeric character.	A123456B: A-123456B; A123456-B; A-123456-B
Andorra IGI	<code>^\w\-\?\d{6}\-\?\w\$</code>	One alphanumeric character followed by an optional dash followed by six digits followed by an optional dash followed by one alphanumeric character.	A123456B: A-123456B; A123456-B; A-123456-B
Angola	<code>^\d{10}\$</code>	Ten digits.	1234567890
Angola Export	<code>^\d{10}\$</code>	Ten digits.	1234567890
Angola VAT	<code>^\d{10}\$ ^\d{9}[A-Z]{2}\d{3}\$</code>	Ten digits; OR nine digits followed by two capitalized letters followed by three digits.	1234567890; 123456789AZ123
Anguilla General Services Tax	<code>^\d{10}\$</code>	Ten digits.	1234567890
Anguilla Goods Tax	<code>^\d{10}\$</code>	Ten digits.	1234567890
Antigua and Barbuda	<code>^\d{7}\$</code>	Seven digits.	1234567

Authority	Registration Mask	Explanation	Example(s)
Argentina	<code>^\d{11}\$ ^\d{2}-\d{8}-\d{1}\$</code>	Eleven digits; OR two digits followed by a dash followed by eight digits followed by a dash followed by one digit.	12345678901; 12-12345678-1
Argentina Impuestos Internos	<code>^\d{11}\$ ^\d{2}-\d{8}-\d{1}\$</code>	Eleven digits; OR two digits followed by a dash followed by eight digits followed by a dash followed by one digit.	12345678901; 12-12345678-1
Argentina Buenos Aires GIT	<code>^\d{3}-\d{6}-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Capital Federal GIT	<code>^\d{3}-\d{6}-\d\$ ^\d{10}\$ ^\d{6,7}-\d{2}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits; OR 6 or 7 digits followed by a dash followed by two digits.	123-123456-1; 1234567891; 123456-12; 1234567-12
Argentina Catamarca GIT	<code>^\d{3}-\d{6}-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891

Authority	Registration Mask	Explanation	Example(s)
Argentina Chaco GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Chubut GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Cordoba GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Corrientes GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Entre Rios GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Formosa GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891

Authority	Registration Mask	Explanation	Example(s)
Argentina Jujuy GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina La Pampa GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina La Rioja GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Mendoza GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Misiones GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Neuquen GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891

Authority	Registration Mask	Explanation	Example(s)
Argentina Percepcion	<code>^\d{2}\-\d{7}\-\d{2}\$ ^\d{11}\$ ^\d{2}\-\d{8}\-\d{1}\$</code>	Two digits followed by a dash followed by seven digits followed by a dash followed by two digits; OR eleven digits; OR two digits followed by a dash followed by eight digits followed by a dash followed by one digit.	12-1234567-12; 12345678901; 12-12345678-1
Argentina Rio Negro GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Salta GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina San Juan GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891

Authority	Registration Mask	Explanation	Example(s)
Argentina San Luis GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Santa Cruz GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Santa Fe GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Santiago del Estero GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891
Argentina Surtax	<code>^\d{2}\-\d{7}\-\d{2}\$ ^\d{11}\$</code>	Two digits followed by a dash followed by seven digits followed by a dash followed by two digits; OR eleven digits.	12-1234567-12; 12345678912
Argentina Tierra del Fuego GIT	<code>^\d{3}\-\d{6}\-\d\$ ^\d{10}\$</code>	Three digits followed by a dash followed by six digits followed by a dash followed by a digit; OR ten digits.	123-123456-1; 1234567891

Authority	Registration Mask	Explanation	Example(s)
Austria	<code>^ATU\d{8}\$ ^ATU\d{8}\$^\d{2}s\d{3}\d{4}\$^EU ^IM</code>	ATU followed by eight digits; OR ATU followed by eight digits; OR two digits followed by a space followed by three digits followed by a slash followed by four digits; OR EU; OR IM.	ATU12345678; ATU12345678; 12 345/6789; EU; IM
Austria Domestic Reverse Charge	<code>^ATU\d{8}\$ ^ATU\d{8}\$^\d{2}s\d{3}\d{4}\$^EU</code>	ATU followed by eight digits; OR ATU followed by eight digits; OR two digits followed by a space followed by three digits followed by a slash followed by four digits; OR EU.	ATU12345678; ATU12345678; 12 345/6789; EU
Austria Low Value Import Duty	<code>^ATU\d{8}\$ ^ATU\d{8}\$^\d{2}s\d{3}\d{4}\$^EU ^IM</code>	ATU followed by eight digits; OR ATU followed by eight digits; OR two digits followed by a space followed by three digits followed by a slash followed by four digits; OR EU; OR IM.	ATU12345678; ATU12345678; 12 345/6789; EU; IM
Austria Private Copy Levy	<code>^ATU\d{8}\$ ^ATU\d{8}\$^\d{2}s\d{3}\d{4}\$^EU</code>	ATU followed by eight digits; OR ATU followed by eight digits; OR two digits followed by a space followed by three digits followed by a slash followed by four digits; OR EU.	ATU12345678; ATU12345678; 12 345/6789; EU

Authority	Registration Mask	Explanation	Example(s)
Azerbaijan	^\d{4}^\d{10}	Four digits; OR ten digits.	1234; 1234567890
Bahamas	^\d{9}\$	Nine digits.	123456789
Bahrain	^2\d{14}\$	2 followed by 14 digits.	212345678901234
Bangladesh	^\d{9}\-\d{4}\$	Nine digits followed by a dash followed by four digits.	123456789-1234
Barbados	^\d{8}\$ ^\d{13}\$	Eight digits or Thirteen digits.	12345678; 1234567890123
Belgium	^BE\d{10}\$ ^BE\s0\d{9}\$ ^BE\s1\d{9}\$ ^EU ^IM	BE followed by 10 digits; OR BE followed by a space followed by a 0 followed by 9 digits; OR BE followed by a space followed by a 1 followed by 9 digits; OR EU; OR IM.	BE1234567890; BE 0123456789; BE 1123456789; EU; IM
Belgium Domestic Reverse Charge	^BE\d{10}\$ ^BE\s0\d{9}\$ ^BE\s1\d{9}\$ ^EU	BE followed by 10 digits; OR BE followed by a space followed by a 0 followed by 9 digits; OR BE followed by a space followed by a 1 followed by 9 digits; OR EU.	BE1234567890; BE 0123456789; BE 1123456789; EU
Belgium Low Value Import Duty	^BE\d{10}\$ ^BE\s0\d{9}\$ ^BE\s1\d{9}\$ ^EU ^IM	BE followed by 10 digits; OR BE followed by a space followed by a 0 followed by 9 digits; OR BE followed by a space followed by a 1 followed by 9 digits; OR EU; OR IM.	BE1234567890; BE 0123456789; BE 1123456789; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Belgium Private Copy Levy	<code>^BE\d{10}\$ ^BE\s0\d{9}\$ ^BE\s1\d{9}\$ ^EU</code>	BE followed by 10 digits; OR BE followed by a space followed by a 0 followed by 9 digits; OR BE followed by a space followed by a 1 followed by 9 digits; OR EU.	BE1234567890; BE0123456789; BE1123456789; EU
Belgium Recycling Fees	<code>^BE\d{10}\$ ^BE\s0\d{9}\$ ^BE\s1\d{9}\$ ^EU</code>	BE followed by 10 digits; OR BE followed by a space followed by a 0 followed by 9 digits; OR BE followed by a space followed by a 1 followed by 9 digits; OR EU.	BE1234567890; BE0123456789; BE1123456789; EU
Belize	<code>^\d{1,6}\$</code>	One to six digits.	1; 12; 123; 1324; 12345; 123456
Belarus	<code>^\d{9}\$</code>	Nine digits.	123456789
Bolivia	<code>^\d{2}\s\d{3}\s\d{2}\$ ^\d{7,11}\$</code>	Two digits followed by a space followed by three digits followed by a space followed by two digits; OR seven to eleven digits.	12 123 12; 1234567; 12345678; 123456789; 1234567890; 12345678901

Authority	Registration Mask	Explanation	Example(s)
Botswana	<code>^[A-Z]\d{9}]^BW\d{11}]^CO\d{3}/\d{4}</code>	A capitalized letter A – Z followed by nine digits followed by any characters; OR BW followed by eleven digits followed by any characters; OR CO followed by three digits followed by a front slash followed by four digits followed by any characters.	P123456789; C123456789012; BW12345678901; CO123/1234
Bosnia and Herzegovina	<code>^\d{12}\$</code>	Twelve digits.	123456789012
Brazil CBS	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}/\w{4}\-\d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;

Authority	Registration Mask	Explanation	Example(s)
Brazil COFINS	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\- \d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;
Brazil COFINS Auto Withholding	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\- \d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;

Authority	Registration Mask	Explanation	Example(s)
Brazil COFINS-ST	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\-\d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;
Brazil COFINS Withholding	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\-\d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;

Authority	Registration Mask	Explanation	Example(s)
Brazil CSLL Withholding	$\w{12}\d{2}\$ \w{2}\.\w{3}\.\w{3}\w{4}\d{2}\$$	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;
Brazil IBS Acre	$01\.\d{3}\.\d{3}\w{3}\d{3}\d{2}\$ 01\d{11}\$ \d{17}\$ \d{13}\$$	01 followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by three digits followed by a dash followed by two digits; 01 followed by eleven digits; Seventeen digits; OR Thirteen digits.	01.123.123/123-12; 0112345678901; 12.456.789/123-45; 1234567890123

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Acre	<code>^01\.d{3}\.d{3}\d{3}\- \d{2}\$ ^01\d{11}\$ ^d{17}\$ ^d{13}\$</code>	01 followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by three digits followed by a dash followed by two digits; 01 followed by eleven digits; Seventeen digits; OR Thirteen digits.	01.123.123/123-12; 0112345678901; 12.456.789/123-45; 1234567890123
Brazil IBS Alagoas	<code>^24\d{7}\$ ^d{9}\$</code>	24 followed by seven digits; OR 9 digits.	241234567; 123456789
Brazil ICMS Alagoas	<code>^24\d{7}\$ ^d{9}\$</code>	24 followed by seven digits; OR 9 digits.	241234567; 123456789
Brazil IBS Amapa	<code>^03\d{7}\$ ^d{9}\$</code>	03 followed by seven digits; OR 9 digits.	031234567; 123456789
Brazil ICMS Amapa	<code>^03\d{7}\$ ^d{9}\$</code>	03 followed by seven digits; OR 9 digits.	031234567; 123456789
Brazil IBS Amazonas	<code>^d{2}\.d{3}\.d{3}\-d{1}\$ ^d{9}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a dash followed by one digit; OR nine digits.	12.123.123-1; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Amazonas	<code>^\d{2}\.\d{3}\.\d{3}\-\d{1}\$ ^\d{9}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a dash followed by one digit; OR nine digits.	12.123.123-1; 123456789
Brazil IBS Bahia	<code>^\d{6}\-\d{2}\$ ^\d{8}\$ ^\d{7}\-\d{2}\$ ^\d{9}\$</code>	Six digits followed by a dash followed by two digits; OR eight digits; OR seven digits followed by a dash followed by two digits; OR nine digits.	123456-12; 12345678; 1234567-12; 123456789
Brazil ICMS Bahia	<code>^\d{6}\-\d{2}\$ ^\d{8}\$ ^\d{7}\-\d{2}\$ ^\d{9}\$</code>	Six digits followed by a dash followed by two digits; OR eight digits; OR seven digits followed by a dash followed by two digits; OR nine digits.	123456-12; 12345678; 1234567-12; 123456789
Brazil IBS Ceara	<code>^\d{8}\-\d{1}\$ ^\d{9}\$</code>	Eight digits followed by a dash followed by one digit; OR nine digits.	12345678-9; 123456789
Brazil ICMS Ceara	<code>^\d{8}\-\d{1}\$ ^\d{9}\$</code>	Eight digits followed by a dash followed by one digit; OR nine digits.	12345678-9; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil IBS Distrito Federal	<code>^07\d{9}\-\d{2}\$ ^07\.\d{6}\.\d{3}\-\d{2}\$ ^07\d{11}\$ ^d{14}\$ ^d{16}\$ ^d{13}\$</code>	07 followed by nine digits followed by a dash followed by two digits; OR 07 followed by a period followed by six digits followed by a period followed by three digits followed by a dash followed by two digits; OR 07 followed by eleven digits; 08 followed by eleven digits; Fourteen digits; Sixteen digits; OR Thirteen digits.	07123456789-12; 07.123456.123-12; 0712345678901; 01123456789-12; 01.123456.123-12; 0112345678901
Brazil ICMS Distrito Federal	<code>^07\d{9}\-\d{2}\$ ^07\.\d{6}\.\d{3}\-\d{2}\$ ^07\d{11}\$ ^d{14}\$ ^d{16}\$ ^d{13}\$</code>	07 followed by nine digits followed by a dash followed by two digits; OR 07 followed by a period followed by six digits followed by a period followed by three digits followed by a dash followed by two digits; OR 07 followed by eleven digits; 08 followed by eleven digits; Fourteen digits; Sixteen digits; OR Thirteen digits.	07123456789-12; 07.123456.123-12; 0712345678901; 01123456789-12; 01.123456.123-12; 0112345678901

Authority	Registration Mask	Explanation	Example(s)
Brazil IBS Espírito Santo	<code>^\d{9}\$ ^\d{3}\.\d{3}\.\d{2}\-\d{1}\$</code>	Nine digits; OR three digits followed by a period followed by three digits followed by a period followed by two digits followed by a dash followed by one digit.	123456789; 123.123.12-1
Brazil ICMS Espírito Santo	<code>^\d{9}\$ ^\d{3}\.\d{3}\.\d{2}\-\d{1}\$</code>	Nine digits; OR three digits followed by a period followed by three digits followed by a period followed by two digits followed by a dash followed by one digit.	123456789; 123.123.12-1
Brazil IBS Goiás	<code>^10\d{7}\$ ^11\d{7}\$ ^15\d{7}\$ ^\d{2}\.\d{3}\.\d{3}\-\d{1}\$ ^\d{12}\$ ^\d{9}\$</code>	10 followed by seven digits; OR 11 followed by seven digits; OR 15 followed by seven digits; Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a dash followed by one digit; Twelve digits; OR Nine digits.	101234567; 111234567; 151234567; 12.123.123-1; 12.345.678-9; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Goias	$^{10}\{7\} \$ ^{11}\{7\} \$ ^{15}\{7\} \$ ^{\{2\}} \backslash \{3\} \backslash \{3\} \backslash \{1\} \$ ^{\{12\}} \$ ^{\{9\}} \$$	10 followed by seven digits; OR 11 followed by seven digits; OR 15 followed by seven digits; Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a dash followed by one digit; Twelve digits; OR Nine digits.	101234567; 111234567; 151234567; 12.123.123-1; 12.345.678-9; 123456789
Brazil IBS Maranhao	$^{12}\{7\} \$ ^{\{9\}} \$$	12 followed by seven digits; OR 9 digits.	121234567; 123456789
Brazil ICMS Maranhao	$^{12}\{7\} \$ ^{\{9\}} \$$	12 followed by seven digits; OR 9 digits.	121234567; 123456789
Brazil IBS Mato Grosso	$^{\{10\} \{8\}} \backslash \{1\} \$ ^{\{11\}} \$ ^{\{9\}} \$$	Ten digits followed by a dash followed by one digit; OR eight digits followed by a dash followed by one digit; OR eleven digits; OR nine digits.	1234567890-1; 12345678-9; 12345678901; 123456789
Brazil ICMS Mato Grosso	$^{\{10\} \{8\}} \backslash \{1\} \$ ^{\{11\}} \$ ^{\{9\}} \$$	Ten digits followed by a dash followed by one digit; OR eight digits followed by a dash followed by one digit; OR eleven digits; OR nine digits.	1234567890-1; 12345678-9; 12345678901; 123456789
Brazil IBS Mato Grosso do Sul	$^{28}\{7\} \$ ^{\{9\}} \$$	28 followed by seven digits; OR 9 digits.	281234567; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Mato Grosso do Sul	<code>^28\d{7}\$ ^d{9}\$</code>	28 followed by seven digits; OR 9 digits.	281234567; 123456789
Brazil IBS Minas Gerais	<code>^\d{1,3}\.\d{3}\.\d{3}\/\d{4}\$ ^d{11,13}\$</code>	One, two or three digits followed by a period followed by three digits followed by a period followed by a forward slash followed by four digits; OR eleven, twelve or thirteen digits followed.	12345678901; 1.123.123/1234; 123456789012; 12.123.123/1234; 1234567890123; 123.123.123/1234
Brazil ICMS Minas Gerais	<code>^\d{1,3}\.\d{3}\.\d{3}\/\d{4}\$ ^d{11,13}\$</code>	One, two or three digits followed by a period followed by three digits followed by a period followed by a forward slash followed by four digits; OR eleven, twelve or thirteen digits followed.	12345678901; 1.123.123/1234; 123456789012; 12.123.123/1234; 1234567890123; 123.123.123/1234
Brazil IBS Para	<code>^15\-\d{6}\-\d{1}\$ ^15\d{7}\$ ^d{11}\$ ^d{9}\$</code>	15 followed by a dash followed by six digits followed by a dash followed by one digit; OR 15 followed by seven digits; 2 digits followed by a dash followed by six digits followed by a dash followed by one digit; OR 9 digits.	15-123456-1; 151234567; 12-345678-9; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Para	<code>^15\-\d{6}\-\d{1}\$ ^15\d{7}\$ ^d{11}\$ ^d{9}\$</code>	15 followed by a dash followed by six digits followed by a dash followed by one digit; OR 15 followed by seven digits; 2 digits followed by a dash followed by six digits followed by a dash followed by one digit; OR 9 digits.	15-123456-1; 151234567; 12-345678-9; 123456789
Brazil IBS Paraiba	<code>^\d{8}\-\d{1}\$ ^d{9}\$</code>	Eight digits followed by a dash followed by one digit; OR nine digits.	12345678-1; 123456789
Brazil ICMS Paraiba	<code>^\d{8}\-\d{1}\$ ^d{9}\$</code>	Eight digits followed by a dash followed by one digit; OR nine digits.	12345678-1; 123456789
Brazil IBS Parana	<code>^\d{8}\-\d{2}\$ ^d{10}\$</code>	Eight digits followed by a dash followed by two digits; OR ten digits.	12345678-90; 1234567890
Brazil ICMS Parana	<code>^\d{8}\-\d{2}\$ ^d{10}\$</code>	Eight digits followed by a dash followed by two digits; OR ten digits.	12345678-90; 1234567890
Brazil IBS Pernambuco	<code>^\d{7}\-\d{2}\$ ^d{9}\$</code>	Seven digits followed by a mandatory dash followed by two digits OR nine digits.	1234567-89; 123456789
Brazil ICMS Pernambuco	<code>^\d{7}\-\d{2}\$ ^d{9}\$</code>	Seven digits followed by a mandatory dash followed by two digits OR nine digits.	1234567-89; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil IBS Piaui	^\d{9}\$	Nine digits.	123456789
Brazil ICMS Piaui	^\d{9}\$	Nine digits.	123456789
Brazil ICMS Repasse	^\d{14}\$ ^\d{2}\.\d{3}\.\d{3}\d{4}\-\d{2}\$	Fourteen digits; OR two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12345678901234; 12.123.123/1234-12
Brazil IBS Rio Grande do Norte	^20\.\d{3}\.\d{3}\-\d{1}\$ ^20\.\d{1}\.\d{3}\.\d{3}\$ ^20\d{7}\$ ^\d{12}\$ ^\d{9}\$	20 followed by a period followed by three digits followed by a dash followed by one digit; OR 20 followed by a period followed by one digit followed by a period followed by three digits followed by a period followed by three digits; 20 followed by seven digits; Twelve digits; OR Nine digits.	20.123.123-1; 20.1.123.123; 201234567; 12.345.678-9; 12.3.456.789; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Rio Grande do Norte	<code>^20\. \d{3}\. \d{3}\- \d{1}\$ ^20\. \d{1}\. \d{3}\. \d{3}\$ ^20\d{7}\$ ^ \d{12}\$ ^ \d{9}\$</code>	20 followed by a period followed by three digits followed by a dash followed by one digit; OR 20 followed by a period followed by one digit followed by a period followed by three digits followed by three digits; 20 followed by seven digits; Twelve digits; OR Nine digits.	20.123.123-1; 20.1.123.123; 201234567; 12.345.678-9; 12.3.456.789; 123456789
Brazil IBS Rio Grande do Sul	<code>^ \d{3} \d{7}\$ ^ \d{10}\$</code>	Three digits followed by a forward slash followed by seven digits; OR ten digits.	123/4567890; 1234567890
Brazil ICMS Rio Grande do Sul	<code>^ \d{3} \d{7}\$ ^ \d{10}\$</code>	Three digits followed by a forward slash followed by seven digits; OR ten digits.	123/4567890; 1234567890
Brazil IBS Rio de Janeiro	<code>^ \d{2} \d{3} \d{2} \- \d{1}\$ ^ \d{8}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by two digits followed by a dash followed by one digit; OR eight digits.	12.123.12-1; 12345678

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Rio de Janeiro	$\wedge \backslash d\{2\} \backslash . \backslash d\{3\} \backslash . \backslash d\{2\} \backslash - \backslash d\{1\} \$ \wedge \backslash d\{8\} \$$	Two digits followed by a period followed by three digits followed by a period followed by two digits followed by a dash followed by one digit; OR eight digits.	12.123.12-1; 12345678
Brazil IBS Rondonia	$\wedge \backslash d\{13\} \backslash - \backslash d\{1\} \$ \wedge \backslash d\{14\} \$$	Thirteen digits followed by a dash followed by one digit; OR fourteen digits.	1234567890123-4; 12345678901234
Brazil ICMS Rondonia	$\wedge \backslash d\{13\} \backslash - \backslash d\{1\} \$ \wedge \backslash d\{14\} \$$	Thirteen digits followed by a dash followed by one digit; OR fourteen digits.	1234567890123-4; 12345678901234
Brazil IBS Roraima	$\wedge 24 \backslash d\{6\} \backslash - \backslash d\{1\} \$ \wedge 24 \backslash d\{7\} \$ \wedge \backslash d\{10\} \$ \wedge \backslash d\{9\} \$$	24 followed by six digits followed by a dash followed by one digit; OR 24 followed by seven digits; 8 digits followed by a dash followed by one digit; OR 9 digits.	24123456-7; 241234567; 12345678-9; 123456789
Brazil ICMS Roraima	$\wedge 24 \backslash d\{6\} \backslash - \backslash d\{1\} \$ \wedge 24 \backslash d\{7\} \$ \wedge \backslash d\{10\} \$ \wedge \backslash d\{9\} \$$	24 followed by six digits followed by a dash followed by one digit; OR 24 followed by seven digits; 8 digits followed by a dash followed by one digit; OR 9 digits.	24123456-7; 241234567; 12345678-9; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil IBS Santa Catarina	<code>^\d{3}\.\d{3}\.\d{3}\$ ^\d{9}\$</code>	Three digits followed by a period followed by three digits followed by a period followed by three digits; OR nine digits.	123.123.123; 123456789
Brazil ICMS Santa Catarina	<code>^\d{3}\.\d{3}\.\d{3}\$ ^\d{9}\$</code>	Three digits followed by a period followed by three digits followed by a period followed by three digits; OR nine digits.	123.123.123; 123456789
Brazil IBS Sao Paulo	<code>^\d{3}\.\d{3}\.\d{3}\.\d{3}\$ ^\d{12}\$</code>	Three digits followed by a period followed by three digits followed by a period followed by three digits followed by a period followed by three digits; OR twelve digits.	123.123.123.123; 123456789012
Brazil ICMS Sao Paulo	<code>^\d{3}\.\d{3}\.\d{3}\.\d{3}\$ ^\d{12}\$</code>	Three digits followed by a period followed by three digits followed by a period followed by three digits followed by a period followed by three digits; OR twelve digits.	123.123.123.123; 123456789012
Brazil IBS Sergipe	<code>^\d{8}\-\d{1}\$ ^\d{9}\$</code>	Eight digits followed by a dash followed by one digit; OR nine digits.	12345678-9; 123456789

Authority	Registration Mask	Explanation	Example(s)
Brazil ICMS Sergipe	<code>^\d{8}\-\d{1}\$ ^\d{9}\$</code>	Eight digits followed by a dash followed by one digit; OR nine digits.	12345678-9; 123456789
Brazil IBS Tocantins	<code>^\d{11}\$ ^\d{9}\$</code>	Eleven digits OR nine digits.	12345678901; 123456789
Brazil ICMS Tocantins	<code>^\d{11}\$ ^\d{9}\$</code>	Eleven digits OR nine digits.	12345678901; 123456789
Brazil INSS Withholding	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\-\d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;

Authority	Registration Mask	Explanation	Example(s)
Brazil IPI	$\w{12}\d{2}\$ \w{2}\.\w{3}\.\w{3}\w{4}\w{2}\$$	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12;
Brazil IPI Pauta	$\w{12}\d{2}\$ \w{2}\.\w{3}\.\w{3}\w{4}\w{2}\$$	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil IRRF Withholding	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\- \d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12
Brazil IBS-CITY Cotia	<code>^\d{2}\.\d{3}\.\d{3}\w{4}\- \d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil ISS Cotia	<code>^\d{2}\.\d{3}\.\d{3}\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12
Brazil IBS-CITY Jaguariuna	<code>^\d{14}\$ ^\d{2}\.\d{3}\.\d{3}\d{4}\-\d{2}\$</code>	Fourteen digits; OR two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12345678901234; 12.123.123/1234-12
Brazil ISS Jaguariuna	<code>^\d{14}\$ ^\d{2}\.\d{3}\.\d{3}\d{4}\-\d{2}\$</code>	Fourteen digits; OR two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12345678901234; 12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil IBS-CITY Natal	$\wedge \backslash d\{2\} \backslash . \backslash d\{3\} \backslash . \backslash d\{3\} \backslash \backslash d\{4\} \backslash - \backslash d\{2\} \$$	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12
Brazil ISS Natal	$\wedge \backslash d\{2\} \backslash . \backslash d\{3\} \backslash . \backslash d\{3\} \backslash \backslash d\{4\} \backslash - \backslash d\{2\} \$$	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12
Brazil IBS-CITY Niteroi	$\wedge \backslash d\{2\} \backslash . \backslash d\{3\} \backslash . \backslash d\{3\} \backslash \backslash d\{4\} \backslash - \backslash d\{2\} \$$	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil ISS Niteroi	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12
Brazil IBS-CITY Poa	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12
Brazil ISS Poa	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil IBS-CITY Sao Caetano do Sul	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}^\d{5}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits; OR five digits.	12.123.123/1234-12; 12345
Brazil ISS Sao Caetano do Sul	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}^\d{5}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits; OR five digits.	12.123.123/1234-12; 12345
Brazil IBS-CITY Sao Jose dos Campos	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil ISS Sao Jose dos Campos	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12
Brazil IBS-CITY Uberlandia	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12
Brazil ISS Uberlandia	<code>^\d{2}\.\d{3}\.\d{3}\/\d{4}\-\d{2}\$</code>	Two digits followed by a period followed by three digits followed by a period followed by three digits followed by a front slash followed by four digits followed by a dash followed by two digits.	12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil PIS	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\- \d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12
Brazil PIS Auto Withholding	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\- \d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil PIS-ST	$\w{12}\d{2}\$ \w{2}\.\w{3}\.\w{3}\w{4}\w{2}\$$	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12
Brazil PIS Withholding	$\w{12}\d{2}\$ \w{2}\.\w{3}\.\w{3}\w{4}\w{2}\$$	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil PIS Pauta	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\- \d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12
Brazil PIS Withholding Goods	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\- \d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil COFINS Pauta	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\-\d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12
Brazil COFINS Withholding Goods	<code>^\w{12}\d{2}\$ ^\w{2}\.\w{3}\.\w{3}\w{4}\-\d{2}\$</code>	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
Brazil IRRF Withholding Goods	$\w{12}\d{2}\$ \w{2}\.\w{3}\.\w{3}\w{4}\w{2}\$$	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12
Brazil CSLL Withholding Goods	$\w{12}\d{2}\$ \w{2}\.\w{3}\.\w{3}\w{4}\w{2}\$$	12 alphanumeric characters followed by 2 numeric digits, or a sequence of 2 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a period, followed by 3 alphanumeric characters, followed by a slash, followed by 4 alphanumeric characters, followed by a dash, followed by 2 numeric digits.	AAR0WY7DA5QR74; A1.2B3.C4D/5E6F-78; 12345678901234; 12.123.123/1234-12

Authority	Registration Mask	Explanation	Example(s)
British Columbia	<code>^R\d{6}\$ ^(PST\-)?\d{4}\-\d{4}\$</code>	R followed by six digits; or PST followed by a dash (optional) followed by four digits followed by a dash followed by four digits.	R123456; PST-1234-5678 or 1234-5678
British Columbia Fees	<code>^R\d{6}\$ ^(PST\-)?\d{4}\-\d{4}\$</code>	R followed by six digits; or PST followed by a dash (optional) followed by four digits followed by a dash followed by four digits.	R123456; PST-1234-5678 or 1234-5678
British Columbia HST	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234
Bulgaria	<code>^\d{9,10}\$ ^BG\d{9,10}\$ ^EU ^IM</code>	Nine or ten digits; OR BG followed by nine or ten digits; OR EU; OR IM.	123456789; 1234567890; BG123456789; BG1234567890; EU; IM
Bulgaria Domestic Reverse Charge	<code>^\d{9,10}\$ ^BGindo\d{9,10}\$ ^EU</code>	Nine or ten digits; OR BG followed by nine or ten digits; OR EU.	123456789; 1234567890; BG123456789; BG1234567890; EU
Bulgaria Low Value Import Duty	<code>^\d{9,10}\$ ^BG\d{9,10}\$ ^EU ^IM</code>	Nine or ten digits; OR BG followed by nine or ten digits; OR EU; OR IM.	123456789; 1234567890; BG123456789; BG1234567890; EU; IM

Authority	Registration Mask	Explanation	Example(s)
CA - Credit	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234
Cambodia	<code>^\d{9}\$ ^[BEKL]\d{3}\-\d{9,10}\$</code>	Nine digits; OR one capitalized letter B, E, K or L followed by three digits followed by a dash followed by nine digits or ten digits.	123456789; B123- 123456789; E123- 1234567890; K123- 123456789; L123- 123456789
Cameroon	<code>^[A-Z]{1}\d{12}[A-Z]{1}\$</code>	One letter A-Z followed by twelve numbers, and one letter A-Z at the end.	A123456789000A
Canada	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234
Canary Islands	<code>^ES[A-Z0-9]\d{7}[A-Z0-9]\$ ^EU</code>	ES followed by one capital letter or one digit followed by seven digits and one capital letter or one digit; OR EU.	ESA1234567A; ES11234567A; ESA12345671; ES112345671; EU

Authority	Registration Mask	Explanation	Example(s)
Cape Verde	^(CV)?\d{9}\$	Optional CV followed by nine digits.	123456789; CV123456789
Chad	^\d{3}\s\d{2}\s\d{2}\s\w{1}\$ ^\d{7}\s\w{1}\$	Three digits followed by a space followed by two digits followed by a space followed by two digits followed by a space followed by one alpha-numeric character; OR seven digits followed by a space followed by any alpha-numeric character.	123 12 12 A; 123 12 12 a; 123 12 12 1; 1234567 A; 1234567 a; 1234567 1
Chile	^\d{2}[\.]? \d{3}[\.]? \d{3}\-[0-9 K]\$ ^\d{6,8}\-[0-9 K]\$	Two digits followed by an optional period followed by three digits followed by an optional period followed by three digits followed by a dash followed by one digit (0-9) or a K; OR Six to eight digits followed by a dash followed by one digit (0-9) or a K.	12.123.123-1; 12.123.123-K; 12123.123-1; 12123.123-K; 12.123123-1; 12.123123-K; 12123123-1; 12123123-K; 123456-1; 123456-K; 1234567-1; 1234567-K; 12345678-1; 12345678-K

Authority	Registration Mask	Explanation	Example(s)
China	<code>^\w{3}\s?\w{3}(\s?\w{3}\s?\w{3}\s?\w{3} \w{12} \w{14})\$</code>	Three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters; OR three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by twelve alpha-numeric characters; OR three digits followed by an optional space followed by three digits followed by fourteen alpha-numeric characters.	123 123 abc abc abc; 123123 abc abc abc; 123123abc abc abc; 123123abcabc abc; 123123abcabcabc; 123 123abcabcabc; 123 123 abcabcabc; 123 123 abc abcabc; 123 123abcdefghijkl; 123123abcdefghijkl; 123 123abcdefghijklmn; 123123abcdefghijklmn; abcdefghijklmnopqr;

Authority	Registration Mask	Explanation	Example(s)
China Business Tax	<code>^\w{3}\s?\w{3}(\s?\w{3}\s?\w{3}\s?\w{3} \w{12} \w{14})\$</code>	Three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters; OR three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters followed by twelve alpha-numeric characters; OR three digits followed by an optional space followed by three digits followed by fourteen alpha-numeric characters.	123 123 abc abc abc; 123123 abc abc abc; 123123abc abc abc; 123123abcabc abc; 123123abcabcabc; 123 123abcabcabc; 123 123 abcabcabc; 123 123 abc abcabc; 123 123abcdefghijkl; 123123abcdefghijkl; 123 123abcdefghijklmn; 123123abcdefghijklmn; abcdefghijklmnopqr;

Authority	Registration Mask	Explanation	Example(s)
Colombia	<code>^\d{3}\.\d{3}\.\d{3}\-\d{1}\$ ^\d{6,11}</code>	Three digits followed by a period followed by three digits followed by a period followed by three digits followed by a dash followed by one digit; OR six to eleven digits.	123.123.123-1; 123456; 1234567; 12345678; 123456789; 1234567890; 12345678901
Colombia Free Trade Zone (San Andres y Providencia)	<code>^\d{3}\.\d{3}\.\d{3}\-\d{1}\$</code>	Three digits followed by a period followed by three digits followed by a period followed by a dash followed by one digit.	123.123.123-1
Congo	<code>^(M P)\d{16}\$ ^(M P)\d{15}\$</code>	One capitalized letter M or P followed by sixteen digits; OR one capitalized letter M or P followed by fifteen digits.	M123456789112233; P12345678911223
Congo Additional Tax	<code>^(M P)\d{16}\$ ^(M P)\d{15}\$</code>	One capitalized letter M or P followed by sixteen digits; OR one capitalized letter M or P followed by fifteen digits.	M123456789112233; P12345678911223
Congo, The Democratic Republic of The	<code>^A\d{7}[A-Z]\$</code>	A capitalized “A” followed by seven digits followed by a capitalized letter A – Z.	A1234567A
Corsica	<code>^FR[A-Z0-9]{2}\d{9}\$</code>	FR followed by any two capitalized letters or numbers 0 - 9 followed by nine digits.	FRAA123456789; FRA1123456789; FR11123456789; FR1A123456789

Authority	Registration Mask	Explanation	Example(s)
Costa Rica	$\wedge \backslash d\{1\} \backslash - \backslash d\{3\} \backslash - \backslash d\{6\} \backslash - \backslash d\{2\} \$ \wedge \backslash d\{12\} \$ \wedge \backslash d\{1\} \backslash - \backslash d\{3\} \backslash - \backslash d\{6\} \$ \wedge \backslash d\{10\} \$ \wedge \backslash d\{9\} \$$	One digit followed by a dash followed by three digits followed by a dash followed by six digits followed by a dash followed by two digits; OR twelve digits OR one digit followed by a dash followed by three digits followed by a dash followed by six digits; OR ten digits; OR nine digits.	1-123-123456-12; 123456789012; 1-123-123456; 1234567890; 123456789
Cote D Ivoire	$\wedge \backslash d\{7\} [A-Z] \$$	Seven digits followed by capitalized letter A – Z.	1234567A
Croatia	$\wedge (HR)? \backslash d\{11\} \$ \wedge EU \wedge IM$	Optional HR followed by eleven digits; OR EU; OR IM.	12345678901; HR12345678912; EU; IM
Croatia Domestic Reverse Charge	$\wedge (HR)? \backslash d\{11\} \$ \wedge EU$	Optional HR followed by eleven digits; OR EU.	12345678901; HR12345678912; EU
Croatia Low Value Import Duty	$\wedge (HR)? \backslash d\{11\} \$ \wedge EU \wedge IM$	Optional HR followed by eleven digits; OR EU; OR IM.	12345678901; HR12345678912; EU; IM
Croatia Private Copy Levy	$\wedge (HR)? \backslash d\{11\} \$ \wedge EU$	Optional HR followed by eleven digits; OR EU.	12345678901; HR12345678912; EU
Curacao	$\wedge \backslash d\{3\} . \backslash d\{3\} . \backslash d\{3\} \$ \wedge \backslash d\{9\} \$$	Three digits followed by a period followed by three digits followed by a period followed by three digits OR nine digits.	123.123.123; 123456789

Authority	Registration Mask	Explanation	Example(s)
Cyprus	<code>^CY\d{8}[A-Z]\$ ^EU ^IM</code>	CY followed by eight digits followed by one capitalized letter A-Z; OR EU; OR IM.	CY12345678A; EU; IM
Cyprus Domestic Reverse Charge	<code>^CY\d{8}[A-Z]\$ ^EU</code>	CY followed by eight digits followed by one capitalized letter A-Z; OR EU.	CY12345678A; EU
Cyprus Low Value Import Duty	<code>^CY\d{8}[A-Z]\$ ^EU ^IM</code>	CY followed by eight digits followed by one capitalized letter A-Z; OR EU; OR IM.	CY12345678A; EU; IM
Czech Republic	<code>^CZ\d{8}\$ ^CZ\d{9}\$ ^CZ\d{10}\$ ^EU ^IM</code>	CZ followed by eight digits; OR CZ followed by nine digits; OR CZ followed by ten digits; OR EU; OR IM.	CZ12345678; CZ123456789; CZ1234567890; EU; IM
Czech Republic Domestic Reverse Charge	<code>^CZ\d{8}\$ ^CZ\d{9}\$ ^CZ\d{10}\$ ^EU</code>	CZ followed by eight digits; OR CZ followed by nine digits; OR CZ followed by ten digits; OR EU.	CZ12345678; CZ123456789; CZ1234567890; EU
Czech Republic Low Value Import Duty	<code>^CZ\d{8}\$ ^CZ\d{9}\$ ^CZ\d{10}\$ ^EU ^IM</code>	CZ followed by eight digits; OR CZ followed by nine digits; OR CZ followed by ten digits; OR EU; OR IM.	CZ12345678; CZ123456789; CZ1234567890; EU; IM
Czech Republic Recycling Fees	<code>^CZ\d{8}\$ ^CZ\d{9}\$ ^CZ\d{10}\$ ^EU</code>	CZ followed by eight digits; OR CZ followed by nine digits; OR CZ followed by ten digits; OR EU.	CZ12345678; CZ123456789; CZ1234567890; EU
Denmark	<code>^(DK)?\d{8}\$ ^EU ^IM</code>	An optional DK followed by eight digits; OR EU; OR IM.	DK12345678; 12345678; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Denmark Domestic Reverse Charge	^(DK)?\d{8}\$ ^EU	An optional DK followed by eight digits; OR EU.	DK12345678; 12345678; EU
Denmark Low Value Import Duty	^(DK)?\d{8}\$ ^EU ^IM	An optional DK followed by eight digits; OR EU; OR IM.	DK12345678; 12345678; EU; IM
Denmark Private Copy Levy	^(DK)?\d{8}\$ ^EU	An optional DK followed by eight digits; OR EU.	DK12345678; 12345678; EU
Dominica	^0?\d{7}\$	An optional 0 followed by seven digits.	01234567; 1234567
Dominican Republic	^(\d{9} \d{11})\$	Nine digits; OR eleven digits.	123456789; 12345678901
Ecuador	^\d{13}\$	Thirteen digits.	1234567890123
Egypt	^(EG)?\d{3}-?\d{3}-?\d{2,3}\$ ^(\d{1}-\d{5})-(\d{3})-(\d{2})-(\d{2})\$	Optional EG followed by three digits followed by an optional dash followed by three digits followed by an optional dash followed by two or three digits; OR one digit followed by a dash followed by five digits followed by a dash followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits.	12312312; 123123123; EG12312312; EG123123123; 123123123; EG123-123-12; EG123-123-12; EG123-123-123; EG123456-12; 123456-12; EG123456-123; 123456-123; EG123-12345; 123-12345; EG123-123456; 1-12345-123-12-12
El Salvador	^(\d{2,8} \d{14})\$	Two to eight digits, OR fourteen digits.	12; 123; 1234; 12345; 123456; 1234567; 12345678; 12345678901234

Authority	Registration Mask	Explanation	Example(s)
Equatorial Guinea	$\wedge \backslash d\{5\} \backslash - ? [A-Z] ? \backslash - \backslash d\{2\} \$ \wedge \backslash d\{5\} [A-Z] \{2\} \backslash - \backslash d\{2\} \$$	Five digits followed by a dash followed by an optional letter followed by a dash followed by two digits; OR five digits followed by two capital letters A-Z followed by a dash followed by two digits.	12345-A-23; 12345AB-12
Estonia	$\wedge EE \backslash d\{9\} \$ \wedge EU \wedge IM$	EE followed by nine digits; OR EU; OR IM.	EE123456789; EU; IM
Estonia Domestic Reverse Charge	$\wedge EE \backslash d\{9\} \$ \wedge EU$	EE followed by nine digits; OR EU.	EE123456789; EU
Estonia Low Value Import Duty	$\wedge EE \backslash d\{9\} \$ \wedge EU \wedge IM$	EE followed by nine digits; OR EU; OR IM.	EE123456789; EU; IM
Fiji	$\wedge \backslash d\{2\} - \backslash d\{5\} - \backslash d\{1\} - \backslash d\{1\} \$ \wedge \backslash d\{9\} \$$	Two digits followed by a dash followed by five digits followed by a dash followed by one digit followed by a dash followed by one digit; OR nine digits.	12-12345-1-1; 123456789
Finland	$\wedge (FI) ? \backslash d\{8\} \$ \wedge EU \wedge IM$	An optional FI followed by eight digits; OR EU; OR IM.	FI12345678; 12345678; EU; IM
Finland Domestic Reverse Charge	$\wedge (FI) ? \backslash d\{8\} \$ \wedge EU$	An optional FI followed by eight digits; OR EU.	FI12345678; 12345678; EU
Finland Low Value Import Duty	$\wedge (FI) ? \backslash d\{8\} \$ \wedge EU \wedge IM$	An optional FI followed by eight digits; OR EU; OR IM.	FI12345678; 12345678; EU; IM
Finland Private Copy Levy	$\wedge (FI) ? \backslash d\{8\} \$ \wedge EU$	An optional FI followed by eight digits; OR EU.	FI12345678; 12345678; EU

Authority	Registration Mask	Explanation	Example(s)
France	<code>^FR[A-Z0-9]{2}\d{9}\$ ^d{9}\$ ^d{14}\$^EU ^IM</code>	FR followed by any two capitalized letters or numbers 0 - 9 followed by nine digits; OR nine digits OR fourteen digits; OR EU; OR IM.	FRAA123456789; FRA1123456789; FR11123456789; FR1A123456789; 123456789; 12345678901234; EU; IM
France Domestic Reverse Charge	<code>^FR[A-Z0-9]{2}\d{9}\$ ^d{9}\$ ^d{14}\$^EU</code>	FR followed by any two capitalized letters or numbers 0 - 9 followed by nine digits; OR nine digits OR fourteen digits; OR EU.	FRAA123456789; FRA1123456789; FR11123456789; FR1A123456789; 123456789; 12345678901234; EU
France Low Value Import Duty	<code>^FR[A-Z0-9]{2}\d{9}\$ ^d{9}\$ ^d{14}\$^EU ^IM</code>	FR followed by any two capitalized letters or numbers 0 - 9 followed by nine digits; OR nine digits OR fourteen digits; OR EU; OR IM.	FRAA123456789; FRA1123456789; FR11123456789; FR1A123456789; 123456789; 12345678901234; EU; IM
France Private Copy Levy	<code>^FR[A-Z0-9]{2}\d{9}\$ ^d{9}\$ ^d{14}\$^EU</code>	FR followed by any two capitalized letters or numbers 0 - 9 followed by nine digits; OR nine digits OR fourteen digits; OR EU.	FRAA123456789; FRA1123456789; FR11123456789; FR1A123456789; 123456789; 12345678901234; EU
France Recycling Fees	<code>^FR[A-Z0-9]{2}\d{9}\$ ^d{9}\$ ^d{14}\$^EU</code>	FR followed by any two capitalized letters or numbers 0 - 9 followed by nine digits; OR nine digits OR fourteen digits; OR EU.	FRAA123456789; FRA1123456789; FR11123456789; FR1A123456789; 123456789; 12345678901234; EU

Authority	Registration Mask	Explanation	Example(s)
French Polynesia	<code>^[A-Z0-9]\d{5}((- \d{3})?)\$</code>	One letter A - Z or number 0 - 9 followed by five digits followed by an option dash and three digits.	A12345; A12345-001; 112345; 112345-001
Gabon	<code>^\d{6}\w\$</code>	Six digits followed by one alpha-numeric character	123456A
Georgia	<code>^\d{9}\$</code>	Nine digits.	123456789
Germany	<code>^\d{2}/\d{3}/\d{5}\$ ^\d{3}/\d{3}/\d{5}\$ ^DE\d{9}\$ ^\d{10}\$ ^\d{11}\$ ^\d{13}\$ ^EU ^IM</code>	Two digits followed by slash, three digits, slash, five digits; three digits followed by slash, three digits, slash, five digits; OR letters DE followed by 9 digits; OR ten digits; OR eleven digits; OR thirteen digits; OR letters EU; OR letters IM).	12/123/12345; 123/123/12345; DE123456789; 1234567890; 12345678901; 1234567890123; EU; IM
Germany Domestic Reverse Charge	<code>^\d{2}/\d{3}/\d{5}\$ ^\d{3}/\d{3}/\d{5}\$ ^DE\d{9}\$ ^\d{10}\$ ^\d{11}\$ ^\d{13}\$ ^EU ^IM</code>	Two digits followed by slash, three digits, slash, five digits; three digits followed by slash, three digits, slash, five digits; OR letters DE followed by 9 digits; OR ten digits; OR eleven digits; OR thirteen digits; OR letters EU; OR letters IM.	12/123/12345; 123/123/12345; DE123456789; 1234567890; 12345678901; 1234567890123; EU; IM
Germany Low Value Import Duty	<code>^\d{2}/\d{3}/\d{5}\$ ^\d{3}/\d{3}/\d{5}\$ ^DE\d{9}\$ ^\d{10}\$ ^\d{11}\$ ^\d{13}\$ ^EU ^IM</code>	Two digits followed by slash, three digits, slash, five digits; three digits followed by slash, three digits, slash, five digits; OR letters DE followed by 9 digits; OR ten digits; OR eleven digits; OR thirteen digits; OR letters EU; OR letters IM).	12/123/12345; 123/123/12345; DE123456789; 1234567890; 12345678901; 1234567890123; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Germany Private Copy Levy	<code>^\d{2}/\d{3}/\d{5}\$ ^\d{3}/\d{3}/\d{5}\$ ^DE\d{9}\$ ^\d{10}\$ ^\d{11}\$ ^\d{13}\$ ^EU ^IM</code>	Two digits followed by slash, three digits, slash, five digits; three digits followed by slash, three digits, slash, five digits; OR letters DE followed by 9 digits; OR ten digits; OR eleven digits; OR thirteen digits; OR letters EU; OR letters IM.	12/123/12345; 123/123/12345; DE123456789; 1234567890; 12345678901; 1234567890123; EU; IM
Gambia	<code>^\d{9}\$</code>	Nine digits.	123456789
Ghana	<code>^\d{3}\s[A-Z]{1}\s\d{6}\$ ^\d{3}[A-Z]{1}\d{6} ^[A-Z]\d{10}\$ ^[A-Z]\w{10}\$</code>	Three digits followed by a space followed by one capitalized letter A - Z followed by a space followed by six digits; OR three digits followed by one capitalized letter A - Z followed by six digits; or one capital letter A-Z followed by ten alpha numeric characters.	123 A 123456; 123A123456; A1234567890; P123456789X

Authority	Registration Mask	Explanation	Example(s)
Ghana National Health Insurance Levy	<code>^\d{3}\s[A-Z]{1}\s\d{6}\$ ^\d{3}[A-Z]{1}\d{6} ^[A-Z]\d{10}\$ ^[A-Z]\w{10}\$</code>	Three digits followed by a space followed by one capitalized letter A - Z followed by a space followed by six digits; OR three digits followed by one capitalized letter A - Z followed by six digits, or one capital letter A-Z followed by ten alpha numeric characters.	123 A 123456; 123A123456; P123456789X
Greece	<code>^EL\d{9}\$ ^EU ^IM</code>	EL followed by nine digits; OR EU; OR IM.	EL123456789; EU; IM
Greece Domestic Reverse Charge	<code>^EL\d{9}\$ ^EU</code>	EL followed by nine digits; OR EU.	EL123456789; EU
Greece Low Value Import Duty	<code>^EL\d{9}\$ ^EU ^IM</code>	EL followed by nine digits; OR EU; OR IM.	EL123456789; EU; IM
Greece Private Copy Levy	<code>^EL\d{9}\$ ^EU</code>	EL followed by nine digits; OR EU.	EL123456789; EU
Greek Islands 2015	<code>^EL\d{9}\$ ^EU</code>	EL followed by nine digits; OR EU.	EL123456789; EU
Greek Islands 2016	<code>^EL\d{9}\$ ^EU</code>	EL followed by nine digits; OR EU.	EL123456789; EU
Greek Islands 2017	<code>^EL\d{9}\$ ^EU</code>	EL followed by nine digits; OR EU.	EL123456789; EU
Greek Islands January 2018	<code>^EL\d{9}\$ ^EU</code>	EL followed by nine digits; OR EU.	EL123456789; EU
Grenada	<code>^\d{6,7}\$</code>	Six or seven digits.	123456; 1234567
Guatemala	<code>^\d{1,7}(-)?[0-9K]\$ ^\d{9}\$</code>	2 to 9 digits, the last character of which may be separated with an optional dash, may be a number or the capital letter "K".	1-1; 11; 12-1; 121; 123-1; 1231; 1234-1; 12341; 12345-1; 123451; 123456-1; 1234561; 123456789; 1234567-1; 12345671; 1234567K; 1234567-K

Authority	Registration Mask	Explanation	Example(s)
Guinea	<code>^\d{9}-\d{1}[A-Z]\$</code>	Nine digits followed by a dash followed by one digit followed by one capitalized letter A - Z.	123456789-1A
Guyana	<code>^(0 1)\d{8}\$</code>	0 or 1 followed by eight digits.	012345678; 112345678
Honduras	<code>^\d{14}\$</code>	Fourteen digits.	12345678912345
Hungary	<code>^HU\d{8}\$ ^\d{8}-\d-\d{2}\$ ^EU ^IM</code>	HU followed by eight digits OR eight digits followed by a dash followed by one digit followed by a dash followed by two digits; OR EU; OR IM.	HU12345678; 12345678-1-12; EU; IM
Hungary Domestic Reverse Charge	<code>^HU\d{8}\$ ^\d{8}-\d-\d{2}\$ ^EU</code>	HU followed by eight digits OR eight digits followed by a dash followed by one digit followed by a dash followed by two digits; OR EU.	HU12345678; 12345678-1-12; EU
Hungary Low Value Import Duty	<code>^HU\d{8}\$ ^\d{8}-\d-\d{2}\$ ^EU ^IM</code>	HU followed by eight digits OR eight digits followed by a dash followed by one digit followed by a dash followed by two digits; OR EU; OR IM.	HU12345678; 12345678-1-12; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Hungary Private Copy Levy	<code>^HU\d{8}\$ ^d{8}-\d-\d{2}\$ ^EU</code>	HU followed by eight digits OR eight digits followed by a dash followed by one digit followed by a dash followed by two digits; OR EU.	HU12345678; 12345678-1-12; EU
Iceland	<code>^\d{5,6}\$ ^d{10}\$ ^VSK\d{5,6}\$</code>	Five or six digits; OR ten digits; OR VSK followed by five or six digits.	12345; 123456; 1234567890; VSK12345; VSK123456
India Andaman and Nicobar Islands Central GST	<code>^35\w{13}\$ ^99\w{13}\$ ^97\w{13}\$</code>		
India Andaman and Nicobar Islands Compensation Cess		35, followed by thirteen alphanumeric characters.	35AAAAA0000A1Z0; 3500005555ZZZ12
India Andaman and Nicobar Islands Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 9900005555ZZZ12
India Andaman and Nicobar Islands Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Andaman and Nicobar Islands Union Territory GST			

Authority	Registration Mask	Explanation	Example(s)
India Andhra Pradesh Central GST	^37\w{13}\$ ^99\w{13}\$ ^97\w{13}\$		
India Andhra Pradesh Compensation Cess		37, followed by thirteen alphanumeric characters.	37AAAAA0000A1Z0; 3700005555ZZZ12
India Andhra Pradesh Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 9900005555ZZZ12
India Andhra Pradesh Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Andhra Pradesh State GST			
India Arunachal Pradesh Central GST	^12\w{13}\$ ^99\w{13}\$ ^97\w{13}\$		
India Arunachal Pradesh Compensation Cess		12, followed by thirteen alphanumeric characters.	12AAAAA0000A1Z0; 1200005555ZZZ12
India Arunachal Pradesh Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 9900005555ZZZ12
India Arunachal Pradesh Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Arunachal Pradesh State GST			

Authority	Registration Mask	Explanation	Example(s)
India Assam Central GST	^18\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	18, followed by thirteen alphanumeric characters.	18AAAAA0000A1Z0; 1800005555ZZZ12
India Assam Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 9900005555ZZZ12
India Assam Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Assam Integrated GST			
India Assam State GST			
India Bihar Central GST	^10\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	10, followed by thirteen alphanumeric characters.	10AAAAA0000A1Z0; 10A0005555ZZZ12
India Bihar Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Bihar Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Bihar Integrated GST			
India Bihar State GST			

Authority	Registration Mask	Explanation	Example(s)
India CENVAT	<code>^\w{5}\d{4}\w{1}s?\w{2}s?\d{3}\$</code>	Five alpha-numeric characters followed by four digits followed by one alpha-numeric character followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	abcde1234a ab 123; abcde1234aab 123; abcde1234a ab123; abcde1234aab123
India Chandigarh Central GST	<code>^04\w{13}\$ ^99\w{13}\$ ^97\w{13}\$</code>		
India Chandigarh Compensation Cess		04, followed by thirteen alphanumeric characters.	04AAAAA0000A1Z0; 04A0005555ZZZ12
India Chandigarh Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Chandigarh Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Chandigarh Union Territory GST			

Authority	Registration Mask	Explanation	Example(s)
India Chhattisgarh Central GST			
India Chhattisgarh Compensation Cess		22, followed by thirteen alphanumeric characters.	22AAAAA0000A1Z0; 22A0005555ZZZ12
India Chhattisgarh Compensation Cess (Intrastate)	^22\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Chhattisgarh Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Chhattisgarh State GST			

Authority	Registration Mask	Explanation	Example(s)
India Dadra and Nagar Haveli and Daman and Diu Central GST	^26\w{13}\$ ^99\w{13}\$ ^97\w{13}\$		
India Dadra and Nagar Haveli and Daman and Diu Compensation Cess		26, followed by thirteen alphanumeric characters.	26AAAAA0000A1Z0; 26A0005555ZZZ12
India Dadra and Nagar Haveli and Daman and Diu Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Dadra and Nagar Haveli and Daman and Diu Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Dadra and Nagar Haveli and Daman and Diu Union Territory GST			
India Delhi Central GST	^07\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	07, followed by thirteen alphanumeric characters.	07AAAAA0000A1Z0; 07A0005555ZZZ12
India Delhi Compensation Cess			
India Delhi Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Delhi Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Delhi State GST			

Authority	Registration Mask	Explanation	Example(s)
India Education Cess	<code>^\w{5}\d{4}\w{1}\s?\w{2}\s?\d{3}\$</code>	Five alpha-numeric characters followed by four digits followed by one alpha-numeric character followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	abcde1234a ab 123; abcde1234aab 123; abcde1234a ab123; abcde1234aab123
India Education Cess Reverse Charge	<code>^\w{5}\d{4}\w{1}\s?\w{2}\s?\d{3}\$</code>	Five alpha-numeric characters followed by four digits followed by one alpha-numeric character followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	abcde1234a ab 123; abcde1234aab 123; abcde1234a ab123; abcde1234aab123

Authority	Registration Mask	Explanation	Example(s)
India Goa Central GST	^30\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	30, followed by thirteen alphanumeric characters.	30AAAAA0000A1Z0; 30A0005555ZZZ12
India Goa Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Goa Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Goa Integrated GST			
India Goa State GST			
India Gujarat Central GST	^24\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	24, followed by thirteen alphanumeric characters.	24AAAAA0000A1Z0; 24A0005555ZZZ12
India Gujarat Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Gujarat Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Gujarat Integrated GST			
India Gujarat State GST			

Authority	Registration Mask	Explanation	Example(s)
India Haryana Central GST	^06\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	06, followed by thirteen alphanumeric characters.	06AAAAA0000A1Z0; 06A0005555ZZZ12
India Haryana Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Haryana Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Haryana Integrated GST			
India Haryana State GST			
India Higher Education Cess	^\w{5}\d{4}\w{1}\s?\w{2}\s?\d{3}\$	Five alpha-numeric characters followed by four digits followed by one alpha-numeric character followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	abcde1234a ab 123; abcde1234aab 123; abcde1234a ab123; abcde1234aab123

Authority	Registration Mask	Explanation	Example(s)
India Higher Education Cess Reverse Charge	<code>^\w{5}\d{4}\w{1}s?\w{2}s?\d{3}\$</code>	Five alpha-numeric characters followed by four digits followed by one alpha-numeric character followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	abcde1234a ab 123; abcde1234aab 123; abcde1234a ab123; abcde1234aab123
India Himachal Pradesh Central GST	<code>^02\w{13}\$ ^99\w{13}\$ ^97\w{13}\$</code>	02, followed by thirteen alphanumeric characters.	02AAAAA0000A1Z0; 02A0005555ZZZ12
India Himachal Pradesh Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Himachal Pradesh Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Himachal Pradesh Integrated GST			
India Himachal Pradesh State GST			

Authority	Registration Mask	Explanation	Example(s)
India Jammu and Kashmir Central GST	^01\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	01, followed by thirteen alphanumeric characters.	01AAAAA0000A1Z0; 01A0005555ZZZ12
India Jammu and Kashmir Compensation Cess			
India Jammu and Kashmir Compensation Cess (Intrastate)			
India Jammu and Kashmir Integrated GST			
India Jammu and Kashmir State GST			
India Jharkhand Central GST	^20\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	20, followed by thirteen alphanumeric characters.	20AAAAA0000A1Z0; 20A0005555ZZZ12
India Jharkhand Compensation Cess			
India Jharkhand Compensation Cess (Intrastate)			
India Jharkhand Integrated GST			
India Jharkhand State GST			

Authority	Registration Mask	Explanation	Example(s)
India Karnataka Central GST	^29\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	29, followed by thirteen alphanumeric characters.	29AAAAA0000A1Z0; 29A0005555ZZZ12
India Karnataka Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Karnataka Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Karnataka Integrated GST			
India Karnataka State GST			
India Kerala Central GST	^32\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	32, followed by thirteen alphanumeric characters.	32AAAAA0000A1Z0; 32A0005555ZZZ12
India Kerala Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Kerala Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Kerala Flood Cess			
India Kerala Integrated GST			
India Kerala State GST			
India Krishi Kalyan Cess	^[A-Z0-9]{10}\s?\w{2}\s?\d{3}\$	Ten letters A - Z or numbers 0 - 9 followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	ABCDE1234A ab 123; ABCDE1234Aab 123; ABCDE1234A ab123; ABCDE1234Aab123

Authority	Registration Mask	Explanation	Example(s)
India Krishi Kalyan Cess Reverse Charge	<code>^[A-Z0-9]{10}\s?\w{2}\s?\d{3}\$</code>	Ten letters A - Z or numbers 0 - 9 followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	abcde1234a ab 123; abcde1234aab 123; abcde1234a ab123; abcde1234aab123
India Lakshadweep Central GST	<code>^31\w{13}\$ ^99\w{13}\$ ^97\w{13}\$</code>		
India Lakshadweep Compensation Cess		31, followed by thirteen alphanumeric characters.	31AAAAA0000A1Z0; 31A0005555ZZZ12
India Lakshadweep Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Lakshadweep Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Lakshadweep Union Territory GST			

Authority	Registration Mask	Explanation	Example(s)
India Madhya Pradesh Central GST	^23\w{13}\$ ^99\w{13}\$ ^97\w{13}\$		
India Madhya Pradesh Compensation Cess		23, followed by thirteen alphanumeric characters.	23AAAAA0000A1Z0; 23A0005555ZZZ12
India Madhya Pradesh Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Madhya Pradesh Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Madhya Pradesh State GST			
India Maharashtra Central GST	^27\w{13}\$ ^99\w{13}\$ ^97\w{13}\$		
India Maharashtra Compensation Cess		27, followed by thirteen alphanumeric characters.	27AAAAA0000A1Z0; 27A0005555ZZZ12
India Maharashtra Compensation Cess (Intrastate)		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Maharashtra Integrated GST		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Maharashtra State GST			

Authority	Registration Mask	Explanation	Example(s)
India Manipur Central GST	^14\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	14, followed by thirteen alphanumeric characters.	14AAAAA0000A1Z0; 14A0005555ZZZ12
India Manipur Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Manipur Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Manipur Integrated GST			
India Manipur State GST			
India Meghalaya Central GST	^17\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	17, followed by thirteen alphanumeric characters.	17AAAAA0000A1Z0; 17A0005555ZZZ12
India Meghalaya Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Meghalaya Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Meghalaya Integrated GST			
India Meghalaya State GST			

Authority	Registration Mask	Explanation	Example(s)
India Mizoram Central GST	^15\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	15, followed by thirteen alphanumeric characters.	15AAAAA0000A1Z0; 15A0005555ZZZ12
India Mizoram Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Mizoram Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Mizoram Integrated GST			
India Mizoram State GST			
India Nagaland Central GST	^13\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	13, followed by thirteen alphanumeric characters.	13AAAAA0000A1Z0; 13A0005555ZZZ12
India Nagaland Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Nagaland Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Nagaland Integrated GST			
India Nagaland State GST			

Authority	Registration Mask	Explanation	Example(s)
India Orissa Central GST	^21\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	21, followed by thirteen alphanumeric characters.	21AAAAA0000A1Z0; 21A0005555ZZZ12
India Orissa Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Orissa Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Orissa Integrated GST			
India Orissa State GST			
India Puducherry Central GST	^34\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	34, followed by thirteen alphanumeric characters.	34AAAAA0000A1Z0; 34A0005555ZZZ12
India Puducherry Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Puducherry Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Puducherry Integrated GST			
India Puducherry State GST			

Authority	Registration Mask	Explanation	Example(s)
India Punjab Central GST	^03\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	03, followed by thirteen alphanumeric characters.	03AAAAA0000A1Z0; 03A0005555ZZZ12
India Punjab Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Punjab Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Punjab Integrated GST			
India Punjab State GST			
India Rajasthan Central GST	^08\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	08, followed by thirteen alphanumeric characters.	08AAAAA0000A1Z0; 08A0005555ZZZ12
India Rajasthan Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Rajasthan Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Rajasthan Integrated GST			
India Rajasthan State GST			
India Service Tax	^[A-Z0-9]{10}\s?\w{2}\s?\d{3}\$	Ten letters A - Z or numbers 0 - 9 followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	ABCDE1234A ab 123; ABCDE1234Aab 123; ABCDE1234A ab123; ABCDE1234Aab123

Authority	Registration Mask	Explanation	Example(s)
India Service Tax Reverse Charge	<code>^[A-Z0-9]{10}\s?\w{2}\s?\d{3}\$</code>	Ten letters A - Z or numbers 0 - 9 followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	ABCDE1234A ab 123; ABCDE1234Aab 123; ABCDE1234A ab123; ABCDE1234Aab123
India Sikkim Central GST	<code>^11\w{13}\$ ^99\w{13}\$ ^97\w{13}\$</code>	11, followed by thirteen alphanumeric characters.	11AAAAA0000A1Z0; 11A0005555ZZZ12
India Sikkim Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Sikkim Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Sikkim Integrated GST			
India Sikkim State GST			
India Swachh Bharat Cess	<code>^[A-Z0-9]{10}\s?\w{2}\s?\d{3}\$</code>	Ten letters A - Z or numbers 0 - 9 followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	ABCDE1234A ab 123; ABCDE1234Aab 123; ABCDE1234A ab123; ABCDE1234Aab123

Authority	Registration Mask	Explanation	Example(s)
India Swachh Bharat Cess Reverse Charge	<code>^[A-Z0-9]{10}\s?\w{2}\s?\d{3}\$</code>	Ten letters A - Z or numbers 0 - 9 followed by an optional space followed by two alpha-numeric characters followed by an optional space followed by three digits.	ABCDE1234A ab 123; ABCDE1234Aab 123; ABCDE1234A ab123; ABCDE1234Aab123
India Tamil Nadu Central GST	<code>^33\w{13}\$ ^99\w{13}\$ ^97\w{13}\$</code>	33, followed by thirteen alphanumeric characters.	33AAAAA0000A1Z0; 33A0005555ZZZ12
India Tamil Nadu Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Tamil Nadu Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Tamil Nadu Integrated GST			
India Tamil Nadu State GST			
India Telangana Central GST	<code>^36\w{13}\$ ^99\w{13}\$ ^97\w{13}\$</code>	36, followed by thirteen alphanumeric characters.	36AAAAA0000A1Z0; 36A0005555ZZZ12
India Telangana Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Telangana Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Telangana Integrated GST			
India Telangana State GST			

Authority	Registration Mask	Explanation	Example(s)
India Tripura Central GST	^16\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	16, followed by thirteen alphanumeric characters.	16AAAAA0000A1Z0; 16A0005555ZZZ12
India Tripura Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Tripura Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Tripura Integrated GST			
India Tripura State GST			
India Uttar Pradesh Central GST	^09\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	09, followed by thirteen alphanumeric characters.	09AAAAA0000A1Z0; 09A0005555ZZZ12
India Uttar Pradesh Compensation Cess		99, followed by thirteen alphanumeric characters.	99AAAAA0000A1Z0; 99A0005555ZZZ12
India Uttar Pradesh Compensation Cess (Intrastate)		97, followed by thirteen alphanumeric characters.	97AAAAA0000A2Z0; 9700005555ZZZ13
India Uttar Pradesh Integrated GST			
India Uttar Pradesh State GST			

Authority	Registration Mask	Explanation	Example(s)
India Uttarakhand Central GST	^05\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	05, followed by thirteen alphanumeric characters.	05AAAAA0000A1Z0; 05A0005555ZZZ12
India Uttarakhand Compensation Cess			
India Uttarakhand Compensation Cess (Intrastate)			
India Uttarakhand Integrated GST			
India Uttarakhand State GST			
India West Bengal Central GST	^19\w{13}\$ ^99\w{13}\$ ^97\w{13}\$	19, followed by thirteen alphanumeric characters.	19AAAAA0000A1Z0; 19A0005555ZZZ12
India West Bengal Compensation Cess			
India West Bengal Compensation Cess (Intrastate)			
India West Bengal Integrated GST			
India West Bengal State GST			

Authority	Registration Mask	Explanation	Example(s)
Indonesia	<code>^\d{2,3}\.\d{3}\.\d{3}\.\d{1}[\.-]\d{3}\.\d{3}\$ ^\d{15}\$ ^\d{16}\$ ^\d{22}\$</code>	Two or three digits followed by a period followed by three digits followed by a period followed by three digits followed by a period followed by one digit followed by either a period or a dash followed by three digits followed by a period followed by three digits; OR fifteen digits; OR sixteen digits OR twenty two digits.	12.123.123.1.123.123; 12.123.123.1-123.123; 123.123.123.1.123.123; 123.123.123.1-123.123; 123456789012345; 1234567890123456; 1234567890123456789012
Indonesia Luxury Tax	<code>^\d{2,3}\.\d{3}\.\d{3}\.\d{1}[\.-]\d{3}\.\d{3}\$ ^\d{15}\$ ^\d{16}\$ ^\d{22}\$</code>	Two or three digits followed by a period followed by three digits followed by a period followed by three digits followed by a period followed by one digit followed by either a period or a dash followed by three digits followed by a period followed by three digits; OR fifteen digits; OR sixteen digits OR twenty two digits.	12.123.123.1.123.123; 12.123.123.1-123.123; 123.123.123.1.123.123; 123.123.123.1-123.123; 123456789012345; 1234567890123456; 1234567890123456789012

Authority	Registration Mask	Explanation	Example(s)
Ireland	<code>^IE\d{7}[A-Z]{1,2}\$ ^IE\d[A-Z]\d{5}[A-Z]\$ ^IE\d\W\d{5}[A-Z]\$^EU ^IM</code>	IE followed by seven digits and one or two capitalized letters; OR IE followed by one digit followed by one capitalized letter followed by five digits and one capitalized letter; OR IE followed by one digit followed by one non-alphanumeric character (e.g. dash, decimal point, etc.) followed by five digits followed by one capitalized letter; OR EU; OR IM.	IE1234567A; IE1234567AB IE1A12345A; IE1-12345A; EU; IM
Ireland Domestic Reverse Charge	<code>^IE\d{7}[A-Z]{1,2}\$ ^IE\d[A-Z]\d{5}[A-Z]\$ ^IE\d\W\d{5}[A-Z]\$^EU</code>	IE followed by seven digits and one or two capitalized letters; OR IE followed by one digit followed by one capitalized letter followed by five digits and one capitalized letter; OR IE followed by one digit followed by one non-alphanumeric character (e.g. dash, decimal point, etc.) followed by five digits followed by one capitalized letter; OR EU.	IE1234567A; IE1234567AB IE1A12345A; IE1-12345A; EU

Authority	Registration Mask	Explanation	Example(s)
Ireland Low Value Import Duty	<code>^IE\d{7}[A-Z]{1,2}\$ ^IE\d[A-Z]\d{5}[A-Z]\$ ^IE\d\W\d{5}[A-Z]\$ ^EU ^IM</code>	IE followed by seven digits and one or two capitalized letters; OR IE followed by one digit followed by one capitalized letter followed by five digits and one capitalized letter; OR IE followed by one digit followed by one non-alphanumeric character (e.g. dash, decimal point, etc.) followed by five digits followed by one capitalized letter; OR EU; OR IM.	IE1234567A; IE1234567AB IE1A12345A; IE1-12345A; EU; IM
Isle of Man	<code>^(GB)?\d{9}\$ ^(GB)?\d{12}\$ ^EU</code>	An optional GB followed by nine digits; OR an optional GB followed by twelve digits; OR EU.	GB123456789; 123456789; GB123456789012; 123456789012; EU
Isle of Man Plastic Tax	<code>^(GB)?\d{9}\$ ^(GB)?\d{12}\$</code>	An optional GB followed by nine digits; OR an optional GB followed by twelve digits.	GB123456789; 123456789; GB123456789012; 123456789012
Isle of Man Reverse Charge	<code>^IM ^^(GB)?\d{9}\$ ^^(GB)?\d{12}\$ ^EU</code>	IM; OR an optional GB followed by nine digits; OR an optional GB followed by twelve digits; OR EU.	IM; GB123456789; 123456789; GB123456789012; 123456789012; EU
Israel	<code>^\d{9}\$</code>	Nine digits.	123456789

Authority	Registration Mask	Explanation	Example(s)
Italy	^(IT)?\d{11}\$ ^EU ^IM	Optional IT followed by eleven digits; OR EU; OR IM.	IT12345678901; 12345678901; EU; IM
Italy Domestic Reverse Charge	^(IT)?\d{11}\$ ^EU	Optional IT followed by eleven digits; OR EU.	IT12345678901; 12345678901; EU
Italy Low Value Import Duty	^(IT)?\d{11}\$ ^EU ^IM	Optional IT followed by eleven digits; OR EU; OR IM.	IT12345678901; 12345678901; EU; IM
Italy Private Copy Levy	^(IT)?\d{11}\$ ^EU	Optional IT followed by eleven digits; OR EU.	IT12345678901; 12345678901; EU
Jamaica	^\d{3}\-\d{3}\-\d{3} \d{9}	Three digits followed by a dash followed by three digits followed by a dash followed by three digits; OR nine digits.	123-456-789; 123456789
Japan	^\d{13}\$ ^\d{5}\$ ^\d{2}s?\d{2}s?\d{2}s?\d{2}\$ ^\d{2}\$ ^\d{13}\$	Thirteen digits; OR Five digits; OR eight digits; OR T followed by thirteen digits.	1234567890123; 12345; 12 12 12 12; 1212 12 12; 121212 12; 12121212; 12 121212; 12 12 1212; 12 12 12 12; 1212 12 12; 121212 12; 12121212; 12121212; 12 12 1212; T1234567890123
Jersey GST	^\d{7}\$	Seven digits.	1234567
Kazakhstan	^\d{12}\$	Twelve digits.	123456789012
Kenya	^\d{7}\w{1}\$ ^\w{11}\$	Seven digits followed by one alpha-numeric character; OR eleven alpha-numeric characters.	1234567i; 1234567A; 1234567a; 1234567890W
Kosovo	^3\d{8}\$	3 followed by eight digits.	312345678
Kyrgyzstan	^\d{14}\$	Fourteen digits.	12345678901234
Laos	^\d{12}\$	Twelve digits.	123456789012

Authority	Registration Mask	Explanation	Example(s)
Latvia	<code>^LV\d{11}\$ ^LV\s\d{4}\s\d{3}\s\d{4}\$ ^EU ^IM</code>	LV followed by eleven digits; OR LV followed by a space followed by four digits followed by a space followed by three digits followed by a space followed by four digits; OR EU; OR IM.	LV12345678901; LV 1234 123 1234; EU; IM
Latvia Domestic Reverse Charge	<code>^LV\d{11}\$ ^LV\s\d{4}\s\d{3}\s\d{4}\$ ^EU</code>	LV followed by eleven digits; OR LV followed by a space followed by four digits followed by a space followed by three digits followed by a space followed by four digits; OR EU.	LV12345678901; LV 1234 123 1234; EU
Latvia Low Value Import Duty	<code>^LV\d{11}\$ ^LV\s\d{4}\s\d{3}\s\d{4}\$ ^EU ^IM</code>	LV followed by eleven digits; OR LV followed by a space followed by four digits followed by a space followed by three digits followed by a space followed by four digits; OR EU; OR IM.	LV12345678901; LV 1234 123 1234; EU; IM
Latvia Private Copy Levy	<code>^LV\d{11}\$ ^LV\s\d{4}\s\d{3}\s\d{4}\$ ^EU</code>	LV followed by eleven digits; OR LV followed by a space followed by four digits followed by a space followed by three digits followed by a space followed by four digits; OR EU.	LV12345678901; LV 1234 123 1234; EU

Authority	Registration Mask	Explanation	Example(s)
Lesotho	<code>^5\d{7}\$</code>	Digit five followed by seven digits.	51234567
Liberia	<code>^\d{9}\$</code>	Nine digits.	123456789
Liechtenstein	<code>^\d{2}\s\d{3}\$ ^\d{5}\$</code>	Two digits followed by a space followed by three digits; OR five digits.	12 123; 12345
Liechtenstein Recycling Fees	<code>^\d{2}\s\d{3}\$ ^\d{5}\$</code>	Two digits followed by a space followed by three digits; OR five digits.	12 123; 12345
Lithuania	<code>^LT\d{9}\$ ^LT\d{12}\$ ^LT\d{4}\s\d{3}\s\d{2}\$ ^EU ^IM</code>	LT followed by nine digits; OR LT followed by twelve digits; OR LT followed by four digits followed by a space followed by three digits followed by a space followed by two digits; OR EU; OR IM.	LT123456789; LT123456789012; LT1234 123 12; EU; IM
Lithuania Domestic Reverse Charge	<code>^LT\d{9}\$ ^LT\d{12}\$ ^LT\d{4}\s\d{3}\s\d{2}\$ ^EU</code>	LT followed by nine digits; OR LT followed by twelve digits; OR LT followed by four digits followed by a space followed by three digits followed by a space followed by two digits; OR EU.	LT123456789; LT123456789012; LT1234 123 12; EU

Authority	Registration Mask	Explanation	Example(s)
Lithuania Low Value Import Duty	<code>^LT\d{9}\$ ^LT\d{12}\$ ^LT\d{4}\s\d{3}\s\d{2}\$ ^EU ^IM</code>	LT followed by nine digits; OR LT followed by twelve digits; OR LT followed by four digits followed by a space followed by three digits followed by a space followed by two digits; OR EU; OR IM.	LT123456789; LT123456789012; LT1234 123 12; EU; IM
Luxembourg	<code>^LU\d{8}\$ ^EU ^IM</code>	LU followed by eight digits; OR EU; OR IM.	LU12345678; EU; IM
Luxembourg Domestic Reverse Charge	<code>^LU\d{8}\$ ^EU</code>	LU followed by eight digits; OR EU.	LU12345678; EU
Luxembourg Low Value Import Duty	<code>^LU\d{8}\$ ^EU ^IM</code>	LU followed by eight digits; OR EU; OR IM.	LU12345678; EU; IM
Luxembourg Recycling Fees	<code>^LU\d{8}\$ ^EU</code>	LU followed by eight digits; OR EU.	LU12345678; EU
Macedonia	<code>^MK\d{13}\$</code>	MK followed by thirteen digits.	MK1234567890123
Malawi	<code>^\d{8}\$</code>	Eight digits.	12345678
Malaysia	<code>^[A-Z]\d{2}-?\d{4}-?\d{8}\$</code>	One capitalized letter A-Z followed by two digits followed by an optional dash followed by four digits followed by an optional dash followed by eight digits.	A12-1234-12345678; A12123412345678; A121234-12345678; A12- 123412345678

Authority	Registration Mask	Explanation	Example(s)
Malaysia GST	<code>^\w-\d{10} \w\d{6} \w{3}-\w{2}-\d{8}(\d{4})? ^(W\d{2}-)?\d{8}/\d{2,4}\$ ^\d{12}\$</code>	One alpha-numeric character followed by a dash followed by ten digits; OR one alpha-numeric character followed by six digits; OR three alpha-numeric characters followed by a dash followed by two alpha-numeric characters followed by a dash followed by eight digits followed by an optional forward slash and four digits; OR optional W and two digits and a dash followed by eight digits followed by two or four digits; OR twelve digits.	a-1234567890; a123456; abc-ab-12345678/1234; abc-ab-12345678; W10-01000174/2001; W10-01000174/01; 01000174/2001; 01000174/01; 123456789012
Malaysia Service Tax	<code>^[A-Z]\d{2}-?\d{4}-?\d{8}\$ ^\d{8}\$</code>	One capitalized letter A-Z followed by two digits followed by an optional dash followed by four digits followed by an optional dash followed by eight digits; OR eight digits.	A12-1234-12345678; A12123412345678; A121234-12345678; A12-123412345678; 12345678

Authority	Registration Mask	Explanation	Example(s)
Malaysia Tax Free	<code>^\w-\d{10} \w\d{6} \w{3}-\w{2}-\d{8}(/d{4})? ^(W\d{2}-)?\d{8}/\d{2,4}\$ ^\d{12}\$</code>	One alpha-numeric character followed by a dash followed by ten digits; OR one alpha-numeric character followed by six digits; OR three alpha-numeric characters followed by a dash followed by two alpha-numeric characters followed by a dash followed by eight digits followed by an optional forward slash and four digits; OR optional W and two digits and a dash followed by eight digits followed by two or four digits; OR twelve digits.	a-1234567890; a123456; abc-ab-12345678/1234; abc-ab-12345678; W10-01000174/2001; W10-01000174/01; 01000174/2001; 01000174/01; 123456789012
Maldives	<code>^\d{7}GST\d{3}\$</code>	Seven digits followed by GST followed by three digits.	1234567GST123
Malta	<code>^(MT)?\d{8}\$ ^EU ^IM</code>	An optional MT followed by eight digits; OR EU; OR IM.	MT12345678; 12345678; EU; IM
Malta Low Value Import Duty	<code>^(MT)?\d{8}\$ ^EU ^IM</code>	An optional MT followed by eight digits; OR EU; OR IM.	MT12345678; 12345678; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Manitoba	<code>^\d{6}\-\d\$ ^\d{7}\$ ^\d{9}MT ^\d{9}MC</code>	Six digits followed by a dash followed by one digit; OR seven digits; OR nine digits followed by MT; OR nine digits followed by MC.	123456-7; 1234567; 123456789MT; 123456789MC
Manitoba	<code>^\d{6}\-\d\$ ^\d{7}\$ ^\d{9}MT ^\d{9}MC</code>	Six digits followed by a dash followed by one digit; OR seven digits; OR nine digits followed by MT; OR nine digits followed by MC.	123456-7; 1234567; 123456789MT; 123456789MC
Mauritius	<code>^VAT\d{8}\$ ^VAT\s\d{4}\s\d{4}\$</code>	VAT followed by eight digits; OR VAT followed by a space followed by four digits followed by a space followed by four digits.	VAT12345678; VAT 1234 1234
Mexico	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc

Authority	Registration Mask	Explanation	Example(s)
Mexico Frontier Zone	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Mexico Frontier Zone - Southern Region	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Mexico IEPS	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc

Authority	Registration Mask	Explanation	Example(s)
Mexico IEPS Additional Fee	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Mexico IEPS Fee	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Mexico IEPS Withholding	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc

Authority	Registration Mask	Explanation	Example(s)
Mexico ISR Withholding	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Mexico IVA Withholding	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Mexico - Impuesto a la Venta Final	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc

Authority	Registration Mask	Explanation	Example(s)
Mexico - Impuesto sobre Entretenimiento	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Mexico - Impuesto Sobre Hospedaje	<code>^[A-Z&]{3,4}-?\d{6}-?\w{3}\$</code>	Any combination of three or four of the following characters: capitalized letters A through Z and "&"; followed by an optional dash and six digits followed by an optional dash followed by any three alpha-numeric characters.	ABC-123456-abc; AB&-123456-abc; ABCD-123456-abc; ABC123456-abc; ABCD123456-abc; ABC123456abc; ABCD123456abc
Moldova	<code>^\d{7,8}\$ ^E\d{12}\$</code>	Seven or eight digits; OR E followed by twelve digits.	1234567; 12345678; E123456789012
Mongolia	<code>^\d{7}\$ ^E\d{11,12}\$</code>	seven digits; OR eleven digits; OR twelve digits.	1234567 ;12345678901; 123456789012

Authority	Registration Mask	Explanation	Example(s)
Montenegro	<code>^ME\d{8}\$ ^d{2}\d{2}-\d{5}-\d{1}\$</code>	ME followed by 8 digits; OR Two digits followed by a front slash followed by two digits followed by a dash followed by five digits followed by a dash followed by one digit.	ME12345678; 12/34-56789-0
Morocco	<code>^d{2}s?d{4}s?d{1,2}\$</code>	Two digits followed by an optional space followed by four digits followed by an optional space followed by one or two digits.	12 1234 1; 12 1234 12; 12 12341; 12 123412; 121234 1; 121234 12
Mozambique	<code>^d{9}\$</code>	Nine digits.	123456789
Namibia	<code>^d{7}\$</code>	Seven digits.	1234567
Nepal	<code>^d{9}\$</code>	Nine digits.	123456789
Netherlands	<code>^NL\d{9}B\d{2}\$ ^EU ^IM</code>	NL followed by nine digits followed by a B followed by two digits; OR EU; OR IM.	NL123456789B12; EU; IM
Netherlands Domestic Reverse Charge	<code>^NL\d{9}B\d{2}\$ ^EU</code>	NL followed by nine digits followed by a B followed by two digits; OR EU.	NL123456789B12; EU
Netherlands Low Value Import Duty	<code>^NL\d{9}B\d{2}\$ ^EU ^IM</code>	NL followed by nine digits followed by a B followed by two digits; OR EU; OR IM.	NL123456789B12; EU; IM
Netherlands Private Copy Levy	<code>^NL\d{9}B\d{2}\$ ^EU</code>	NL followed by nine digits followed by a B followed by two digits; OR EU.	NL123456789B12; EU

Authority	Registration Mask	Explanation	Example(s)
New Brunswick	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234
New Caledonia	<code>^(0 1)\d{6}\$</code>	0 or 1 followed by six digits.	0123456; 1234567
New Zealand	<code>^\d{2,3}-?\d{3}-?\d{3}\$</code>	Two or three digits followed by an optional dash followed by three digits followed by an optional dash followed by three digits.	12-123-123; 123-123-123; 12123-123; 123123-123; 12-123123; 123-123123; 12123123; 123123123
Newfoundland	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234
Newfoundland Fees	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234

Authority	Registration Mask	Explanation	Example(s)
Nicaragua	<code>^\d{4}\-?\d{6}\-?\d{3}\-?\w\$\^\w\-\d{3}\-?\d{6}\-?\d{4}\$^\d{4}\-?\d{6}\-?\d{4}\$</code>	Four digits followed by an optional dash followed by six digits followed by an optional dash followed by four digits or three digits and a letter or number; OR a letter or number followed by an optional dash followed by three digits followed by an optional dash followed by six digits followed by an optional dash followed by four digits.	1234123456123A; A1231234561234; 12341234561234; 1234-123456-123-A; A-123-123456-1234; 1234-123456-1234
Nigeria	<code>^([A-Z]{3})?\.\?(\d{8} \d{10})(-\d{4})?\$/^([A-Z]{3})?\?(\d{8} \d{10})(-\d{4})?\$/^\d{8}\-\d{4}\$</code>	An optional three upper case letters followed by an optional period and eight digits; OR an optional three upper case letters followed by an optional period and ten digits; OR eight digits; OR ten digits; OR three optional upper case letters followed by ten digits followed by an optional dash and four digits.	AAA.12345678; AAA12345678; 12345678; AAA.1234567891; AAA1234567891; 1234567891; AAA.1234567891-1234; AAA1234567891-1234; 1234567891-1234; 1234567891-1234; AAA1234567891-1234, 12345678-1234

Authority	Registration Mask	Explanation	Example(s)
Northern Ireland	<code>^XI\d{9}\$ ^XI\d{12}\$ ^XI[A-Z]{2}\d{3}\$ ^EU ^IM</code>	XI followed by nine digits; OR XI followed by twelve digits; OR XI followed by any two capitalized letters A - Z followed by three digits; OR EU; OR IM.	XI123456789; XI123456789012; XIAB123; EU; IM
North Macedonia	<code>^MK\d{13}\$</code>	MK followed by thirteen digits.	MK1234567890123
Norway	<code>^(NO)?\s?\d{3}\s?\d{3}\s?\d{3}(\s?MVA)?\$\d{7}\$</code>	Optional NO followed by an optional space followed by three digits followed by an optional space followed by three digits followed by an optional space followed by three digits followed by an optional space followed by an optional MVA; OR seven digits.	NO 123 123 123 MVA; 123 123 123 MVA; NO123 123 123 MVA; NO123123 123 MVA; 123123123 MVA; NO123123123MVA; 123123123MVA; NO 123123123 MVA; NO 123123123MVA; NO 123 123 123; 123 123 123; NO123 123 123; NO123123 123; 123123 123; NO123123123; 123123123; NO 123123123; 1234567
Nova Scotia	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234

Authority	Registration Mask	Explanation	Example(s)
Nova Scotia Fees	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234
Oman	<code>^OM\d{9}\w\$</code>	OM followed by 9 digits and followed by alpha-numeric character.	OM1234567890; OM123456789X
Ontario	<code>^\d{4}\-\d{4}\$ ^\d{8}\$ ^\d{9}TR</code>	Four digits followed by a dash followed by four digits; OR eight digits; OR nine digits followed by TR.	1234-1234; 12345678; 123456789TR
Ontario Fees	<code>^\d{4}\-\d{4}\$ ^\d{8}\$ ^\d{9}TR</code>	Four digits followed by a dash followed by four digits; OR eight digits; OR nine digits followed by TR.	1234-1234; 12345678; 123456789TR
Ontario HST	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234

Authority	Registration Mask	Explanation	Example(s)
Pakistan	<code>^\d{7}-\d{1}\$ ^\d{13}\$ ^\d{7}\$ ^[A-Z]\d{6}(-\d{1})?\$</code>	Seven digits or seven digits followed by a dash, followed by one digit, OR thirteen digits, OR one capital letter followed by six digits OR one capital letter followed by six digits, followed by a dash, followed by one digit.	1234567; 1234567-1; 1234567890123; A123456; A123456-1
Pakistan Additional Tax	<code>^\d{7}-\d{1}\$ ^\d{13}\$ ^\d{7}\$ ^[A-Z]\d{6}(-\d{1})?\$</code>	Seven digits or seven digits followed by a dash, followed by one digit, OR thirteen digits, OR one capital letter followed by six digits OR one capital letter followed by six digits, followed by a dash, followed by one digit.	1234567; 1234567-1; 1234567890123; A123456; A123456-1
Pakistan Manufacturer Additional Tax	<code>^\d{7}-\d{1}\$ ^\d{13}\$ ^\d{7}\$ ^[A-Z]\d{6}(-\d{1})?\$</code>	Seven digits or seven digits followed by a dash, followed by one digit, OR thirteen digits, OR one capital letter followed by six digits OR one capital letter followed by six digits, followed by a dash, followed by one digit.	1234567; 1234567-1; 1234567890123; A123456; A123456-1

Authority	Registration Mask	Explanation	Example(s)
Panama	<code>^\d{1,9}-?(NT)?-\d{1,4}-\d{1,6}((\sDV(?:- :)?)(\s?\d{1,2}))?\$ \d{5,27}</code>	One to nine digits followed by an optional dash followed by an optional NT followed by one to four digits followed by a dash followed by one to six digits followed by an optional space and DV plus an optional space and one or two digits; OR five to twenty-seven digits.	123-1-123; 123456789-1234-123456; 123-1-123456; 123-123-123; 1234567-1-123; 1234567-123-123; 123-1-123 DV 1; 123-1-123 DV 12; 123-1-123 1; 123-1-123 12; 1234567-123-123456 DV 1; 1234567-123-123456 DV 12; 1234567-123-123456 1; 1234567-123-123456 12; 123-1-123456 DV 1; 123-1-123456 DV 12; 123-1-123456 1; 123-1-123456 12; 123-123-123 DV 1; 123-123-123 DV 12; 123-123-123 1; 123-123-123 12; 1234567-1-123 DV 1; 1234567-1-123 DV 12; 1234567-1-123 1; 1234567-1-123 12; 1234567-123-123 DV 1; 1234567-123-123 DV 12; 1234567-123-123 1; 1234567-123-123 12; 1-NT-1-12345 DV12
Papua New Guinea	<code>^(GS VT)\s?\d{4,5}\$ ^\d{9}\$</code>	GS Or VT followed by an optional space followed by four or five digits, Or nine digits.	GS 1234; GS1234; GS 12345; GS12345; VT 1234; VT1234; VT 12345; VT12345; 123456789
Paraguay	<code>^\d{2,7}[0-9AB]?(\d -)\d?\$</code>	Two to seven digits followed by either one optional digit 0 - 9 or a capital letter A or a capital letter B followed by an optional dash and one digit.	12345678; 12345678-1; 123456781; 1324567A; 1234567B; 1324567A-1; 1234567B-1; 1324567A1; 1324567B1; 12A; 12A-1; 12A1; 12; 12-1; 121

Authority	Registration Mask	Explanation	Example(s)
Peru	<code>^\d{3}\s\d{3}\s\d{3}\s\d{2}^\d{11}</code>	Three digits followed by a space followed by three digits followed by a space followed by three digits followed by a space followed by two digits; OR eleven digits.	123 123 123 12; 12345678901
Peru Municipal Rate	<code>^\d{3}\s\d{3}\s\d{3}\s\d{2}^\d{11}</code>	Three digits followed by a space followed by three digits followed by a space followed by three digits followed by a space followed by two digits; OR eleven digits.	123 123 123 12; 12345678901

Authority	Registration Mask	Explanation	Example(s)
Philippines	<code>^\d{3}([-]?)\d{3}\1\d{3}(\1\d{3}(\d{2})?)?([-]?)?VAT)?\$</code>	Nine digits; OR three digits followed by the space or dash followed three digits followed by the space or dash followed by the three digits; OR twelve digits; OR three digits followed by the space or dash followed by the three digits followed by the space or dash followed by three digits followed by the space or dash followed by the three digits followed by an optional 2 digits followed by an optional space or dash followed by optional VAT.	123456789; 123 123 123; 123-123-123; 123456789012; 123 123 123 123; 123-123-123-123; 12345678912345; 123 123 123 12345; 123-123- 123-12345; 123-123-123- 123 VAT; 123-123-123- 12345 VAT

Authority	Registration Mask	Explanation	Example(s)
Poland	^(PL)?\s?\d{10}\$ ^(PL)?\s?\d{3}-\d{2}-\d{2}-\d{3}\$ ^(PL)?\s?\d{3}-\d{3}-\d{2}-\d{2}\$ ^EU ^IM	Optional PL followed by an optional space followed by ten digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits followed by three digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits; OR EU; OR IM.	PL 1234567890; PL 123-12-12-123; 123-12-12-123; PL1234567890; 1234567890; PL 123-123-12-12; PL123-123-12-12; 123-123-12-12; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Poland Domestic Reverse Charge	^(PL)?\s?\d{10}\$ ^(PL)?\s?\d{3}-\d{2}-\d{2}-\d{3}\$ ^(PL)?\s?\d{3}-\d{3}-\d{2}-\d{2}\$ ^EU	Optional PL followed by an optional space followed by ten digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits followed by three digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits; OR EU.	PL 1234567890; PL 123-12-12-123; 123-12-12-123; PL1234567890; 1234567890; PL 123-123-12-12; PL123-123-12-12; 123-123-12-12; EU

Authority	Registration Mask	Explanation	Example(s)
Poland Low Value Import Duty	^(PL)?\s?\d{10}\$ ^(PL)?\s?\d{3}-\d{2}-\d{2}-\d{3}\$ ^(PL)?\s?\d{3}-\d{3}-\d{2}-\d{2}\$ ^EU ^IM	Optional PL followed by an optional space followed by ten digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits followed by three digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits; OR EU; OR IM.	PL 1234567890; PL 123-12-12-123; 123-12-12-123; PL1234567890; 1234567890; PL 123-123-12-12; PL123-123-12-12; 123-123-12-12; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Poland Private Copy Levy	^(PL)?\s?\d{10}\$ ^(PL)?\s?\d{3}-\d{2}-\d{2}-\d{3}\$ ^(PL)?\s?\d{3}-\d{3}-\d{2}-\d{2}\$ ^EU	Optional PL followed by an optional space followed by ten digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits followed by three digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits; OR EU.	PL 1234567890; PL 123-12-12-123; 123-12-12-123; PL1234567890; 1234567890; PL 123-123-12-12; PL123-123-12-12; 123-123-12-12; EU

Authority	Registration Mask	Explanation	Example(s)
Poland Plastic Tax	^(PL)?\s?\d{10}\$ ^(PL)?\s?\d{3}-\d{2}-\d{2}-\d{3}\$ ^(PL)?\s?\d{3}-\d{3}-\d{2}-\d{2}\$ ^EU ^IM	Optional PL followed by an optional space followed by ten digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits followed by three digits; OR optional PL followed by an optional space followed by three digits followed by a dash followed by three digits followed by a dash followed by two digits followed by a dash followed by two digits; OR EU; OR IM.	PL 1234567890; PL 123-12-12-123; 123-12-12-123; PL1234567890; 1234567890; PL 123-123-12-12; PL123-123-12-12; 123-123-12-12; EU; IM
Portugal	^PT\d{9}\$ ^EU ^IM	PT followed by nine digits; OR EU; OR IM.	PT123456789; EU; IM
Portugal Autonomous Regions - Azores	^PT\d{9}\$ ^EU	PT followed by nine digits; OR EU.	PT123456789; EU
Portugal Autonomous Regions - Azores Low Value Import Duty	^PT\d{9}\$ ^EU	PT followed by nine digits; OR EU.	PT123456789; EU
Portugal Autonomous Regions - Madeira	^PT\d{9}\$ ^EU	PT followed by nine digits; OR EU.	PT123456789; EU

Authority	Registration Mask	Explanation	Example(s)
Portugal Autonomous Regions - Madeira Low Value Import Duty	<code>^PT\d{9}\$ ^EU</code>	PT followed by nine digits; OR EU.	PT123456789; EU
Portugal Domestic Reverse Charge	<code>^PT\d{9}\$ ^EU</code>	PT followed by nine digits; OR EU.	PT123456789; EU
Portugal Low Value Import Duty	<code>^PT\d{9}\$ ^EU ^IM</code>	PT followed by nine digits; OR EU; OR IM.	PT123456789; EU; IM
Portugal Private Copy Levy	<code>^PT\d{9}\$ ^EU</code>	PT followed by nine digits; OR EU.	PT123456789; EU
Prince Edward Island	<code>^\d{6}\s\d{4}\$ ^\d{10}\$ ^\d{6}\$</code>	Six digits followed by a space followed by four digits; OR ten digits; OR six digits.	123456 1234; 1234567890; 123456
Prince Edward Island HST	<code>^\d{9}(RT(\d{4})?)?\$ ^\d{9}RR\d{4}\$</code>	Nine digits followed by an optional RT followed by an optional four digits (the last four optional digits will not be used without the RT); OR nine digits followed by RR and four digits.	123456789; 123456789RT; 123456789RT1234; 123456789RR1234
Prince Edward Island Fees	<code>^\d{6}\s\d{4}\$ ^\d{10}\$ ^\d{6}\$</code>	Six digits followed by a space followed by four digits; OR ten digits; OR six digits.	123456 1234; 1234567890; 123456
Puerto Rico Sales/Use Tax	<code>^\d{7}(- \s)?\d{4}\$</code>	Seven digits followed by an optional space or dash followed by four digits.	12345678912; 1234657- 1234; 1234567 1234

Authority	Registration Mask	Explanation	Example(s)
Quebec	$\wedge \backslash d\{10\} TQ(\backslash d\{4\}) ? \wedge N R \backslash d\{8\} \$$	Ten digits followed by TQ followed by four optional digits; OR NR followed by eight digits.	1234567890TQ; 1234567890TQ1234; NR12345678
Quebec Fees	$\wedge \backslash d\{10\} TQ(\backslash d\{4\}) ? \$$	Ten digits followed by TQ followed by four optional digits.	1234567890TQ; 1234567890TQ1234
Romania	$\wedge R O \backslash d\{2,10\} \$ \wedge E U \wedge I M$	RO followed by two to ten digits; OR EU; OR IM.	RO12; RO123; RO1234; RO12345; RO123456; RO1234567; RO12345678; RO123456789; RO1234567890; EU; IM
Romania Domestic Reverse Charge	$\wedge E U \wedge R O \backslash d\{2,10\} \$$	EU; OR RO followed by two to ten digits.	EU; RO12; RO123; RO1234; RO12345; RO123456; RO1234567; RO12345678; RO123456789; RO1234567891
Romania Low Value Import Duty	$\wedge R O \backslash d\{2,10\} \$ \wedge E U \wedge I M$	RO followed by two to ten digits; OR EU; OR IM.	RO12; RO123; RO1234; RO12345; RO123456; RO1234567; RO12345678; RO123456789; RO1234567890; EU; IM
Russia	$\wedge \backslash d\{10\} \$ \wedge \backslash d\{4\} \backslash s \backslash d\{5\} \backslash s \backslash d\{1\} \$ \wedge \backslash d\{12\} \$$	Ten digits; OR four digits followed by a space followed by five digits followed by a space followed by one digit; OR twelve digits.	1234567890; 1234 12345 1; 123456789012
Russia Private Copy Levy	$\wedge \backslash d\{10\} \$ \wedge \backslash d\{4\} \backslash s \backslash d\{5\} \backslash s \backslash d\{1\} \$$	Ten digits; OR four digits followed by a space followed by five digits followed by a space followed by one digit.	1234567890; 1234 12345 1
Rwanda	$\wedge \backslash d\{9\} \$$	Nine digits.	123456789

Authority	Registration Mask	Explanation	Example(s)
Saint Lucia	<code>^\d{2,6}-?\d{2}\$</code>	From two to six digits followed by an optional dash followed by two digits.	12345678; 1234567; 123456;12345;1234; 123456-12; 12345-12; 1234-12; 123-12; 12-12
San Marino	<code>^SM\d{5}\$</code>	SM followed by five digits.	SM12345
Saskatchewan	<code>^\d{7}\$</code>	Seven digits.	1234567
Saskatchewan Fees	<code>^\d{7}\$</code>	Seven digits.	1234567
Saudi Arabia	<code>^3\d{14}\$</code>	3 followed by 14 digits.	323456789012345
Senegal	<code>^\d{9}(\d{4})?(\d[a-zA-Z]\d)?^[A-Z]{2}(-\s)?[A-Z]{3}(-\s)?\d{4}(-\s)?[A-Z](-\s)?\d{3,5}\$</code>	Nine digits followed by an optional four digits followed by an optional one digit and an optional letter and an optional digit; OR two capital letters followed by an optional space or dash followed by three capital letters followed by an optional space or dash followed by four digits followed by an optional space or dash followed by a capital letter followed by an optional space or dash followed by three to five digits.	123456789; 1234567891234; 12345678912341a1; 1234567891a1; AB ABC 1234 A 1234; AB-ABC-1234-A-1234; ABABC1234A12345
Serbia	<code>^\d{9}\$</code>	Nine digits.	123456789
Serbia Financial Transaction Tax	<code>^\d{9}\$</code>	Nine digits.	123456789
Serbia Sales Tax	<code>^\d{9}\$</code>	Nine digits.	123456789
Seychelles	<code>^\d{9}\$</code>	Nine digits.	123456789

Authority	Registration Mask	Explanation	Example(s)
Sierra Leone	<code>^\w{7}-\w\$</code>	Seven alpha-numeric characters followed by a dash followed by one alpha-numeric character.	1234567-1; 1234567-a; abcdefg-1; abcdefg-a
Shanghai VAT	<code>^\d{3}\s?\d{3}(\s?\w{3}\s?\w{3}\s?\w{3} \w{12} \w{14})\$</code>	Three digits followed by an optional space followed by three digits followed by one of the following options: an optional space followed by three alpha-numeric characters followed by optional space followed by three alpha-numeric characters followed by three alpha-numeric characters followed by an optional space followed by three alpha-numeric characters; OR twelve alpha-numeric characters; OR fourteen alpha-numeric characters.	123 123 abc abc abc; 123 123 abcabcabc; 123123 abc abc abc; 123123abc abc abc; 123123abcabc abc; 123123abcabcabc; 123456789012; 12345678901234

Authority	Registration Mask	Explanation	Example(s)
Singapore	<code>^\w{2}-?\d{7}- ?\w\$ ^{\d{8,9}}\w\$^[TS]\d{2}[A- Z]\w\d{4}\w\$</code>	Two alpha-numeric characters followed by an optional dash followed by seven digits followed by an optional dash followed by one alpha-numeric character; OR eight or nine digits followed by one alpha-numeric character; OR TorS followed by two digits followed by one capitalized letter A - Z followed by one alpha-numeric character followed by four digits followed by one alpha-numeric character.	ab-1234567-a; ab1234567-a; ab1234567a; ab- 1234567a; 12345678a; 123456789a; T12Aa1234a
Slovakia	<code>^SK\d{10}\$ ^SK\d{9}\$ ^EU ^IM</code>	SK followed by ten digits; OR SK followed by nine digits; OR EU; OR IM.	SK1234567890; SK123456789; EU; IM
Slovakia Domestic Reverse Charge	<code>^SK\d{10}\$ ^SK\d{9}\$ ^EU</code>	SK followed by ten digits; OR SK followed by nine digits; OR EU.	SK1234567890; SK123456789; EU
Slovakia Low Value Import Duty	<code>^SK\d{10}\$ ^SK\d{9}\$ ^EU ^IM</code>	SK followed by ten digits; OR SK followed by nine digits; OR EU; OR IM.	SK1234567890; SK123456789; EU; IM
Slovakia Recycling Fees	<code>^SK\d{10}\$ ^SK\d{9}\$ ^EU</code>	SK followed by ten digits; OR SK followed by nine digits; OR EU.	SK1234567890; SK123456789; EU

Authority	Registration Mask	Explanation	Example(s)
Slovenia	<code>^SI\d{8}\$ ^EU ^IM</code>	SI followed by eight digits; OR EU; OR IM.	SI12345678; EU; IM
Slovenia Domestic Reverse Charge	<code>^SI\d{8}\$ ^EU</code>	SI followed by eight digits; OR EU.	SI12345678; EU
Slovenia Low Value Import Duty	<code>^SI\d{8}\$ ^EU ^IM</code>	SI followed by eight digits; OR EU; OR IM.	SI12345678; EU; IM
South Africa	<code>^4\d{9}\$ ^4\d{2}\s\d{4}\s\d{3}\$</code>	4 followed by 9 digits; OR 4 followed by two digits followed by a space followed by four digits followed by a space followed by three digits.	4123456789; 412 3456 789
South Korea	<code>^\d{3}\-\d{2}\-\d{5}\$ ^\d{10}\$</code>	Three digits followed by a dash followed by two digits followed by a dash followed by five digits; OR ten digits.	123-12-12345; 1234567890
Spain	<code>^(ES)?[A-Z0-9]\d{7}[A-Z0-9]\$ ^EU ^IM</code>	Optional ES followed by either a capitalized letter A - Z or a digit 0 - 9 followed by seven digits followed by either a capitalized letter A - Z or a digit 0 - 9; OR EU; OR IM.	ESA1234567A; A1234567A; ES11234567A; 11234567A; ES112345671; 112345671; EU; IM
Spain Domestic Reverse Charge	<code>^(ES)?[A-Z0-9]\d{7}[A-Z0-9]\$ ^EU</code>	Optional ES followed by either a capitalized letter A - Z or a digit 0 - 9 followed by seven digits followed by either a capitalized letter A - Z or a digit 0 - 9; OR EU.	ESA1234567A; A1234567A; ES11234567A; 11234567A; ES112345671; 112345671; EU

Authority	Registration Mask	Explanation	Example(s)
Spain Low Value Import Duty	^(ES)?[A-Z0-9]\d{7}[A-Z0-9]\$ ^EU ^IM	Optional ES followed by either a capitalized letter A - Z or a digit 0 - 9 followed by seven digits followed by either a capitalized letter A - Z or a digit 0 - 9; OR EU; OR IM.	ESA1234567A; A1234567A; ES11234567A; 11234567A; ES112345671; 112345671; EU; IM
Spain Plastic Tax	^ES000\w{2}[A-Z]{2}\d{3}[A-Z]{1}\$	ES000 followed by two alpha-numeric characters followed by two capitalized letters A-Z followed by three digits followed by one capitalized letter A-Z.	ES00012AB123A
Sri Lanka	^\d{9}(-\d{4})?\$	Nine digits followed by an optional dash and four digits.	123456789; 123456789-1234
Suriname	^\d{5}\$ ^\d{6}\$ ^\d{8}\$ ^\d{10}\$ ^\d+\$	Five, six, eight, ten or any number of digits.	12345; 123456; 12345678; 1234567891
Swaziland	^\d{3}-\d{3}-\d{3}\$	Three digits followed by a dash, followed by three digits, followed by a dash, followed by three digits.	123-456-789
Sweden	^SE\d{12}\$ ^EU ^IM	SE followed by twelve digits; OR EU; OR IM.	SE123456789012; EU; IM
Sweden Domestic Reverse Charge	^SE\d{12}\$ ^EU	SE followed by twelve digits; OR EU.	SE123456789012; EU
Sweden Low Value Import Duty	^SE\d{12}\$ ^EU ^IM	SE followed by twelve digits; OR EU; OR IM.	SE123456789012; EU; IM

Authority	Registration Mask	Explanation	Example(s)
Sweden Private Copy Levy	<code>^SE\d{12}\$ ^EU</code>	SE followed by twelve digits; OR EU.	SE123456789012; EU
Switzerland	<code>^(CH)?\d{3}(\s)?\d{3}\$ ^CHE-?\d{3}\.?\d{3}\.?\d{3}(\s)?(((HR/?)?MWST) ((RC/?)?(TVA IVA))))?\$</code>	Optional CH followed by three digits and an optional space followed by three digits; OR CHE followed by an optional dash followed by three digits followed by an optional period followed by three digits followed by an optional period followed by three digits followed by an optional space followed by an optional HR and optional slash followed by MWST or optional RC and optional slash followed by TVA or IVA.	There are 120 possible options: CH123 123; CH123123; 123 123; 123123 Or CHE-123123123 CHE-123.123123 CHE-123123.123 CHE-123.123.123 CHE123123123 CHE123.123123 CHE123123.123 CHE123.123.123 followed by one of the following options: HR/MWST HRMWST MWST RC/TVA RC/IVA TVA IVA (+ no ending) w/space at end (before ending above) w/o space at end (before ending above)

Authority	Registration Mask	Explanation	Example(s)
Switzerland Recycling Fees	<code>^(CH)?\d{3}(\s)?\d{3}\$ ^CHE- ?\d{3}\.?\d{3}\.?\d{3}(\s)?(((HR/)?MWST) ((RC/)?(TVA IVA))))?\$</code>	Optional CH followed by three digits and an optional space followed by three digits; OR CHE followed by an optional dash followed by three digits followed by an optional period followed by three digits followed by an optional space followed by an optional HR and optional slash followed by MWST or optional RC and optional slash followed by TVA or IVA.	There are 120 possible options: CH123 123; CH123123; 123 123; 123123 Or CHE-123123123 CHE-123.123123 CHE-123123.123 CHE-123.123.123 CHE123123123 CHE123.123123 CHE123123.123 CHE123.123.123 followed by one of the following options: HR/MWST HRMWST MWST RC/TVA RC/IVA TVA IVA (+ no ending) w/space at end (before ending above) w/o space at end (before ending above)
Taiwan	<code>^\d{8}\$ ^\d{2}\s\d{2}\s\d{2}\s\d{2}\$</code>	Eight digits; OR two digits followed by a space followed by two digits followed by a space followed by two digits followed by a space followed by two digits.	12345678; 12 12 12 12
Tajikistan	<code>^\d{9}\$</code>	Nine digits.	123456789

Authority	Registration Mask	Explanation	Example(s)
Tanzania	<code>^\d{8}\w{1}\$ ^\d{2}-\d{6}-\w{1}\$</code>	Eight digits followed by one alpha-numeric character OR two digits followed by a dash followed by 6 digits followed by a dash followed by one alpha-numeric character.	12345678A; 12345678a; 12-123456-A; 12-123456-a
Thailand	<code>^\d{2}\s\d{2}\s\d{2}\s\d{2}\s\d{2}\$ ^\d{10}\$ ^\d{13}\$</code>	Two digits followed by a space followed by two digits followed by a space followed by two digits followed by a space followed by two digits; OR ten digits; OR thirteen digits.	12 12 12 12 12; 1234567890;
Togo	<code>^\d{10}\$ ^\d{6}[A-Z]\$</code>	Ten digits; OR 6 digits followed by a letter.	1234567890; 123456A
Tonga	<code>^\d{6}\$</code>	Six digits.	123456
Trinidad and Tobago	<code>^\d{6}\$</code>	Six digits.	123456
Trinidad and Tobago Financial Services Tax	<code>^\d{6}\$</code>	Six digits.	123456

Authority	Registration Mask	Explanation	Example(s)
Tunisia	<code>^\d{7}[/]?[A-HJ-NP-TV-Z][/]?[APBDN][/]?[MPCNE][/]? \d{3}\$</code>	Seven digits followed by optional space or slash followed by single letter of alphabet except “I”, “O”, “U” followed by optional space or slash followed by one of the letters: A,P,B,D,N followed by optional space or slash followed by one of the letters: M,P,C,N,E followed by optional space or slash followed by three digits.	1234567AAM123; 1234567/A/A/M/123; 1234567 A A M 123
Turkey	<code>^\d{10}\$ ^\d{3}\s\d{3}\s\d{4}\$ ^\d{11}\$</code>	Ten digits; 11 digits; OR three digits followed by a space followed by three digits followed by a space followed by four digits.	1234567890; 123 123 1234; 12345678987
Turkey Special Consumption Tax	<code>^\d{10}\$ ^\d{3}\s\d{3}\s\d{4}\$ ^\d{11}\$</code>	Ten digits; 11 digits; OR three digits followed by a space followed by three digits followed by a space followed by four digits.	1234567890; 123 123 1234; 12345678987
Turkmenistan	<code>^\d{12}\$</code>	Twelve digits.	123456789014
Uganda	<code>^\d{10}\$</code>	Ten digits.	1234567890

Authority	Registration Mask	Explanation	Example(s)
Ukraine	$\wedge \backslash d\{3\} \backslash s? \backslash d\{3\} \backslash s? \backslash d\{3\} \backslash s? (\backslash d\{3\})? \$$	Three digits followed by an optional space followed by three digits followed by an optional space followed by three digits followed by an optional space followed by an optional three digits.	123 123 123; 123 123 123 123; 123123123; 123123123123; 123 123123; 123 123123123; 123123 123; 123123 123123; 123123 123 123
Ukraine Private Copy Levy	$\wedge \backslash d\{3\} \backslash s? \backslash d\{3\} \backslash s? \backslash d\{3\} \backslash s? (\backslash d\{3\})? \$$	Three digits followed by an optional space followed by three digits followed by an optional space followed by three digits followed by an optional space followed by an optional three digits.	123 123 123; 123 123 123 123; 123123123; 123123123123; 123 123123; 123 123123123; 123123 123; 123123 123123; 123123 123 123
United Arab Emirates – Abu Dhabi	$\wedge 1 \backslash d\{14\} \$$	1 followed by 14 digits.	123456789012345
United Arab Emirates – Ajman	$\wedge 1 \backslash d\{14\} \$$	1 followed by 14 digits.	123456789012345
United Arab Emirates – Dubai	$\wedge 1 \backslash d\{14\} \$$	1 followed by 14 digits.	123456789012345
United Arab Emirates – Fujairah	$\wedge 1 \backslash d\{14\} \$$	1 followed by 14 digits.	123456789012345
United Arab Emirates – Ras Al-Khaimah	$\wedge 1 \backslash d\{14\} \$$	1 followed by 14 digits.	123456789012345
United Arab Emirates – Sharjah	$\wedge 1 \backslash d\{14\} \$$	1 followed by 14 digits.	123456789012345
United Arab Emirates – Umm Al-Quwain	$\wedge 1 \backslash d\{14\} \$$	1 followed by 14 digits.	123456789012345

Authority	Registration Mask	Explanation	Example(s)
United Kingdom	^(GB)?\d{9}\$ ^(GB)?\d{12}\$ GB[A-Z]{2}\d{3}\$ XI\d{9}\$ XI\d{12}\$ XI[A-Z]{2}\d{3}\$ EU	An optional GB followed by nine digits; OR an optional GB followed by twelve digits; OR GB followed by any two capitalized letters A - Z followed by three digits; OR XI followed by nine digits; OR XI followed by twelve digits; OR XI followed by any two capitalized letters A - Z followed by three digits; OR EU.	GB123456789; 123456789; GB123456789012; 123456789012; GBAB123; XI123456789; XI123456789012; XIAB123; EU
United Kingdom Plastic Tax	^(GB)?\d{9}\$ ^(GB)?\d{12}\$ GB[A-Z]{2}\d{3}\$ XI\d{9}\$ XI\d{12}\$ XI[A-Z]{2}\d{3}\$	An optional GB followed by nine digits; OR an optional GB followed by twelve digits; OR GB followed by any two capitalized letters A - Z followed by three digits; OR XI followed by nine digits; OR XI followed by twelve digits; OR XI followed by any two capitalized letters A - Z followed by three digits.	GB123456789; 123456789; GB123456789012; 123456789012; GBAB123; XI123456789; XI123456789012; XIAB123.

Authority	Registration Mask	Explanation	Example(s)
United Kingdom Reverse Charge	^(GB)?\d{9}\$ ^(GB)?\d{12}\$ GB[A-Z]{2}\d{3}\$ ^XI\d{9}\$ ^XI\d{12}\$ ^XI[A-Z]{2}\d{3}\$ EU	An optional GB followed by nine digits; OR an optional GB followed by twelve digits; OR GB followed by any two capitalized letters A - Z followed by three digits; OR XI followed by nine digits; OR XI followed by twelve digits; OR XI followed by any two capitalized letters A - Z followed by three digits; OR EU.	GB123456789; 123456789; GB123456789012; 123456789012; GBAB123; XI123456789; XI123456789012; XIAB123; EU
Uruguay	^\d{12}\$	Twelve digits.	123456789012
Uruguay COFIS	^\d{12}\$	Twelve digits.	123456789012
Uzbekistan	^\d{9}\$ ^\d{12}\$	Nine digits OR twelve digits.	123456789; 123456789012
Vanuatu	^\d{6}\$	Six digits.	123456
Venezuela	^\w{1}-?\d{8}-?\d{1}\$	Any one alphanumeric character followed by an optional dash followed by eight digits followed by an optional dash followed by one digit.	a-12345678-1; 1-12345678-1; a12345678-1; 112345678-1; a-123456781; 1-123456781; a123456781; 1123456781
Vietnam	^\d{10}-?(\d{3})?\$	Ten digits followed by an optional dash followed by an optional three digits.	1234567890; 1234567890-; 1234567890123; 1234567890-123

Authority	Registration Mask	Explanation	Example(s)
Zambia	<code>^\d{4}\s\d{3}\s\d{3}\$ ^\d{8}/?\d{2}\$ ^\d{8}-?\d{2}\$</code>	Four digits followed by a space followed by three digits followed by a space followed by three digits; OR ten digits; OR eight digits followed by an optional dash followed by 2 digits; OR eight digits followed by an optional forward slash followed by 2 digits.	1234 567 890; 1234567890; 12345678/90; 12345678-90
Zimbabwe	<code>^\d{8}\$ ^2\d{8}\$</code>	Eight digits; OR 2 followed by 8 digits.	12345678; 212345678

For most up to date information, please consult the article at this link:

[Determination Registration Masks](#)